

Rapid return on investment

Cooking oil represents a significant cost in a busy commercial kitchen. The highly-efficient Opus 700 filtration system extends the working life of oil by up to 50%. The savings on oil costs means the system can often pay for itself within one year.

The example shown here is based on a typical high volume establishment.

Production variables

Model	OE7108/F	OE7113/F
Fryer oil capacity (litres)	35	32
Production days/year	365	365
Unfiltered oil life (days)	3	3
Unfiltered oil usage (litres per year)	4,258	3,893
Filtered oil life (days)	7	7
Filtered oil usage (litres per year)	1,825	1,669
Oil cost per litre	£0.90	£0.90
Premium carbon filter pads - price each	£0.88	£0.88

Annual cost comparisons

Model	OE7108/F	OE7113/F
Standard fryers without filtration		
Fryer oil costs per year	£3,833	£3,504
Premium carbon filter pads	£ -	£ -
Total cost per year	£3,833	£3,504
Advanced fryers with filtration		
Fryer oil costs per year	£1,643	£1,502
Premium carbon filter pads - costs per year	£321	£321
Total costs per year	£1,964	£1,823

Model	OE7108/F	OE7113/F
Annual cost savings with filtration models	£1,869	£1,681
Typical additional purchase price for filtration models	£1,450	£1,450
Payback period (months)	10	11
Annual oil savings (litres)	2,433	2,225

Inclusive Accessories

- 6 premium carbon filter pads
- Batter plate
- Spun wire, nickel plated baskets
- Tank lid

Optional Accessories

- **OA7904** - Narrow fryer basket
- **OA7937** - Premium carbon filter pads (pack of 30)

Technical Specifications

Description	OE7108/F	OE7113/F
Overall height (mm)	1050-1105	1050-1105
Height to hob (mm)	900-955	900-955
Width (mm)	600	600
Depth, excluding handles (mm)	737	737
Oil drain diameter (mm)	25	25
Electric power rating - kW	22.0	2 x 12.0
Electrical requirements	3 phase*	3 phase*
Voltage (1 / 3 phase)	- / 400V	- / 400V
Amps per phase	31.8/31.8/31.8	34.8/34.8/34.8
Weight (kg)	102	108

Note

* Can also be connected to either 2 x single or 2 x three phase supplies; please contact our sales office for details.

Filtration Fryers



All Opus 700 electric fryers combine heavy-duty performance, excellent reliability and accurate control with super-fast recovery, simple operation and easy cleaning.

Models with built-in oil filtration offer a safe and convenient way to maintain oil quality and produce better tasting, healthier food. And regular high-efficiency filtration extends the life of cooking oil, saving money and helping to protect the environment.

Powerful performance and high output from a minimum of floor space.



QUALITY GUARANTEED
You can choose Lincat products with confidence. All products in this leaflet are backed by the reassurance of a comprehensive UK two-year parts and labour warranty.



**Lincat Limited, Whisby Road,
Lincoln LN6 3QZ,
United Kingdom**

UK Sales Tel: 01522 875500 UK Spares Tel: 01522 875510 UK General Tel: 01522 875555
UK Fax: 01522 875530 International Sales Tel: +44 1522 503250 International Fax: +44 1522 875530
Website: www.lincat.co.uk UK Sales e-mail: sales@lincat.co.uk International Sales e-mail: export@lincat.co.uk



OE7108/F



OE7113/F

Features

Filtration System

- Simple to operate, the process takes just 4-6 minutes to filter a full tank, saving time and money
- Highly-efficient premium oil filtration media removes particles as fine as 0.5 microns (0.0005mm) and extends the life of cooking oil by up to 50%
- Well-filtered oil reduces oil smoking and improves the taste and quality of fried food
- In-built filtration eliminates the need to lift heavy containers, avoids contact with hot oil and reduces the chance of hazardous spillages
- Lower oil usage means reduced disposal costs and helps to protect the environment
- Enhanced food presentation

Frying Performance

- Close tolerance thermostat range 130°C to 190°C for accurate temperature control, consistent results and safe operation
- Hinged, lift-and-park element, with safety interlock, for easy tank access and cleaning
- Removable basket supports
- Model OE7113/F features two independently controlled fryer tanks for greater versatility




Heavy-duty spun wire, nickel plated baskets

Essential Facts & Figures

Model	Power (kW)	Width (mm)	Tank capacity (l)	No. of tanks	Tank dimensions - W x D (mm)	No. of baskets	Chips per hour*				Recommended batch weights per basket	
							Frozen		Chilled		lb	kg
OE7108/F	22.0	600	35	1	550 x 420	2	99	45	125	57	3.3	1.5
OE7113/F	2 x 12.0	600	2 x 16	2	250 x 420	2	143	65	176	80	3.3	1.5

* All fryer outputs are for standard 7/16" chips

The highly efficient filtration system uses premium oil filtration media to remove the finest of contaminants. This extends the working life of the oil by up to 50%, saving you money and helping to protect the environment.

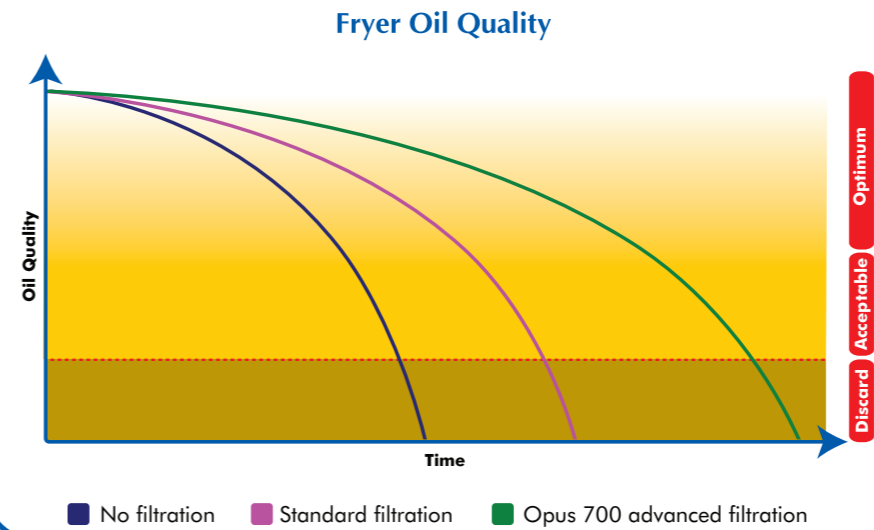

Premium carbon pad filter removes contaminants and particles as fine as 0.5 microns (0.0005mm)




Lift-and-park hinged elements

The Filtration Process


Simple to operate, the built-in filtration process takes just a few minutes for a full tank of oil.



Cooking oil is first filtered through the primary fine mesh filter to remove larger debris and food particles. The oil is collected in the built-in reservoir.

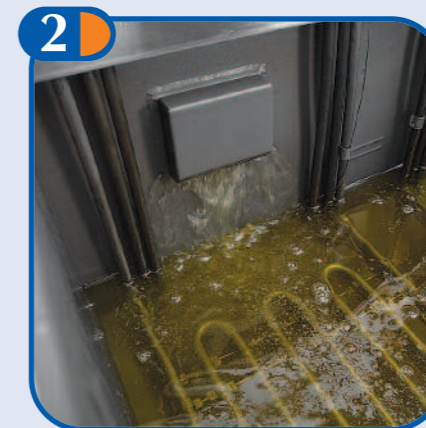

The oil then passes through the premium carbon pad filter to remove contaminants and fine particles and is pumped back into the fryer tank.

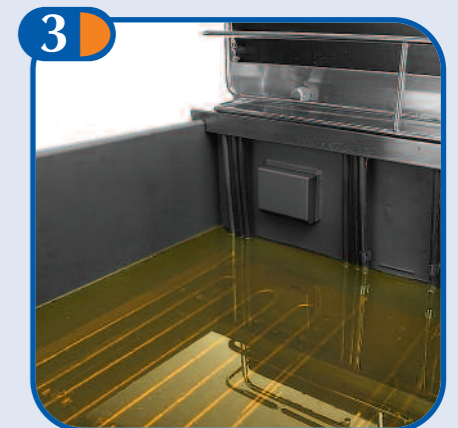

In just four to six minutes the filtration process is complete and the fryer is ready to use.