



*Technical information
Hurricane bottle coolers*

imc
fresh thinking

*display
performance
value*

overview

Hurricane bottle coolers are available in single and double door versions, with a choice of black or silver painted finishes. Each unit comes with adjustable shelving, temperature display and internal light as standard.

Features include electronic controller with auto defrost and forced air cooling for greater energy efficiency, a robust construction ensures long term reliability and low operating costs.

Additional features include:

- *Replaceable door seal for easy cleaning and increased product life span*
- *CFC-free and ozone friendly*
- *Ventilation to front of cabinet ensuring units can be fully built in*
- *Can be installed side by side with no gaps*

Standard Models

*H60 Single hinged door
H90 Double hinged door*

Options

*Two pin plug - for use in mainland Europe
Lock - for secure storage of contents*

product conformity

Hurricane bottle coolers are manufactured in accordance with the following European Directives:


*Machinery Directive (2006/42/EC)
Low Voltage Directive (73/23/EEC)
Electromagnetic Compatibility Directive (2004/108/EC)
Pressure Equipment Directive (97/23/EC)*

And in accordance with the following harmonised European Standards:

*EN 55014-1 Emissions and EN 55014-2 Immunity
(plus product specific standards)
BS EN 60335-1 and BS EN 60335-24*


product details

H60

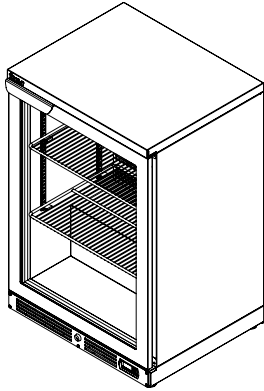

Storage Capacity		
330ml Bottles	135	
Operating Temperature		
Internal Operating Temperature (°C)	+4(+/- 2)	
Shipping Specifications		
Weight (kg) (Net)	51	
Weight (kg) (Gross)	56	
Packing Size (mm) (h x w x d)	1020 x 620 x 530	
Packing Volume (m ³)	0.34	
Electrical Information		
Voltage (Volts)	230	
Frequency (Hz)	50	
Phase	single	
Current Draw (Amps)	0.83	
Maximum Dimensions		
	Internal	External
Height (mm)	763	900
Width (mm)	536	600
Depth (mm)	381	500
Product Code Detail		
Options	Black	Silver
Standard	F74/060 B	F74/060 S
Standard with Lock	F74/060 BL	F74/060 SL
Euro Plug	F74/060 B EU	F74/060 S EU
Euro Plug with Lock	F74/060 BL EU	F74/060 SL EU

H90

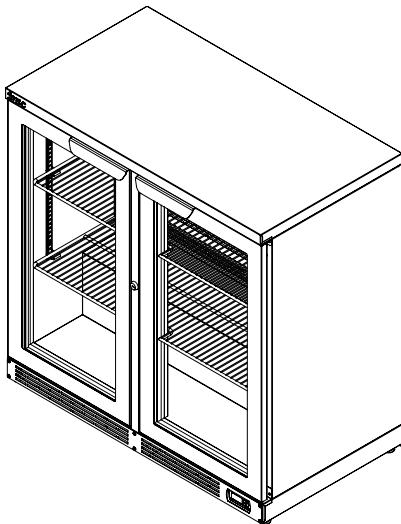

Storage Capacity		
330ml Bottles	204	
Operating Temperature		
Internal Operating Temperature (°C)	+4(+/- 2)	
Shipping Specifications		
Weight (kg) (Net)	73.5	
Weight (kg) (Gross)	79	
Packing Size (mm) (h x w x d)	1050 x 960 x 570	
Packing Volume (m ³)	0.58	
Electrical Information		
Voltage (Volts)	230	
Frequency (Hz)	50	
Phase	single	
Current Draw (Amps)	0.75	
Maximum Dimensions		
	Internal	External
Height (mm)	763	900
Width (mm)	836	900
Depth (mm)	381	500
Product Code Detail		
Options	Black	Silver
Standard	F74/090 B	F74/090 S
Standard with Lock	F74/090 BL	F74/090 SL
Euro Plug	F74/090 B EU	F74/090 S EU
Euro Plug with Lock	F74/090 BL EU	F74/090 SL EU



IMC was founded in 1906 and has since established itself as a leading manufacturer of commercial catering and bar equipment, with a reputation for quality, innovation and unrivalled customer service.

Imperial Machine Company Ltd

Unit 1 Abbey Road
Wrexham Industrial Estate
Wrexham LL13 9RF
United Kingdom

t +44 (0)1978 661155

f +44 (0)1978 729990

e sales@imco.co.uk

w www.imco.co.uk

IMC reserves the right to make changes without prior notification

imc
freshthinking

BDB/HBC-TI/0110