

Tumble dryer

T4290

Features and benefits

- High productivity - 2 full loads per hour
- Selection of temperature and time for easy operation
- Large door opening for easy loading and unloading
- Large selfcleaning lint screen for easy maintenance
- Easy access to vital parts from front and rear for simple servicing
- Selecta Microprocessor control
 - 2 auto stop programs for extra dry and dry
 - 5 to 9 tailor made programs for any drying need
 - Accurate temperature control for unmatched drying accuracy
 - Anti-crease cycle for avoiding creasing if the dryer is not unloaded
 - Error codes for easy trouble shooting
 - High contrast display
- Serviceprogram for adjustment of parameters eg. temperature and cooldown time

Main options

- Stainless steel front
- Stainless steel drum
- Residual Moisture Control - RMC
- Payment: coinmeter, chip card reader, CP connection, intelligent communication
- Reversing drum
- Heat recovery system: Heat Recovery Pipes (HRP)
- CMIS
- Fresh air intake
- Emergency stop button
- Supply disconnecter






Main specifications			T4290			
Rated capacity,	filling factor 1:18	kg/lb	16/35			
	filling factor 1:25	kg/lb	11.4/25			
Drum volume		litre	286			
Drum diameter		mm	680			
Heating alternatives	electric	kW	13.5/18			
	gas	BTU/h (kW)	71 700 (21)			
	steam at 600-700 kPa	kW	27			
Consumption data*			13.5 kW	18 kW	Gas	Steam
Total time at 13.5 kg	min		35	29	25	27
Energy consumption at 13.5 kg	kWh		7.3	8.5	8	13.7
Evaporation	g/min		198	234	272	256
Energy kWh/litre water evaporated	kWh/l		1.06	1.25	1.18	1.98

* At rated capacity 100% cotton load at 50% initial moisture dried to 0%.

Certified in accordance with ISO 9001 and ISO 14001 and approved IP 42.

Electrical connections			T4290	
Heating Voltage				
El.	200-240V 3AC 50/60 Hz	kW(A)	15 (50)	
		kW(A)	19.5 (63)	
	400-415V 3(N)AC 50 Hz**	kW(A)	15 (25)	
	400-480V 3AC 60 Hz	kW(A)	19.5 (35)	
Gas or steam	230-240V 3AC 50/60 Hz	kW(A)	0.4 (10)	
	400-440V 3(N)AC 50/60 Hz**	kW(A)	0.4 (10)	
	230V 1AC 50 Hz	kW(A)	0.4 (10)	
	120V 1AC 60 Hz	kW(A)	0.4 (10)	
Steam, gas and air connections				
Steam	ISO 7/1-R		1/2"	
Steam pressure		kPa	100-1000	
Steam consumption		kg/h	50-54	
Condensate	ISO 7/1-R		1/2"	
Gas	NG/PG	ISO 7/1-R	1/2"	
	TG		3/4"	
Gas pressure	Natural gas	Pa	2000	
		mbar	20	
	Propane	Pa	2800-3700	
		mbar	28-37	
Air outlet		mm	Ø 200	
Evacuated air,	el steam gas		430 (13.5)/690 (18)	
			925	
			690	
Pressure drop (el/steam/gas)	Max. Pa		80/80/20	
Sound levels				
Airborne sound level		dB(A)	<70	
Heat emission				
% of installed power, max			15	
Shipping data (el/steam/gas)				
Shipping volume	net, kg		220/220/220	
	crated, kg		235/235/235	
	boxed, kg		315	
	crated, m ³		1.78	
	boxed, m ³		2.03	
Accessories				
Heat recovery pipes			HRP290	
Fresh air intake			x	
Dimensions in mm				
A	Width		710	
B	Depth		1120	
C	Height		1880	
D			780	
E			725	
F			1610	
G			470	
H			135	
I			170	
J			700	
K			1810	
L			1395	
M			250	
N			500	
O			70	
P			190	
R			500	
S			10	
1	Control panel		5	Steam connection
2	Door opening Ø 580		6	Condensate connection
3	Electrical connection		7	Exhaust connection
4	Gas connection			

** N is selected when using external connection.

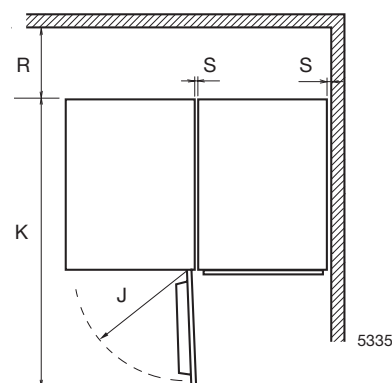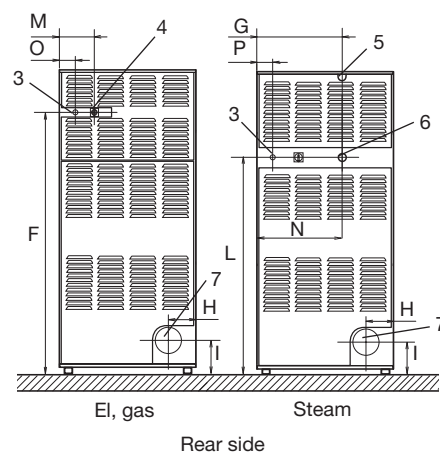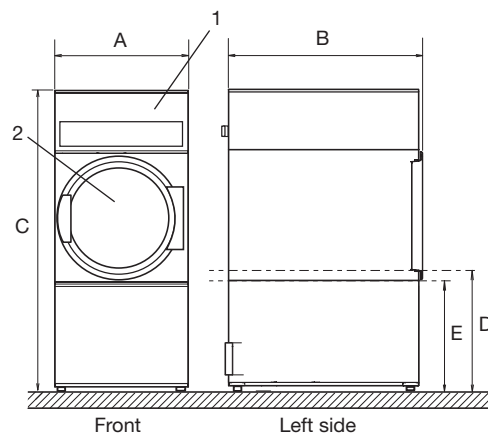

Electrolux

www.electrolux.com/professional

Share more of our thinking at www.electrolux.com

Art. No. 438903181/01 07.04
We reserve the right to alter specifications without notice.