

Product Code: EP1440H4 10-202 EcoPro G2 1350 Litre Upright Half Door Refrigerated Cabinet



Features & Benefits

- Sleek, modern asthetics, robust construction and market leading capacity. 'Smartphone style' fuzzy logic II touch sensitive control panel with high visibility temperature display
- · Low energy refrigerant system with reduced running costs
- Improved internal fittings for easy cleaning
- Foster Circulair II air distribution system maximises efficient operation even when shelves are fully loaded
- Operates efficiently in ambients up to 43°C
- Half door option designed to save energy
- Keep accessible products in the top section, bottom half can remain shut for longer preventing cold air loss.
- Features Foster's new award-winning +stayclear condenser, revolutionising the effective operation of your refrigeration, ensuring your equipment works more efficiently for longer

External Finish		Internal Finish		Shelving	
s/steel ext, 304 s/s door	Standard	aluminium	Standard	Additional S/S Trayslides	Option
304 S/S back for island sittin	g Option	Doors		Additional GN2/1 Shelf	Option
Base Fittings		Half	Standard	Refrigeration	
Castors 80mm	Standard	Product Extra		R290 - Energy Efficient	Standard
Legs 150mm	Option		5	Integral Refrigeration System	Standard
Electrical Service & Ecodesian			-		
Electrical Service & E	odesian	Helicoil Mains Lead	Option	Less Condensing Unit	Option
Electrical, Service & Eo Data	codesign	Helicoil Mains Lead	Option	Less Condensing Unit Remote Refrigeration System	Option Option
	codesign Standard	Helicoil Mains Lead	Option		•
Data	Ŭ	Helicoil Mains Lead	Option	Remote Refrigeration System	•
Data 230/50/1 220/60/1 Electrical Supply	Standard	Helicoil Mains Lead	Option	Remote Refrigeration System Specification	Option
Data 230/50/1	Standard Option	Helicoil Mains Lead	Option	Remote Refrigeration System Specification Dimensions (Width)	Option 1440
Data 230/50/1 220/60/1 Electrical Supply Fuse Required	Standard Option 13	Helicoil Mains Lead	Option	Remote Refrigeration System Specification Dimensions (Width) Dimensions (Height)	Option 1440 2080
Data 230/50/1 220/60/1 Electrical Supply Fuse Required	Standard Option 13	Helicoil Mains Lead	Option	Remote Refrigeration System Specification Dimensions (Width) Dimensions (Height) Dimensions (Depth)	Option 1440 2080 820


Noise Dba @ 1M

69.8

Footnotes

- 150mm castors are not available if product is supplied less condensing unit
- Adequate airflow and service space must be kept above the top of cabinet: 310mm
- Depth with door open is 1500mm
- Decibel rating measured 1m high from the floor and 1m out from the cabinet

Energy Performance Data and information

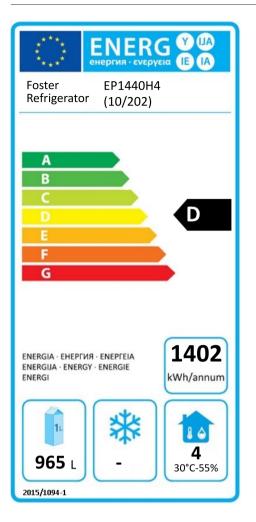

Application

This appliance is intended for use in ambient temperatures up to 40°C **Safety**

Precautionary instructions and maintenance advice, to ensure efficient operation, can be found in this products operating instructions.

Recycling

For recycling and end of life care for this product, please refer to environmental section of the website or visit our policies



Foster Refrigerator, Oldmedow Road, King's Lynn, Norfolk, PE30 4JU Phone 08432 168800 | Email sales@foster-uk.com | Visit www.fosterrefrigerator.com