

Product Code: EP2/3H 12-396

EcoPro G2 2/3 Refrigerated Counter with 100mm Splashback



Features & Benefits


- High Quality 304 Stainless Steel Exterior Build Quality
- ECA Scheme Approved as ECA products are guaranteed to be energy efficient, money can be claimed back on your investment
- Smartphone style' touch sensitive hidden until lit control pannel
- Fully floating lock provides durable security and prevents lock breakage if the key is left in
- Energy-saving Hydrocarbon refrigerant option at no extra cost
- High performance cyclopentane foam
- Airlines' ventilation system reduces compressor running time by 15%
- Take the travel out of food preparation
- 100mm 304 s/s splashback to prevent spillage behind the counter

External Finish		Internal Finish		Shelving	
304 s/s	Standard	aluminium	Standard	Gastronorm Pans	Option
304 S/S back for island sitting	Option	Doors		Additional S/S Trayslides	Option
Worktop	Standard	D0013		Additional GN2/1 Shelf	Option
Base Fittings		Solid Draduct Future	Standard	Refrigeration	
100mm legs in lieu of castors	Option	Product Extras		R290 - Energy Efficient	Standard
Castors 80mm	Standard	Helicoil Mains Lead	Option	Integral Refrigeration System	Standard
Legs 150mm	Option			RH Mounted Ref Unit	Option
Electrical, Service & Ecodesign Data				Specification	
				Dimensions (Width)	2480
230/50/1	Standard			Dimensions (Height)	865
Fuse Required	13			Dimensions (Depth)	800
Global Warming Potential	3			Weight (Unpacked, kg)	162.5
Energy Efficiency Index	31.66			Weight (Packed, kg)	193.71
Refrigerant Charge	0.150			Gross Volume	760
kWh (24 hours)	2.70			Noise Dba @ 1M	ТВС

Footnotes

- · Castors not available if product supplied less condensing unit
- 100mm leg option: height ranges from 835 to 865mm (replacement for standard castors). 150mm legs: height ranges from 885 to 935mm

- Depth with door open is 1113mm
- Decibel rating measured 1m high from the floor and 1m out from the counter
- 60Htz model supplied as 220v machine with separate transformer for conversion to 115v supply.
- Adequate airflow must be kept around the counter: 150mm

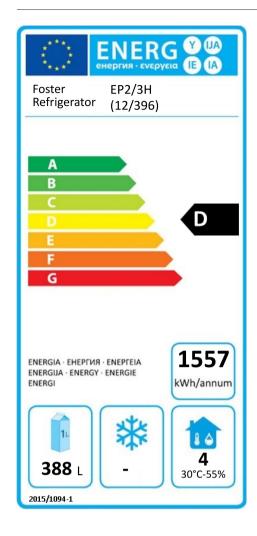

Application

This appliance is intended for use in ambient temperatures up to 40°C **Safety**

Precautionary instructions and maintenance advice, to ensure efficient operation, can be found in this products operating instructions.

Recycling

For recycling and end of life care for this product, please refer to environmental section of the website or visit our policies













Foster Refrigerator, Oldmedow Road, King's Lynn, Norfolk, PE30 4JU Phone 08432 168800 | Email sales@foster-uk.com | Visit www.fosterrefrigerator.com