

OSBORNE REFRIGERATORS

Shown - 276ES GSS

Also available in black or silver
with glass or solid doors




Features

Fan assisted evaporator for rapid cooling
Fan assisted condenser for efficient running
Automatic defrost and re-evaporation
LED lighting & low voltage fans
Digital temperature controller
Double glazed lockable doors front & rear

Options

Solid lockable doors to front and/or rear
Sliding doors to front OR rear (not both)
Fixed double glazed panel to front or rear
Choice of colours
Stainless steel exterior and/or interior
Stainless steel doors (frame/solid)
Castors (add 100mm to height)

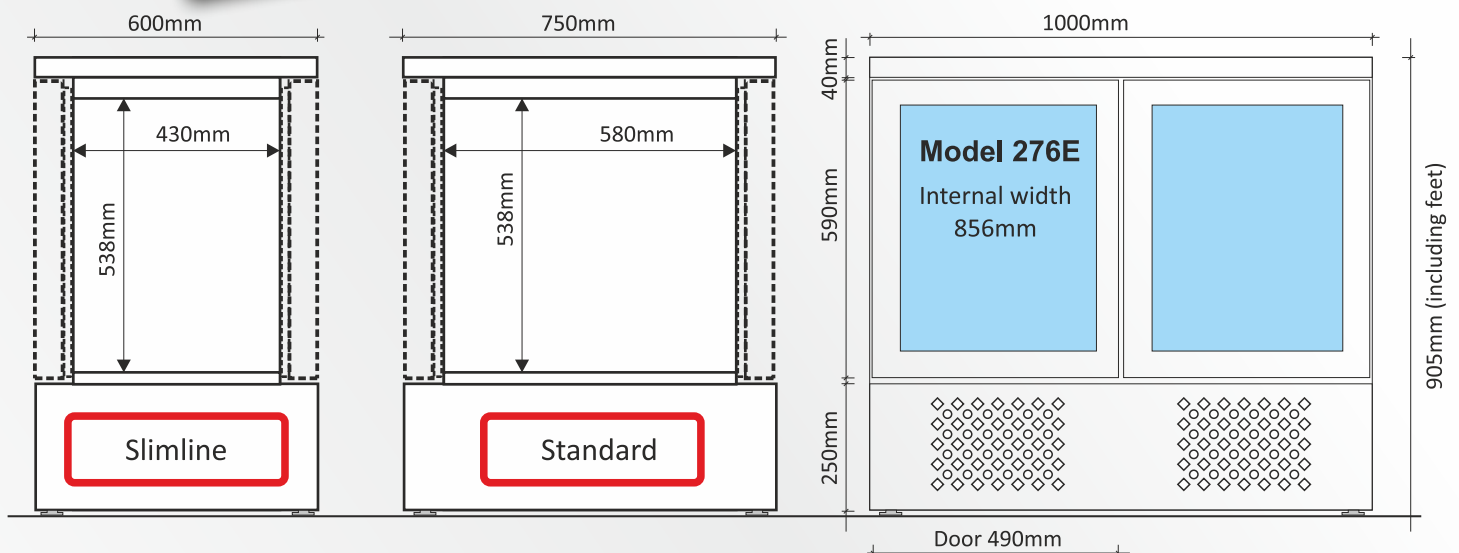

Size

Height (mm)
Width (mm)
Depth (mm)

Capacities

Bottles (330ml/236mm high)
Nett Capacity (ltr)
Gross Weight Packed (kg)

Technical Info

Rated Power (W)
Refrigerant Type
Refrigerant Charge (g)
Product Temperature Range (°C)

276E

905
1000
750

250
290
100

130
R600a
85
1-5

276E Slim

905
1000
600

approx 180
210
100


130
R600a
58
1-5



OSBORNE REFRIGERATORS LTD
Rose Green Road
Bognor Regis
West Sussex
PO21 3EG
United Kingdom

Tel +44 1243 267711
sales@osborne-ref.co.uk
www.osbornerefrigerators.uk
@osbornerefrigeratorsltd
@osbornerefrigeratorsltd
@osbornerefrigerators




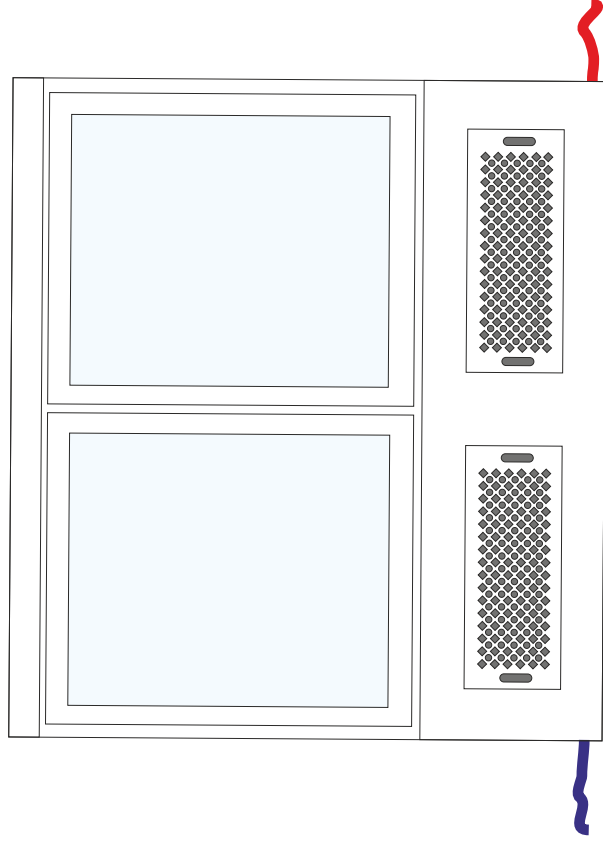


Front




Airflow Out

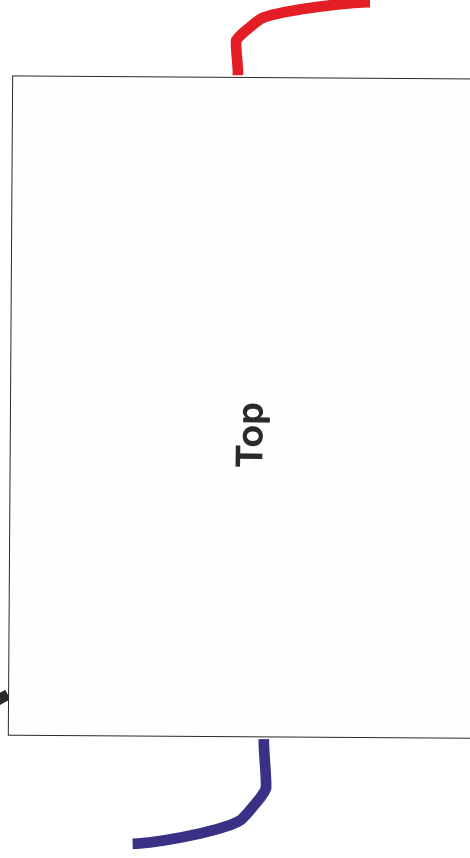

Top



Airflow In

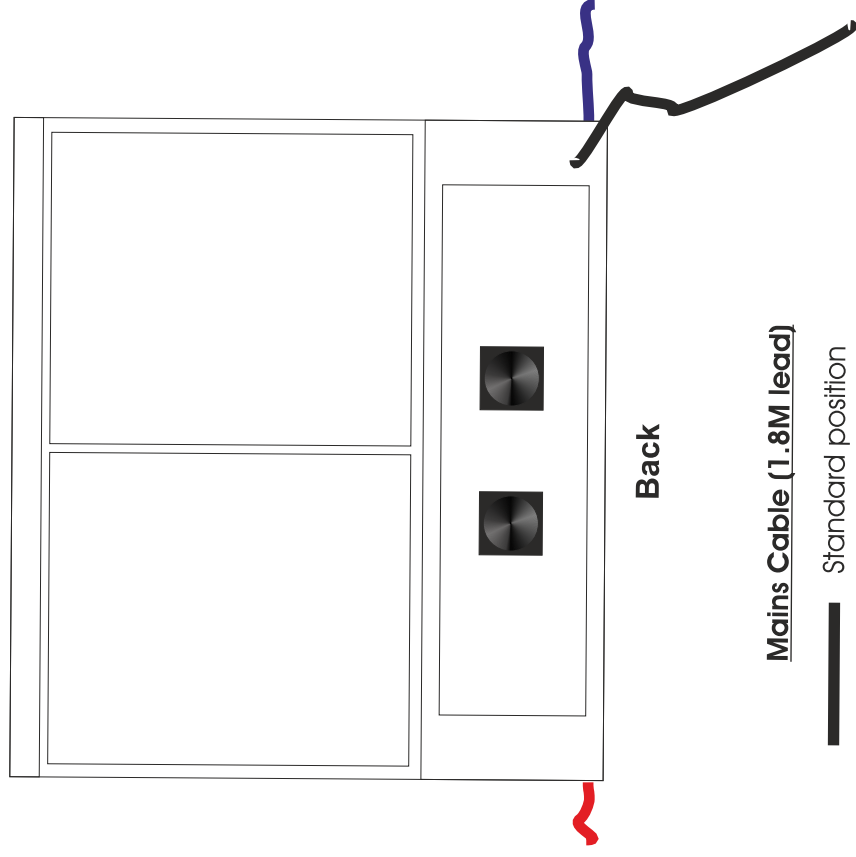

Back

Mains Cable (1.8M lead)

- Standard position
- Alternative position
- Alternative position

276E / 276E SLIM

2023 → Version (twin refrigeration system)

When purchasing, please mark preferred cable position, and sliding and / or solid door positions if applicable, and attach it to your purchase order.