



1200-UP SERIES LOW TEMPERATURE HOT HOLDING CABINETS



SHOWN WITH UNIVERSAL ANGLES




- HALO HEAT... a controlled, uniform heat source that gently surrounds food for better appearance, taste, and longer holding life.
- Holds hot food hot...meat, poultry, fish, potatoes, casseroles, vegetables, rolls, etc.
- Dual purpose — both a holding cabinet and dough proofer.
- Universal rack design accommodates standard full-size (gastronorm) pans or full-size sheet pans.
- Can be converted with side racks to accommodate shelves for full size gastronorm pans or full size sheet pans.
- Stainless steel interior resists corrosion.
- Casters provide easy mobility.
- Antimicrobial handle retards the growth of illness-causing pathogens.
- Digital control senses temperature drops faster, providing quick heat recovery time.
- Door venting holds crispy food better.


Two (2) individually controlled oven compartments are enclosed in one 20 gauge stainless steel exterior and doors. Each controlled compartment has one (1) Simple Control with ON/OFF power switch; Up and Down Arrow Keys with a temperature range of 60° to 200°F (16° to 93°C); indicator light, and digital display. Each compartment is equipped with two (2) universal side rails and four (4) sets of chrome plated pan slides designed to accommodate standard full-size pans. Pan supports are adjustable in sixteen (16) positions on 1-3/4" (44mm) centers, and one (1) set of 5" (127mm) heavy duty casters – 2 rigid and 2 swivel with brake.

MODEL 1200-UP Double compartment holding cabinet

DELUXE CONTROL OPTION



- Solid state electronic control option simplifies temperature setting and has a clear, easy-to-read LED display and includes our patented SureTemp™ heat recovery system. SureTemp™ reacts immediately to compensate for any loss of heat whenever the door is opened.
- Deluxe control is also available with six independent multiple timers for each compartment to facilitate "first-in, first-out" concept.
- Deluxe control with internal temperature probe.



ANSI/NSF 4



FACTORY INSTALLED OPTIONS

- Electrical Choices
 - ➔ Specify Voltage:
 - 120
 - 208-240 (2000W)
 - 208-240 (4000W)
 - 230 (2000W)
 - 230 (4000W)
- Cabinet Choices
 - ➔ Specify Cabinet:
 - Reach-In, standard
 - Pass-Through, optional

- Door Choices
 - ➔ Specify Door:
 - Solid Door, standard
 - Window Door, optional
 - ➔ Specify Door Swing:
 - Right-hand swing, standard
 - Left-hand swing, optional

Note: Pass-through cabinets cannot have all doors hinged on the same side.

ADDITIONAL FEATURES

- Side Rack Model
 - As an alternative to universal pan slides, this unit can be ordered as a "side rack" model which is equipped with two (2) side racks and three (3) chrome plated wire shelves. It will accommodate full and half size US hotel and European gastronorm pans on the side racks, or sheet pans on shelves.*




W164 N9221 Water Street • P.O. Box 450 • Menomonee Falls, Wisconsin 53052-0450 • U.S.A.

PHONE: 262.251.3800 800.558.8744 U.S.A./CANADA FAX: 262.251.7067 800.329.8744 U.S.A. ONLY

www.alto-shaam.com

1200-UP SERIES

LOW TEMPERATURE HOT HOLDING CABINETS

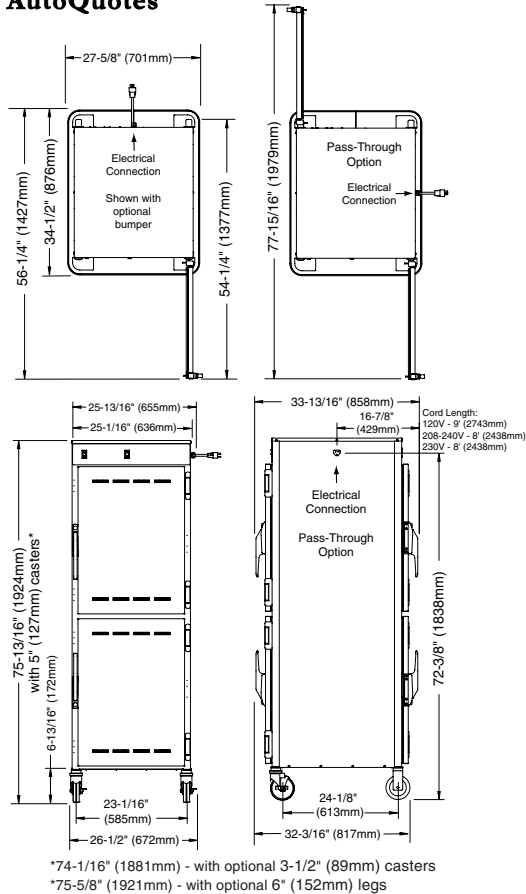

| PRODUCT \ PAN CAPACITY (PER COMPARTMENT) | | |
|--|--------------------------------------|---|
| 192 lbs (87kg) MAXIMUM • VOLUME MAXIMUM: 120 QUARTS (152 LITERS) | | |
| Pan slides (2 per set) - 1-3/4 (44mm) centers | | |
| Pan Size | Four (4) sets of pan slides provided | Maximum capacity with additional pan slides |
| FULL SIZE: 20" x 12" x 2-1/2" GN1/1: 530mm x 325mm x 65mm | Eight (8) pans - 2 per set of slides | Sixteen (16) pans - with 4 additional sets of pan slides |
| FULL SIZE: 20" x 12" x 4" GN1/1: 530mm x 325mm x 100mm | Eight (8) pans - 2 per set of slides | NO ADDITIONAL CAPACITY |
| FULL SIZE: 20" x 12" x 6" 530mm x 325mm x 150mm | Eight (8) pans - 2 per set of slides | NO ADDITIONAL CAPACITY |
| FULL SIZE SHEET PANS: 18" x 26" x 1" | Four (4) pans - 1 per set of slides | Sixteen (16) pans - with 12 additional sets of pan slides |
| Side Racks and Shelves | | |
| Pan Size | Three (3) shelves provided | Maximum capacity with additional shelves |
| FULL SIZE: 20" x 12" x 2-1/2" GN1/1: 530mm x 325mm x 65mm | Sixteen (16) pans - 2 per side rack | NO ADDITIONAL CAPACITY |
| FULL SIZE: 20" x 12" x 4" GN1/1: 530mm x 325mm x 100mm | Eight (8) pans - 2 per side rack | NO ADDITIONAL CAPACITY |
| FULL SIZE: 20" x 12" x 6" GN1/1: 530mm x 325mm x 150mm | Eight (8) pans - 2 per side rack | NO ADDITIONAL CAPACITY |
| FULL SIZE SHEET PANS: 18" x 26" x 1" | Three (3) pans - 1 per shelf | Eight (8) pans with 5 additional shelves |

| DIMENSIONS: H x W x D | |
|----------------------------|---|
| EXTERIOR: | 75-13/16" x 25-1/16" x 32-3/16" (1924mm x 636mm x 817mm) |
| PASS-THROUGH: | 75-13/16" x 25-13/16" x 33-13/16" (1924mm x 655mm x 858mm) |
| INTERIOR EACH COMPARTMENT: | 28-3/4" x 21-5/16" x 26-1/2" (730mm x 541mm x 673mm) |

| INSTALLATION REQUIREMENTS | |
|---|--|
| — Oven must be installed level. | |
| — The oven must not be installed in any area where it may be affected by steam, grease, dripping water, extreme temperatures, or any other severely adverse conditions. | |
| — Appliances with casters and no cord or plug must be secured to the building structure with a flexible connector. NOT FACTORY SUPPLIED. | |

| CLEARANCE REQUIREMENTS | | |
|------------------------|----------------|------------------|
| BACK: 3" (76mm) | TOP: 2" (51mm) | SIDES: 1" (25mm) |

| OPTIONS & ACCESSORIES | |
|--|----------|
| <input type="checkbox"/> Bumper, Full Perimeter | 5012932 |
| <input type="checkbox"/> Casters, 3-1/2" (76mm) - 2 RIGID, 2 SWIVEL W/ BRAKE | 5008017 |
| <input type="checkbox"/> Door Lock with Key (EACH HANDLE) | LK-22567 |
| <input type="checkbox"/> Handle Kit, Push/Pull (SET OF FOUR) | 55662 |
| <input type="checkbox"/> Legs, 6" (152mm), Flanged (SET OF FOUR) | 5011149 |
| <input type="checkbox"/> Pan Grid, Chrome Plated, Wire | PN-2115 |
| PAN INSERT 18" x 26" (457mm x 660mm x 25mm) | |

| ELECTRICAL | | | | | | | |
|--------------------|------------------|-------|----------|------|-----|---------------|--|
| | VOLTAGE | PHASE | CYCLE/HZ | AMPS | KW | CORD & PLUG | |
| 120 | 120 (AGCY) | 1 | 60 | 16.0 | 1.9 | NEMA 5-20P, | |
| | 120 | 1 | 60 | 16.0 | 1.9 | 20A-125V PLUG | |
| 208 - 240 2000W | 208-240 (AGCY) | 1 | 60 | 8.0 | 1.9 | NEMA 6-15P, | |
| | at 208 | 1 | 60 | 7.0 | 1.4 | 15A-250V PLUG | |
| | at 240 | 1 | 60 | 8.0 | 1.9 | (USA ONLY) | |
| | 208-240 (AGCY) | 1 | 60 | 16.0 | 3.8 | NO CORD | |
| 4000W | at 208 | 1 | 60 | 14.0 | 2.9 | OR PLUG | |
| | at 240 | 1 | 60 | 16.0 | 3.8 | | |
| 230 | 230 2000W (AGCY) | 1 | 50 | 7.7 | 1.8 | CEE 7/7, | |
| | 230 4000W (AGCY) | 1 | 50 | 15.4 | 3.5 | 220-230V PLUG | |

| WEIGHT | |
|--|-----------------|
| NET: | 333 lb (151g) |
| SHIP: (EST.) | 393 lb (178 kg) |
| CARTON DIMENSIONS: (L x W x H) 35" x 35" x 82" (889mm x 889mm x 2083mm) | |

| | |
|--|----------|
| <input type="checkbox"/> Drip Pan with Drain 1-11/16" (43mm) | 5014448 |
| <input type="checkbox"/> Security Panel with Lock | 5013936 |
| <input type="checkbox"/> Shelf, Stainless Steel | SH-23738 |
| <input type="checkbox"/> Shelf, Chrome Plated | SH-2733 |
| <input type="checkbox"/> Universal Pan Slides, Chrome Plated | SR-24447 |
| <input type="checkbox"/> Universal Pan Slides, Stainless Steel | SR-24762 |
| <input type="checkbox"/> Water Reservoir Pan (FOR PROOFING) | 1775 |
| <input type="checkbox"/> Water Reservoir Pan Cover | 1774 |