


**371221 (E7KKQTBAMCG)**

e-XP OptiOil Fryer HP, 10-lt, electric, free standing, 1 well (internal heating elements), 1 basket and lid included

**Included Accessories**

PNC Code	Description	Quantity
200029	Kit for advanced filtration system for OptiOil fryers - 700 line	1
200954	Stainless steel oil filter for OptiOil fryers	1
206350	Door for open base cupboard	1
921028	1 full size basket for 10lt OptiOil fryers	1

**Optional Accessories**

PNC Code	Description
<b>Bases &amp; base accessories</b>	
206350	Door for open base cupboard
<b>Baskets</b>	
921028	1 full size basket for 10lt OptiOil fryers
921029	2 half size baskets for 10lt OptiOil fryers
<b>Bridge supports</b>	
206154	Support for bridge type installation, 400mm
<b>Chimney upstands</b>	
206303	Chimney upstand, 400mm
206400	Chimney grid net, 400mm (700XP/900)



PNC Code	Description
<b>Feet, wheels and ramps</b>	
206136	Flanged feet kit
206210	Kit 4 feet for concrete installation (not for 900 line free standing grill)
206366	Base support for feet or wheels - 400mm (700/900)
206367	Base support for feet or wheels - 800mm (700/900)
206368	Base support for feet or wheels - 1200mm (700/900)
206369	Base support for feet or wheels - 1600mm (700/900)
206370	Base support for feet or wheels - 2000mm (700/900)
206431	Base support for feet or wheels - 600mm (700/900)
<b>Grease/oil management</b>	
200029	Kit for advanced filtration system for OptiOil fryers - 700 line
200085	Pack of 100 paper filters for advanced filtration system for 23lt fryers with oil pump and OptiOil fryers
200087	Kit oil pump drain extension for 23lt fryers with oil pump and OptiOil fryers
200954	Stainless steel oil filter for OptiOil fryers
<b>Handrails</b>	
206307	Right and left side handrails
206308	Back handrail 800 mm
<b>Installation solutions</b>	
206086	Junction sealing kit
<b>Kicking strips</b>	
206147	Frontal kicking strip for concrete installation, 400mm
206148	Frontal kicking strip for concrete installation, 800mm
206150	Frontal kicking strip for concrete installation, 1000mm
206151	Frontal kicking strip for concrete installation, 1200mm
206152	Frontal kicking strip for concrete installation, 1600mm
206175	Frontal kicking strip, 400mm (not for refr-freezer base)
206176	Frontal kicking strip, 800mm (not for refr-freezer base)
206177	Frontal kicking strip, 1000mm (not for refr-freezer base)
206178	Frontal kicking strip, 1200mm (not for refr-freezer base)
206179	Frontal kicking strip, 1600mm (not for refr-freezer base)
206249	Pair of side kicking strips
206265	Pair of side kicking strips for concrete installation
<b>Panels</b>	
206373	Rear paneling - 600mm (700/900XP)
206374	Rear paneling - 800mm (700/900)
206375	Rear paneling - 1000mm (700/900)
206376	Rear paneling - 1200mm (700/900)
216000	2 side covering panels for free standing appliances



**Recommended Detergents**

PNC Code	Description
OS2292	C41 HI-TEMP RAPID DEGREASER, 1 pack of six 1 lt. bottles (trigger incl.)
OS2881	S01 STAINLESS STEEL SURFACE POLISHER; 6 BOTTLES X 750ML C/T
OS2882	S02 Degreaser for ovens and SpeedDelight. Specific for cleaning the cooking chambers of GourmeXpress and SpeeDelight Active up to a maximum of 50°C Complete with spray bottle Pack of 6 750ml bottles
OS2883	S03 ALCOHOL BASE DETERGENT; 6 BOTTLES X 750ML; ADR&IMDG&IATA Limited Quantity
OS2884	S04 GLASSES & HARD SURFACES CLEANERS; 6 BOTTLES X 750ML
OS3257	S05 - MULTIPURPOSE DEGREASER; 6PCS X 750ML; ADR&IMDG Limited Quantity



# Technical specifications


## Electric

Supply voltage:	380-415 V/3N ph/50-60 Hz
Total Watts:	12 kW
<b>Key Information:</b>	
Usable well dimensions (width):	240 mm
Usable well dimensions (height):	203 mm
Usable well dimensions (depth):	380 mm
Well capacity:	9 lt MIN; 12 lt MAX
Thermostat Range:	100 °C MIN; 185 °C MAX
External dimensions, Width:	400 mm
External dimensions, Depth:	730 mm
External dimensions, Height:	850 mm
Net weight:	48.5 kg
Shipping weight:	54 kg
Shipping height:	1120 mm
Shipping width:	480 mm
Shipping depth:	820 mm
Shipping volume:	0.44 m <sup>3</sup>
Certification group:	eXPEFI7II0


## ISO Certificates

ISO Standards:	ISO 9001; ISO 14001; ISO 45001; ISO 50001
----------------	--


## Front

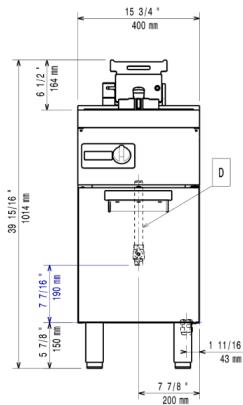

## Side

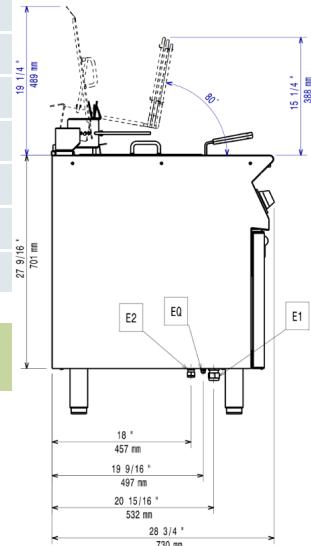

## Top

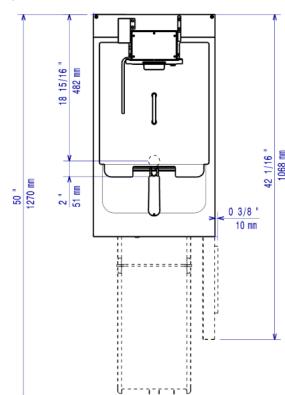

EI = Electrical inlet (power)

EQ = Equipotential screw

DO = Overflow drain pipe



Find out more:  
ISO Certificates  
Electrolux Professional Recognitions

The company reserves the right to make modifications to the products without prior notice. All information correct at time of printing.

02/02/2026

4/4