

**391666 (E9HHEDBAMCA)**

e-XP Free-zone Induction Cook Top, electric, 8 coils (2kW each)

Main Features

- The free zone induction offers the possibility to use multiple pots and pans, even small sizes (min diameter 7 cm), thanks to the multi-coil system design that makes all the surface active, ideal for à la carte menu.
- Each zone UI features a display and a knob, controlling simultaneously the 4 coils in the same zone.
- The smooth glass-ceramic surface features limited temperature increase and it can be quickly and easily cleaned, thus providing maximum hygiene.
- Power level setting from 1 to 30 or temperature settings from 30 to 250° C.
- Low heat dissipation to the kitchen.
- The smooth, glass ceramic plate is not directly heated, so there is no burning on cooking surface.

Construction

- All exterior panels in Stainless Steel with Scotch Brite finishing.
- Model has right-angled side edges to allow flush fitting joints between units, eliminating gaps and possible dirt traps.
- One piece pressed 2 mm work top in Stainless steel.
- Unit is 930 mm deep to give a larger working surface area.
- Closed technical base, containing generators, ventilation system and filters.
- Electronic sensor, placed underneath the glass, below the coil center position, to measure the temperature of the pan/pot bottom.
- All major components may be easily accessed from the front, including the induction filters.
- IPX5 water resistance certification.
- Minimum pan base diameter: 7cm.

Sustainability

- This model is compliant with Swiss Energy Efficiency Ordinance (730.02).



Optional Accessories

PNC Code	Description
Bridge supports	
206137	Support for bridge type installation, 800mm
206138	Support for bridge type installation, 1000mm
206139	Support for bridge type installation, 1200mm
206140	Support for bridge type installation, 1400mm
206141	Support for bridge type installation, 1600mm
206154	Support for bridge type installation, 400mm
Chimney upstands	
206303	Chimney upstand, 400mm
Containers, trays and grids	
206404	Stainless steel grid for free standing grills (900XP)
Installation solutions	
206086	Junction sealing kit
Panels	
216278	2 side covering panels for top appliances
Water taps	
206290	Water column extension for 900 line
Other accessories	
921026	Peak management system for Free-zone Induction, half module (8 coils)

Recommended Detergents

PNC Code	Description
OS2292	C41 HI-TEMP RAPID DEGREASER; 1 pack of six 1 lt. bottles (trigger incl.)
OS2881	S01 STAINLESS STEEL SURFACE POLISHER; 6 BOTTLES X 750ML C/T
OS2882	S02 Degreaser for ovens and SpeedDelight. Specific for cleaning the cooking chambers of GourmeXpress and SpeeDelight. Active up to a maximum of 50°C Complete with spray bottle Pack of 6 750ml bottles
OS2883	S03 ALCOHOL BASE DETERGENT; 6 BOTTLES X 750ML; ADR&IMDG&IATA Limited Quantity
OS2884	S04 GLASSES & HARD SURFACES CLEANERS; 6 BOTTLES X 750ML
OS3257	S05 - MULTIPURPOSE DEGREASER; 6PCS X 750ML; ADR&IMDG Limited Quantity



Technical specifications


Electric

Supply voltage:	380-415 V/3N ph/50-60 Hz
Total Watts:	16 kW
Key Information:	
External dimensions, Width:	400 mm
External dimensions, Depth:	930 mm
External dimensions, Height:	850 mm
Net weight:	71.5 kg
Shipping weight:	78.5 kg
Shipping height:	520 mm
Shipping width:	460 mm
Shipping depth:	1020 mm
Shipping volume:	0.24 m ³
Certification group:	IH920


ISO Certificates

ISO Standards:	ISO 9001; ISO 14001; ISO 45001; ISO 50001
----------------	--


Front

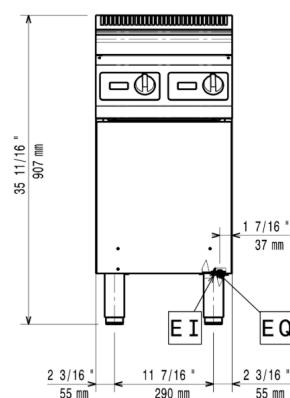

Side

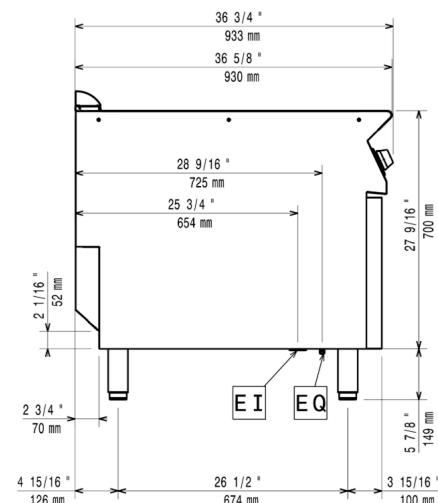

Top

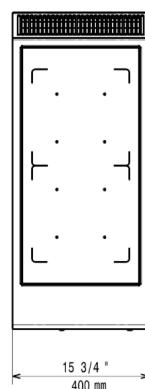

EI = Electrical inlet (power)

EQ = Equipotential screw



Find out more: ISO Certificates Electrolux Professional Recognitions

The company reserves the right to make modifications to the products without prior notice. All information is correct at the time of printing.

28/01/2026

3/3