

Warewashing NeoBlue Touch S Small Single Skin Glasswasher, rinse aid pump and detergent pump, tank filter, 40r/h, UK Plug

ITEM #	
MODEL #	
NAME #	
SIS #	
AIA #	



402189 (ETGWSG1U)

Undercounter Glasswasher (S), 400x400mm rack, electronic, single skin with pressure boiler, rinse aid+detergent pumps, drain pump, tank filters, 40 r/h, 1 phase, UK plug

Short Form Specification

Item No.

Under counter glass washer small, hot water sanitization type, suitable for up to $400*400\,\text{mm}$ racks.

Single skin cabinet. Double skin insulated, counter-balance door. Pressed wash tank with round corners. 304 AISI stainless steel construction to include door, external panels, frame, wash tank, tank filters, wash arms and rinse arms.

Electronic control with temperature display, to allow on-site customization. Four cycles of 90, 120, 180 and 540 sec. to wash different types of soiled wares. Automatic self-cleaning and draining cycle on board.

Washing performance is ensure by a powerful wash pump, large capacity wash tank, upper and lower revolving spray arms.

Rinse temperature guaranteed by built-in pressure boiler.

The unit shall include wash tank filters in composite material, drain pump and rinse aid dispenser pump.

Electrical characteristics to be 220-240 volts single phase operation. The unit is equipped with electrical cable and UK plug.

Main Features

- Maximum capacity of 40 racks per hour.
- Suitable to fit 400*400 mm racks.
- Simple operation control panel with digital display, led info lights; and color-coded main button to launch the washing cycles.
- Featured with n°4 washing cycle, 90 / 120 / 180 / 540 seconds, selectable by the display and customizable on site by service; to wash different kind of crockery.
- Built-in pressure boiler designed to raise incoming water to a guaranteed minimum temperature of 82° C for sanitizing rinse. No external boiler is required.
- Washing system endowed with rotating washing arms, high powered wash pump and large capacity wash tank for professional washing.
- Deep drawn pressed wash tank with fully rounded corners, sloped towards the drain to prevent dirt build up provides fast drainage in only a few minutes. Pressed wash tank with no welded points offer a guaranteed water tight solution.
- Equipped with electrical cable fitting schuko plug.
- Easy service access to all the main components from the front of the appliance, to fast on site operation.
- Built-in rinse aid and detergent dispenser with automatic chemicals loading, for perfect result while minimizing service and maintenance needs.
- Equipped with drain pump, to easily adjust the discharge height in case of wall plumbing; avoiding wastewater returns.
- Equipped with electrical cable fitting UK plug.

Construction

- Structure, panels, cavity and door in stainless steel to long lasting.
- Insulated double skin counter-balanced door construction for silent and smooth operation.
 Counter-balance mechanism minimizes impact when opening and closing.
- Completely closed on the back by a cover plate.
- Upper and lower screwed washing & rinsing arms and tank filters in composite material; are easy removable from the cavity to easy operation.
- Unit to feature rinse aid and detergent dispenser peristaltic pumps.

Sustainability



- Clear water consumption of 2 liter/rack, the water of the rinsing phase is recirculated to enable washing.
- Low noise level of 61 db during operations.
- Eco stand-by energy management function, to reduce power usage on inactive period.

APPROVAL:








Included Accessories		
 1 of Square basket for glasses 400x400x150mm 	PNC 864470	
• 1 of Insert for 12 saucers, 290X90x75mm	PNC 867048	
• 1 of Square cutlery container, 89x113x113mm	PNC 867049	
Optional Accessories		
 Kit wash tank filters in composite material (1 central support and 2 filters) for single skin NeoBlue (S) Glasswasher 	PNC 864496	
 Drain pump kit for single skin NeoBlue (S) Glasswasher 	PNC 864497	
 Square basket for glasses, 400x400x1100mm 	PNC 867039	
 Inclination insert for glasses, 400x180mm 	PNC 867044	
 Round basket for glasses, 400x180mm 	PNC 867047	
 Inclination insert for glasses 400x400 mm 	PNC 867069	
 Kit detergent dispenser for single skin NeoBlue (S) Glasswasher 	PNC 867085	
Recommended Detergents		
• C11 Detergent for dishwashers; one pack of 2 cans of 5lt.	PNC 0S2092	
• C13 ECO Detergent for dishwashers; one pack of 2cans of 5lt.	PNC 0S2093	
 C12 Rinse aid for dishwashers; one pack of 2 cans of 5lt. 	PNC 0S2094	
• C15 ECO Rinse aid for dishwashers; one pack of 2 cans of 5lt.	PNC 0S2904	



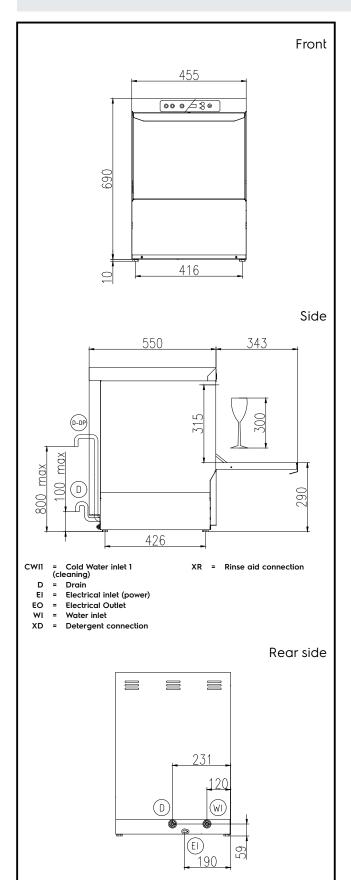

Electric

Supply voltage:220-240 V/1 ph/50 HzDefault Installed Power:2.7 kWBoiler heating elements:2.7 kWTank heating elements:2.4 kWWash pump size:0.2 kW

3/4"

Water:

Pressure, min-max: 2-5 bar
Water supply temperature*: 10-50 °C
Drain line size: 29mm
Washing tank capacity (It): 12
Water consumption per cycle (It): 0 / 2
Boiler Capacity (It): 3

Key Information:

Incoming water line size:

Wash temperature: 60°C Cell dimensions - width: 405 mm Cell dimensions - depth: 437 mm Cell dimensions - height: 315 mm Rinse temperature: 85 °C External dimensions, Width: 455 mm External dimensions, Depth: 550 mm External dimensions, Height: 700 mm Net weight: 38 kg Shipping weight: 43 kg Shipping height: 850 mm Shipping width: 540 mm Shipping depth: 630 mm 0.29 m³ Shipping volume:

 Baskets per hour*:
 40 / 30 / 20 / 6

 Working cycles time (sec.):
 90 / 120 / 180 / 540

 Dishes per hour:
 720 / 540 / 360 / 108

Sustainability

Noise level: 61 dBA

