



**Electrolux**

## Warewashing Small Pot & Pan Washer with Drain Pump & Detergent Dispenser

ITEM # \_\_\_\_\_

MODEL # \_\_\_\_\_

NAME # \_\_\_\_\_

SIS # \_\_\_\_\_

AIA # \_\_\_\_\_



**Electrolux**



Warewashing

Small Pot & Pan Washer with Drain Pump & Detergent Dispenser

**506048 (EPPWESG)** Electric pot&pan washer with electronic control, drain pump, detergent and rinse aid dispenser

**506049 (EPPWESG60)** \* NOT TRANSLATED \*

### Short Form Specification

**Item No.** \_\_\_\_\_

304 AISI stainless steel front and side panels, wash tank, tank filter and wash and rinse arms. Double skinned insulated door divided in 2 parts with 180° frontal opening. N. 4 washing cycles.

Built-in atmospheric, insulated water boiler (10,5 kW), 18-l

### Main Features

- Atmospheric insulated boiler combined with the rinse booster pump for perfect rinsing results (water temperature and pressure always constant during rinsing cycles), independent from the inlet water pressure.
- High efficiency air gap (class A) in water inlet circuit to avoid water being siphoned back into the network as a result of a sudden drop in main pressures.
- Open air gap in compliance with WRC regulations.
- 4 washing programs (one program is continual).
- Equipped with drain pump and built-in detergent dispenser for easy and quick installation without opening the machine.
- Easier access to the washing chamber thanks to the 180° frontal opening door.
- Requires limited space for opening thanks to the door divided in 2 sections.
- Self-cleaning cycle.
- Low noise level.
- Simple electronic control panel.
- Fault auto-diagnosis system.
- Simple service from the front.
- Green light of "WASH SAFE CONTROL" confirms that items have been rinsed properly. (only for 506049)

### Construction

- 304 stainless steel boiler with higher welding protection to increase resistance to corrosion.
- External connecting board protected by a waterproof plastic box.
- Unit to feature smooth surfaces to facilitate cleaning.
- Easy to remove pump and tank filters.
- Large strainer box above the water surface for frequent cleaning operations.
- Double skin insulated door to reduce heat dispersion.
- Equipped with side washing arms in addition to upper and lower wash arms.
- Pre-arranged to be connected to Energy Management device.
- Available upon request, pre-arranged model for HACCP implementation (both basic as well as integrated system).
- 304 AISI stainless steel front and side panels, wash tank, tank filter and wash and rinse arms.
- Unit to feature rinse aid dispenser pump.

**APPROVAL:** \_\_\_\_\_



**Electrolux**

## Warewashing Small Pot & Pan Washer with Drain Pump & Detergent Dispenser

### Included Accessories

- 1 of EXTRA RACK FOR CONTAINERS AND TRAYS PNC 864182
- 1 of S/S BASKET FOR POT WASHER,688 MM PNC 864191

### Optional Accessories

- Integrated HACCP kit PNC 864001
- HACCP printer kit PNC 864002
- Filter for partial demineralization PNC 864017
- Kit to measure total and partial water hardness PNC 864050
- EXTRA RACK FOR CONTAINERS AND TRAYS PNC 864182
- S/S BASKET FOR POT WASHER,688 MM PNC 864191
- Filter for total demineralization PNC 864367



**Warewashing  
Small Pot & Pan Washer with Drain Pump & Detergent Dispenser**

The company reserves the right to make modifications to the products without prior notice. All information correct at time of printing.


2014.06.23




Electrolux

# Warewashing Small Pot & Pan Washer with Drain Pump & Detergent Dispenser

Front

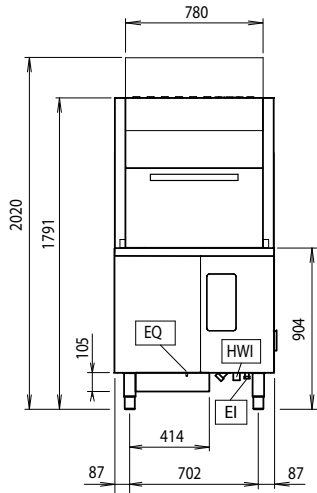


Top

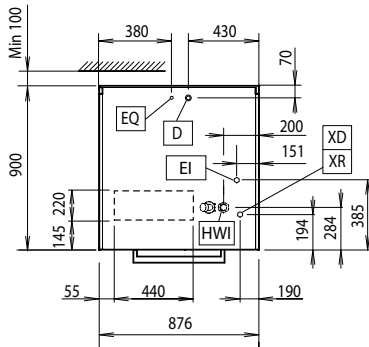

- D** = Drain
- EI** = Electrical connection
- EQ** = Equipotential screw
- HWI** = Hot water inlet
- V** = Air vents
- XD** = Detergent connection
- XR** = Rinse aid connection

Side

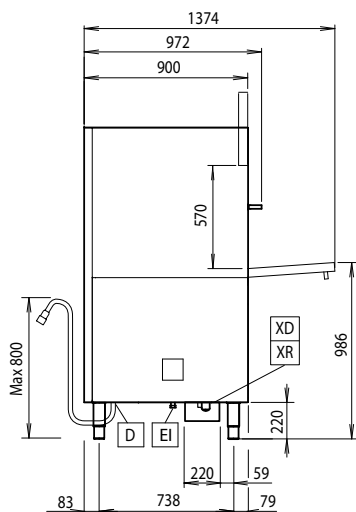

## Electric

### Supply voltage:

<b>506048 (EPPWESG)</b>	400 V/3N ph/50 Hz
<b>506049 (EPPWESG60)</b>	380-400V/3N ph/60 Hz

### Default Installed Power:\*

13 kW

### Connected load:

20 kW

## Water

**Pressure:** 0.5-7 bar

**Water supply temperature:** 50 °C

**Boiler Capacity (lt):** 18

**Inlet water supply hardness (MAX):**

**Washing cycle temperature:** 55-65 °C

**Washing cycle tank capacity (lt):** 95

**Washing cycle pump power:** 2.5 kW

**Washing cycle electrical elements:** 7 kW

**Hot rinse cycle duration (sec.):** 20

**Hot rinse cycle temperature:** 84 °C

## Key Information

**N° of working cycles - sec.:** 4 (180/360/540/inf)

**External dimensions, Height** 1791 mm

**External dimensions, Width** 876 mm

**External dimensions, Depth** 900 mm

**Net weight:** 200 kg

**Shipping weight:** 230 kg

**Shipping height:** 2030 mm

**Shipping width:** 1040 mm

**Shipping depth:** 1040 mm

**Shipping volume:** 2.2 m<sup>3</sup>

**Cell dimensions - width** 670 mm

**Cell dimensions - depth** 710 mm

**Cell dimensions - height** 570 mm

**Rinsing water consumption per cycle):** 7 lt

Warewashing  
Small Pot & Pan Washer with Drain Pump & Detergent Dispenser

The company reserves the right to make modifications to the products without prior notice. All information correct at time of printing.

