



**Electrolux**

Warewashing  
Large Pot & Pan Washer with  
Drain Pump & Detergent Dispenser

ITEM # \_\_\_\_\_

MODEL # \_\_\_\_\_

NAME # \_\_\_\_\_

SIS # \_\_\_\_\_

AIA # \_\_\_\_\_



Electrolux



Warewashing

Large Pot & Pan Washer with Drain Pump & Detergent Dispenser

**506054 (EPPWELG)**      Electric pot&pan washer with electronic control, drain pump, detergent and rinse aid dispenser

**506055 (EPPWELG60)**      \* NOT TRANSLATED \*

Short Form Specification

**Item No.** \_\_\_\_\_

304 AISI stainless steel front and side panels, wash tank, tank filter and wash and rinse arms. Double skinned insulated door divided in 2 parts with 180° frontal opening. N. 4 washing cycles.

Built-in atmospheric, insulated water boiler (10,5 kW), 18-l

Main Features

- Atmospheric insulated boiler combined with the rinse booster pump for perfect rinsing results (water temperature and pressure always constant during rinsing cycles), independent from the inlet water pressure.
- Green light of "WASH SAFE CONTROL" confirms that items have been rinsed properly.
- High efficiency air gap (class A) in water inlet circuit to avoid water being siphoned back into the network as a result of a sudden drop in main pressures.
- Open air gap in compliance with WRC regulations.
- 4 washing programs (one program is continual).
- Equipped with drain pump and built-in detergent dispenser for easy and quick installation without opening the machine.
- Easier access to the washing chamber thanks to the 180° frontal opening door.
- Requires limited space for opening thanks to the door divided in 2 sections.
- Self-cleaning cycle.
- Low noise level.
- Simple electronic control panel.
- Fault auto-diagnosis system.
- Simple service from the front.

Construction

- 304 stainless steel boiler with higher welding protection to increase resistance to corrosion.
- Only one cable for electrical connection.
- External connecting board protected by a waterproof plastic box.
- Unit to feature smooth surfaces to facilitate cleaning.
- Easy to remove pump and tank filters.
- Large strainer box above the water surface for frequent cleaning operations.
- Finished in top quality materials to ensure durability.
- Double skin insulated door to reduce heat dispersion.
- Equipped with side washing arms in addition to upper and lower wash arms.
- Pre-arranged to be connected to Energy Management device.
- Available upon request, pre-arranged model for HACCP implementation (both basic as well as integrated system).
- 304 AISI stainless steel front and side panels, wash tank, tank filter and wash and rinse arms.
- Unit to feature rinse aid dispenser pump.

APPROVAL: \_\_\_\_\_



**Electrolux**

## Warewashing Large Pot & Pan Washer with Drain Pump & Detergent Dispenser

### Included Accessories

- 2 of EXTRA RACK FOR CONTAINERS AND TRAYS PNC 864182
- 1 of S/S BASKET FOR POT WASHER,1351 MM PNC 864192

### Optional Accessories

- Integrated HACCP kit PNC 864001
- HACCP printer kit PNC 864002
- Filter for partial demineralization PNC 864017
- Kit to measure total and partial water hardness PNC 864050
- EXTRA RACK FOR CONTAINERS AND TRAYS PNC 864182
- S/S BASKET FOR POT WASHER,1351 MM PNC 864192
- Filter for total demineralization PNC 864367



**Warewashing  
Large Pot & Pan Washer with Drain Pump & Detergent Dispenser**

The company reserves the right to make modifications to the products without prior notice. All information correct at time of printing.


2014.06.23




Electrolux

# Warewashing Large Pot & Pan Washer with Drain Pump & Detergent Dispenser

Front

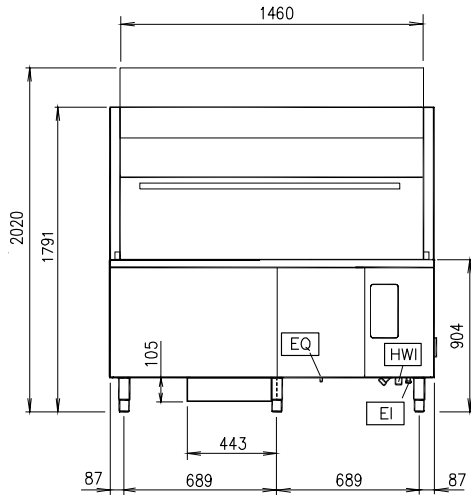


Top

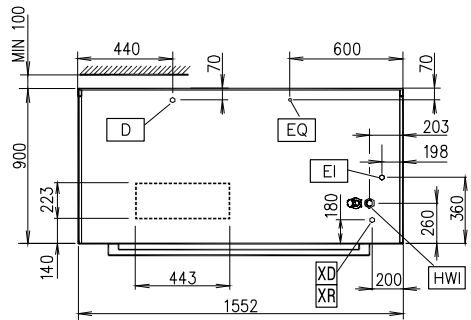

- D** = Drain
- EI** = Electrical connection
- EQ** = Equipotential screw
- HWI** = Hot water inlet
- V** = Air vents
- XD** = Detergent connection
- XR** = Rinse aid connection

Side

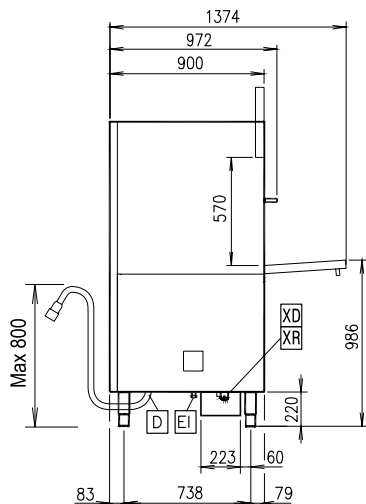

## Electric

### Supply voltage:

<b>506054 (EPPWELG)</b>	400 V/3N ph/50 Hz
<b>506055 (EPPWELG60)</b>	380-400V/3N ph/60 Hz

### Default Installed Power:\*

17 kW

### Connected load:

26 kW

## Water

### Pressure:

0.5-7 bar

### Water supply temperature:

50 °C

### Boiler Capacity (lt):

18

### Inlet water supply hardness (MAX):

### Washing cycle temperature:

55-65 °C

### Washing cycle tank capacity (lt):

150

### Washing cycle pump power:

5 kW

### Washing cycle electrical elements:

10,5 kW

### Hot rinse cycle duration (sec.):

20

### Hot rinse cycle temperature:

84 °C

## Key Information

### N° of working cycles - sec.:

4 (180/360/540/inf)

### External dimensions, Height

1791 mm

### External dimensions, Width

1552 mm

### External dimensions, Depth

900 mm

### Net weight:

300 kg

### Shipping weight:

340 kg

### Shipping height:

<b>506054 (EPPWELG)</b>	2030 mm
<b>506055 (EPPWELG60)</b>	2200 mm

### Shipping width:

<b>506054 (EPPWELG)</b>	1100 mm
<b>506055 (EPPWELG60)</b>	1800 mm

### Shipping depth:

<b>506054 (EPPWELG)</b>	1800 mm
<b>506055 (EPPWELG60)</b>	1100 mm

### Shipping volume:

<b>506054 (EPPWELG)</b>	4.02 m <sup>3</sup>
<b>506055 (EPPWELG60)</b>	4.36 m <sup>3</sup>

### Cell dimensions - width

1340 mm

### Cell dimensions - depth

710 mm

### Cell dimensions - height

570 mm

### Rinsing water consumption per cycle):

12 lt



## Warewashing Large Pot & Pan Washer with Drain Pump & Detergent Dispenser

The company reserves the right to make modifications to the products without prior notice. All information correct at time of printing.