

**Frozen  
 Frozen granita dispenser with 2 bowls,  
 mechanical control with UK Plug and UV  
 light**

ITEM # \_\_\_\_\_

MODEL # \_\_\_\_\_

NAME # \_\_\_\_\_

SIS # \_\_\_\_\_

AIA # \_\_\_\_\_


**560120 (IPRO2MUK)**

 Frozen Granita Dispenser  
 with 2X11 l insulated bowls,  
 UV light, mechanical control  
 - UK plug

### Short Form Specification

**Item No.** \_\_\_\_\_

Frozen granita dispenser with 2 bowls; the ITANK™ Technology prevents ice accumulation on the outer side of the bowl and the bowl shape allows a natural mixing action to ensure an optimum consistency of the product. Customizable lid merchandiser and back graphic. Mechanical keypad allows for setting of cooling and defrost modes. Exclusive nUV LED system for bowl sanitation. Electromechanical control. Sliding drip tray. Delivered with UK plug.

### Main Features


- The ITANK™ Technology prevents ice accumulation on the outer side of the bowl, reducing condensation and increasing the cooling power of the machine.
- Bowl shape allows a natural mixing action to ensure an optimum consistency of the product.
- Customizable lid merchandiser and back graphic.
- Ideal for operators who want an innovative and distinctive equipment. Mechanical keypad allows for setting of cooling and defrost modes.
- The insulated tank guarantees higher cooling efficiency and lower effect of the external temperature on product's preparation and maintenance time reducing condense and draining; it is the best solution in hot climate conditions.
- Exclusive nUV LED system for bowl sanitation.

### Construction


- Electromechanical control.
- Sliding drip tray.

**APPROVAL:** \_\_\_\_\_


Front

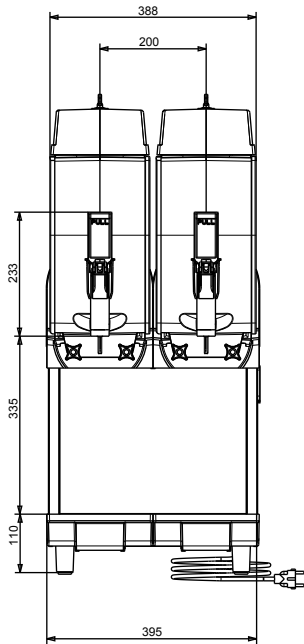

Side

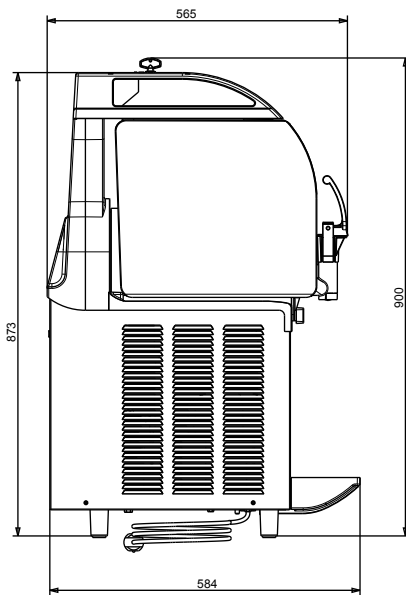

Top

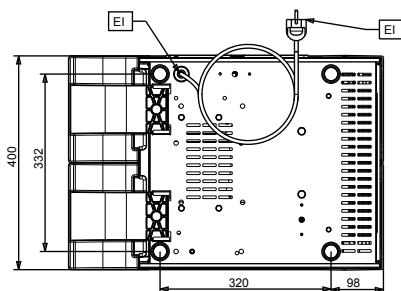
**Electric**
**Supply voltage:**

560120 (IPRO2MUK) 220-240 V/1 ph/50 Hz

**Electrical power max.:**

0.98 kW

**Key Information:**
**External dimensions, Width:** 400 mm

**External dimensions, Depth:** 580 mm

**External dimensions, Height:** 870 mm

**Net weight:** 60 kg

**Refrigeration Data**
**Refrigerant type:** R452A