

Hand held Mixers

Bermixer Pro Turbo 650 W with Stainless Steel Tube - UK Plug

ITEM # _____

MODEL # _____

NAME # _____

SIS # _____

AIA # _____



600386 (BP6565G)

Portable Mixer, variable speed up to 10000 rpm, with stainless steel tube 653 mm, 650W - UK

Main Features

- Parts in contact with food - tube, blade, shaft - can be completely dismantled without tools for easy cleaning.
- Designed to be used directly in stew pots up to 240 lt.
- Delivered with:
 - flat base motor
 - stainless steel tube
 - space saving storing wall support
- Light weight, ergonomic grip and adjustable speeds make preparation tasks fast and easy.
- Anti-splash bell knife design.
- Bayonet system makes fast and simple to exchange tools.
- Overheating warning red indicator.
- Tube, knife and whisks are dishwasher safe.
- Safety feature requires both hands to start the mixer (no volt release system).
- Productivity suitable for 50 to 300 meals per service.

Construction

- Power: 650 watts.
- Maximum speed 10000 rpm.
- Motor has an air cooling system and is protected against overheating (in case of long intensive work).
- Smart speed control to ensure the right power according to the work load.
- Water protected motor unit (controls are IP55, IP34 throughout machine).

Included Accessories

- 1 of 653 mm stainless steel tube for Bermixer (for 650W, 750W) PNC 650135

Optional Accessories


- Reinforced whisk for portable Bermixer PNC 650108
- 353 mm stainless steel tube for portable mixer bermixer PNC 650132
- 453 mm stainless steel tube for portable mixer bermixer PNC 650133
- 553 mm stainless steel tube for Bermixer (for 450W, 550W, 650W, 750W) PNC 650134
- 653 mm stainless steel tube for Bermixer (for 650W, 750W) PNC 650135
- Adjustable rail for containers diam. 375 mm to 650 mm (to be used with 653294) PNC 653292
- Holder to support portable mixer in containers (can be used only with tube attachment) PNC 653294

APPROVAL: _____

Front




Side

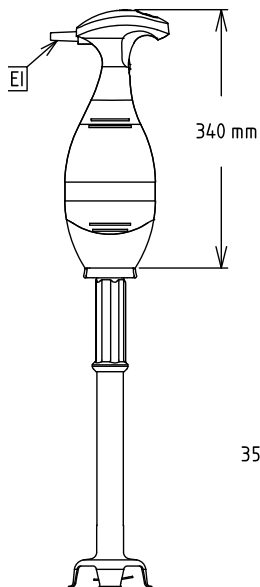

EI = Electrical inlet (power)

Top

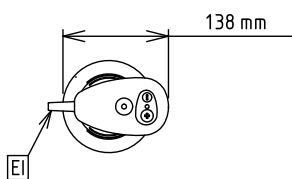

Electric

Supply voltage:

600386 (BP6565G) 220-240 V/1 ph/50/60 Hz

Electrical power max.: 0.65 kW

Total Watts: 0.65 kW

Capacity:

Capacity (up to): 240 litres

Key Information:

External dimensions, Width: 138 mm

External dimensions, Depth: 120 mm

External dimensions, Height: 965 mm

Shipping weight: 5 kg