



**Electrolux**  
PROFESSIONAL

## Food slicers 300 mm Gravity Slicer, gear transmission

ITEM # \_\_\_\_\_

MODEL # \_\_\_\_\_

NAME # \_\_\_\_\_

SIS # \_\_\_\_\_

AIA # \_\_\_\_\_



601134 (MSG30G)

Gravity Slicer 300mm, gear  
transmission (230V; 1+N; 50)

### Short Form Specification

Item No. \_\_\_\_\_

Heavy duty slicer for supermarkets and delis  
Base and main components in high polished satin finished  
anodized aluminium for long lasting, hygiene and ease of  
cleaning. The blade is in hollow ground hard chrome with blade  
guard ring for added protection. Model equipped with cut  
thickness adjusting knob, top mounted sharpener, cover blade  
and product deflector - easily removable for cleaning. Ventilated  
blade drive motor. Gear drive system for continuous daily use.  
Removable carriage system permanently lubricated with  
automatic clutch. IP42 water protection.  
Supplied with blade removal tool.

### Main Features

- Manual gravity slicer.
- Slice thickness from 0 to 24 mm.
- Cut thickness-adjusting knob (millimeter adjustment).
- Gear driven transmission permanently oil-lubricated.
- Ventilated blade drive motor designed for continuous use, with gear drive system for heavy and continuous daily operations.
- Removable carriage system permanently lubricated with automatic clutch.
- Top-mounted stone blade sharpener and cover blade easy to remove.
- Supplied with blade removal tool.
- Highest degree of safety in functioning, cleaning and maintenance.
- Cutting capacity for 300 model:
  - square: 185x185
  - rectangular: 255x165
  - round: 210

### Construction

- Compact design.
- Made in high polished satin finished anodized aluminium. This procedure guarantees high hygienic standards of the parts interested by the cut and resistance to acids, salts and oxidation processes.
- The blade is made of hollow ground hard chrome with blade guard ring for added protection.
- Plexiglass safety hand guard as standard.
- IP42 water protection.

APPROVAL: \_\_\_\_\_



Experience the Excellence  
[www.electroluxprofessional.com](http://www.electroluxprofessional.com)

**Electric**

Supply voltage:

601134 (MSG30G)

230 V/1N ph/50 Hz

Total Watts:

0.5 kW



**Key Information:**

External dimensions, Width: 720 mm

External dimensions, Depth: 520 mm

External dimensions, Height: 520 mm

Net weight (kg): 36

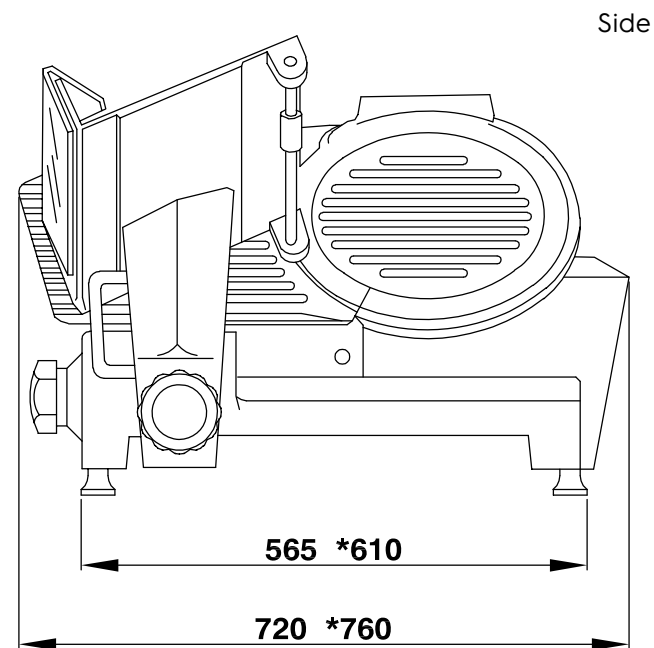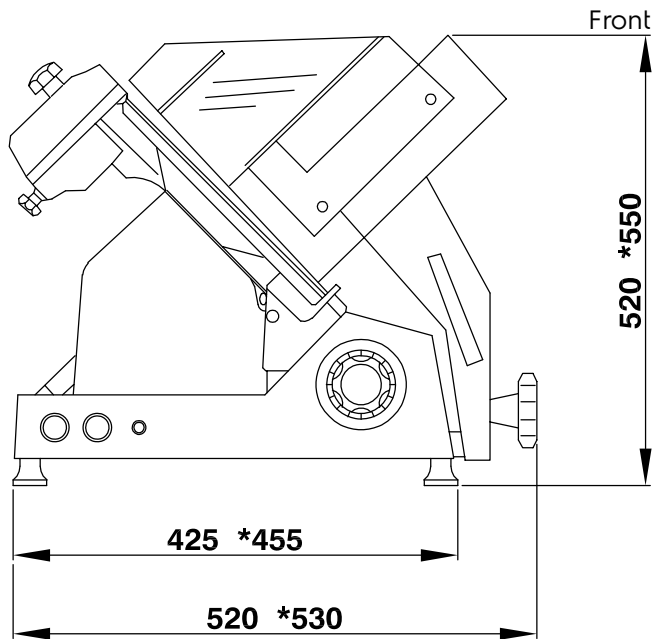

EI = Electrical inlet (power)