

Datasheets

UltraVent Plus - Type XS 6-2/3 E



Articlenumber

60.74.394

Description

The UltraVent Plus gets rid of the steam emitted with its condensation technology. No connection to the outside or extension of an existing exhaust system is necessary with this air recirculation hood. Installation is simple, and the hood can be retrofitted at any time.

It is also equipped with special filter technology which reduces lingering smoke, which can build up while grilling and frying.

Intended use

This product is intended exclusively for professional use, such as in restaurant kitchens or catering operations for schools, hospitals, or delis. Any other use runs counter to its intended purpose, and could be dangerous. RATIONAL AG assumes no liability for consequences of improper use.

Features

- Special filter technology with a replaceable HEPA H11 main filter to reduce smoke
- Reliably reduces escaping steam and vapours thanks to the high extraction rate
- Easy to clean baffle plate, dishwasher safe
- Automatically boosts extraction rate when cooking cabinet door is opened

Technical specifications

Connection:	200-240 V - 1 NAC
Frequency:	50/60 Hz
Connected load:	140-160 W
Extraction capacity:	280-560 m ³ /h
Operating noise level:	52-67 dB(A)

Dimensions and weights

Width (W):	657 mm
Height (H):	339 mm
Depth (D):	583 mm
Weight:	38 kg

Material

Rust-free stainless steel (CNS 1.4301/AISI 304)

Note

- The local standards and regulations for ventilation systems must be adhered to
- The condensation hood can be used for right-sided units as well as for left-sided units. An installation option for both variants is included in the scope of delivery.
- Not to be used with VarioSmoker
- We recommend maintaining an overhead clearance of at least 450 mm for all cooking systems and Combi-Duos using an UltraVent or an UltraVent Plus
- In individual cases involving Model 10-1/1 or smaller tabletop cooking systems, this clearance can be reduced to a minimum of 250 mm following expert evaluation of local framework conditions
- To install an UltraVent or UltraVent Plus on a iCombi Pro XS (from 04/2023) a corresponding adapter kit is required

Datasheets

UltraVent Plus - Type XS 6-2/3 E




Approvals




Datasheets
UltraVent Plus - Type XS 6-2/3 E




Vorderansicht
 Front view
 Vue de face

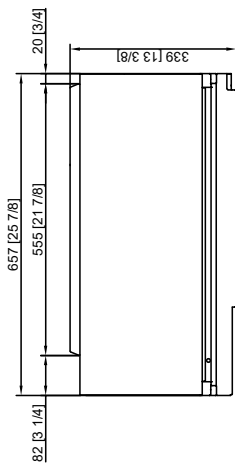


Seitenansicht
 Side view
 Vue de côté

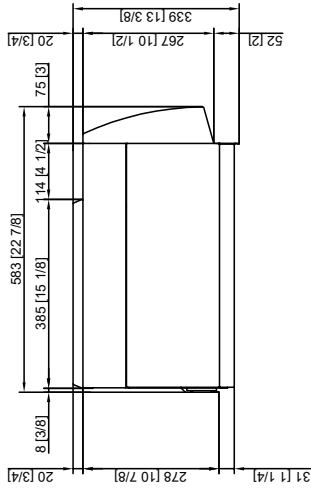

Rückansicht
 Back view
 Vue arrière

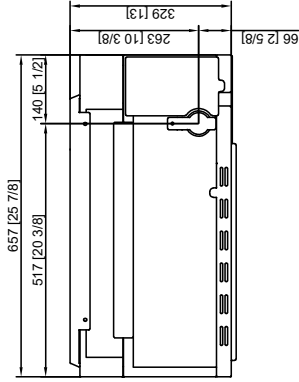

Draufsicht
 Top view
 Vue de dessus

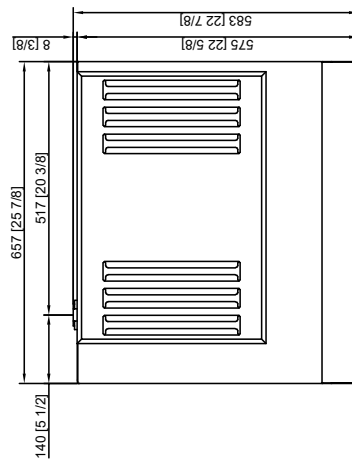

Informations/Informations/Informations		Beschreibung/Description/description	
Zeichnungsdruck unterliegt nicht dem Urheberrecht Printed drawing is not automatically updated! La mise à jour n'est pas assurée sur les plans papier!		UltraVent Plus (CP-CP) XS 6-2/3	
RATIONAL AG 2019		RATIONAL AG 2019	
Date/Date/Date		Date/Date/Date	
Name/Name/Name		Name/Name/Name	
No./No./No.		No./No./No.	
1		1	
2		2	
3		3	
4		4	
5		5	
6		6	
7		7	
8		8	