

400 Line 400lt Line Freezer 1 Door - Stainless steel, UK Plug (R290)

ITEM # _____

MODEL # _____

NAME # _____

SIS # _____

AIA # _____


727859 (R04FSF43)

 1-door Freezer 400lt, -15-24°
 C (R290), stainless steel with
 wheels, UK plug

727860 (R04FSF4S)

 1-door Freezer 400lt, -15-24°
 C (R290), stainless steel with
 wheels, left hinged, UK plug

Short Form Specification

Item No. _____

Exterior in stainless steel. Interior in white High Impact Polystyrene with rounded corners and 45mm thick insulation. Right hinged full door with lock and heated frame, reversible on-site. Built-in refrigeration unit; manual defrost; digital control and temperature display; multiple evaporating grids. For ambient temperatures up to 38 °C. HCFC, CFC and HFC free insulation and R290 refrigerant gas. With 2 front feet and 2 back wheels. Supplied with n. 4 evaporating grids.

Main Features

- Digital control panel allowing the easy and precise setting and control of the internal temperature.
- Shelf runners are thermoformed and are incorporated in the internal structure to be easily cleanable.
- Whole interior cell with rounded corners is white thermoformed polystyrene, which is impact resistant.
- Model requires only 1 phase 230V supply and can be plugged straight into an existing power socket.
- Very quiet operation.
- No joints whatsoever to eliminate dirt traps.
- Simple refrigeration system easily accessible from the rear of the units.
- Suitable for use in ambient temperatures of up to 38 °C.
- CFC and HCFC free (highly ecological refrigerant type: R290).
- Connectivity ready for real time access to connected appliances from remote and data monitoring (requires optional accessory).

Construction

- Developed and produced in ISO 9001 and ISO 14001 certified factory.
- All models in range are finished in top quality materials to aid durability.
- Mounted on wheels.
- Delivered with UK plug.

Included Accessories


- 1 of Pair of grids for 400lt refrigerator, white (only for 727860) PNC 880292

Optional Accessories


- Pair of grids for 400lt refrigerator, white PNC 880292
- Kit of wheels for 400lt refrigerators PNC 880348
- Pvc container with false bottom for 400lt PNC 881072

APPROVAL: _____

Front

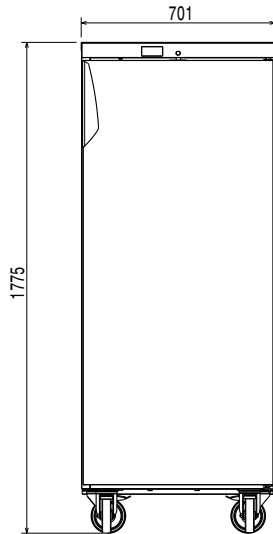


Side

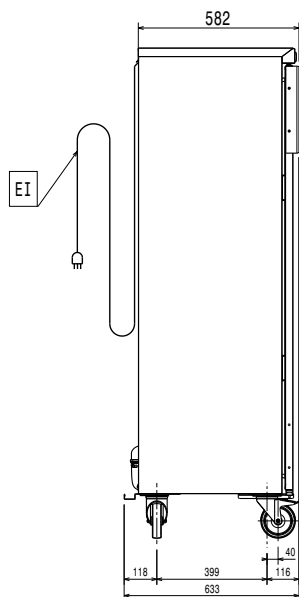

EI = Electrical inlet (power)

Top

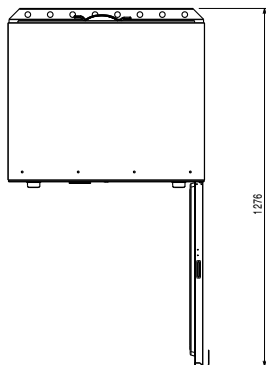
Electric
Supply voltage:

727859 (R04FSF43) 220-240 V/1 ph/50 Hz

727860 (R04FSF4S) 220-240 V/1 ph/50 Hz

Electrical power max.: 0.37 kW

Key Information:
Gross capacity: 400 lt

Net Volume:
N° of doors: 1

Door hinges:

727859 (R04FSF43) Right Side

727860 (R04FSF4S) Left Side

External dimensions, Width: 700 mm

External dimensions, Depth: 620 mm

External dimensions, Depth with Doors Open: 1310 mm

External dimensions, Height: 1775 mm

Noise level: 56 dBA

Number and type of grids (included):
Type of external material: Stainless Steel

Type of internal material: Polystyrene

External side panels: Stainless Steel

External top panels: Stainless Steel

External door material: Stainless Steel

Internal panels material: Polystyrene

Internal side panels material: Polystyrene

Refrigeration Data
Control type: Digital

Compressor power: 3/4 hp

Refrigerant type: R290

Refrigeration power: 644 W

Refrigeration power at evaporation temperature: -23.3 °C

Refrigerant weight: 110 g

Min/Max internal humidity:
Operating temperature min.: -24 °C

Operating temperature max.: -15 °C

Operating mode: Static

Cooling unit: Built-In

Defrost type: Manual