

## Digital Undercounter ecostore HP Refrigerated Counter- 4 Door (R290) with top and wheels, UK plug

ITEM # \_\_\_\_\_

MODEL # \_\_\_\_\_

NAME # \_\_\_\_\_

SIS # \_\_\_\_\_

AIA # \_\_\_\_\_



710452 (EJ4HBAAAAG)

4-door Refrigerated  
Counter, -2+10°C, AISI 304  
(R290), with wheels - UK  
plug

### Short Form Specification

#### Item No.

AISI 304 stainless steel panels, AISI 430 bottom panel, galvanized back panel. Worktop thickness 50mm. N. 4 full doors. Built-in refrigeration unit. Operating temperature: -2+10°C. R290 gas in refrigeration circuit. Supplied with 1 grid for each door compartment

### Main Features

- Digital control panel allowing the easy and precise setting and control of the internal temperature.
- Operating temperature can be adjusted from -2 to +10 °C to suit different food storage requirements.
- Complies with main international certification bodies and is CE marked.
- Kit 1/2 drawers available as accessory.
- Completely automatic defrosting and automatic evaporation of defrost water by hot gas.
- Forced air cooling system guaranteeing great uniformity of the temperature in the counter and excellent conservation of the food quality.
- Kit 1/3 drawers available as accessory.
- Connectivity ready for real time access to connected appliances from remote and data monitoring (requires optional accessory).
- Easy serviceability thanks to the intuitive control panel with access via app.
- Integrated RS485 port to facilitate connection to a remote computer and integrated HACCP systems.
- Tropicalized unit.

### Construction

- Built-in compressor to suit operating conditions.
- Legs in 304 AISI stainless steel (150 mm high, adjustable in height), with plastic interior.
- Back panel in galvanized steel.
- The door self-closes when opened less than at a 90° angle and is equipped with a door seal to guarantee perfect closure.
- High standards of hygiene and ease of cleaning are guaranteed by the rounded internal corners of the cabinet and easily removable runners and grids.

### Included Accessories

- 4 of Kit 1/1 grey rilsan grid and 2 side runners for refrigerated counters PNC 881109

### Optional Accessories

- 1/1GN grey rilsan grid for refrigerated counters PNC 881107 ☐
- 2 side runners for 1/1 GN ecostore refrigerated counters PNC 881108 ☐
- Kit 1/1 grey rilsan grid and 2 side runners for refrigerated counters PNC 881109 ☐
- 1/1 GN plastic container, H=65 mm PNC 881110 ☐
- 1/1 GN plastic container, H=100 mm PNC 881111 ☐
- 1/1 GN plastic container, H=150 mm PNC 881112 ☐
- 2x½ drawer kit for refrigerated counters - h650mm PNC 881176 ☐
- 3x1/3 drawer kit for refrigerated counters - h650mm (only for refrigerated counters) PNC 881177 ☐

APPROVAL: \_\_\_\_\_



**Electrolux**  
PROFESSIONAL


**Digital Undercounter  
ecostore HP Refrigerated Counter- 4  
Door (R290) with top and wheels, UK plug**

- 1/3 and 2/3 bottle drawer kit for refrigerated counters - h650mm (only for refrigerated counters) PNC 881178 ☐
- Kit 5 wheels, H=100 mm (3 with brakes) for 4 compartment refrigerated counters PNC 881192 ☐
- Kit 5 wheels, H=150 mm (2 with brakes) for 4 compartment refrigerated counters PNC 881194 ☐
- Lock for refrigerator/freezer counters with 4 compartments - h650mm (can be used in kit for Marine conversion) PNC 881247 ☐
- Kit 4 (45mm) spacers for wheels for refrigerator/freezer counters PNC 881277 ☐



**Digital Undercounter  
ecostore HP Refrigerated Counter- 4 Door (R290) with top and wheels,  
UK plug**  
The company reserves the right to make modifications to the products  
without prior notice. All information correct at time of printing.

2025.03.17

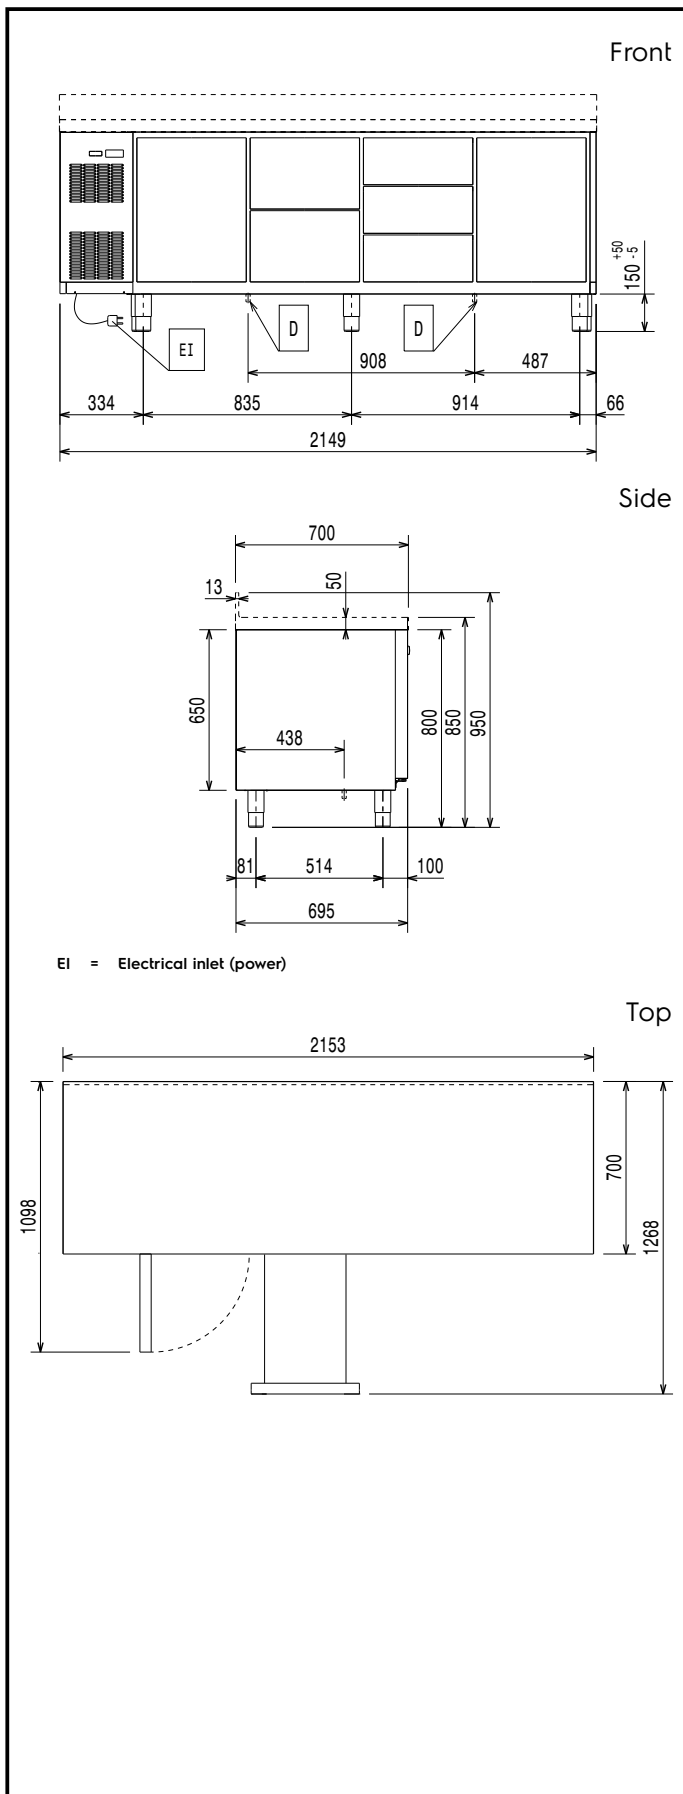

### Electric

Supply voltage: 220-240 V/1 ph/50 Hz  
 Electrical power max.: 0.27 kW

### Key Information:

Net Volume: 327.2 lt  
 N° of doors: 4  
 External dimensions, Width: 2153 mm  
 External dimensions, Depth: 700 mm  
 External dimensions, Height: 850 mm  
 Internal Dimensions, Width: 1706 mm  
 Internal Dimensions, Depth: 560 mm  
 Internal Dimensions, Height: 510 mm  
 Net weight: 134 kg  
 Shipping volume: 1.78 m³  
 Depth with doors open: 1310 mm  
 Gross capacity:

### Refrigeration Data

Control type: Digital  
 Min/Max internal humidity: 40/85  
 Operating temperature min.: -2 °C  
 Operating temperature max.: 10 °C  
 Compressor power: 1/4 hp  
 Operating mode: Ventilated  
 Insulation: 90 mm (Cyclopentane)

### ISO Certificates

ISO Standards: ISO 9001; ISO 14001; ISO 45001; ISO 50001

### Sustainability

Refrigerant type: R290  
 GWP Index: 3  
 Refrigeration power: 395 W  
 Refrigerant weight: 65 g  
 Energy Class (EU Reg. 2015/1094): B  
 Yearly and daily energy consumption (EU Reg. 2015/1094): 810kWh/year - 2kWh/24h  
 Climate class (EU Reg. 2015/1094): Heavy Duty (5)  
 Energy Efficiency Index-EEI (EU Reg. 2015/1094): 30,85



**Electrolux**  
PROFESSIONAL

**Digital Undercounter  
ecostore HP Refrigerated Counter- 4  
Door (R290) with top and wheels, UK plug**



**EU energy labelling from 1st July 2016**

The European energy labelling scheme for professional refrigerators and freezers is based on requirements setting Minimum Energy Performance standards for commercial refrigeration cabinets sold within the EU.

These requirements are designed to drive energy efficiency and environmentally friendly approach for professionals. The European energy labelling scheme will apply to all manufacturers and importers who sell and market products within the EU and it is mandatory across Europe. Important: all products which consume energy above the minimum level will not be able to be sold within the EU from 1 July 2016.

SI 2020 No. 1528.

Important: all products which consume energy above the minimum level will not be able to be sold within the EU from 1 July 2016.

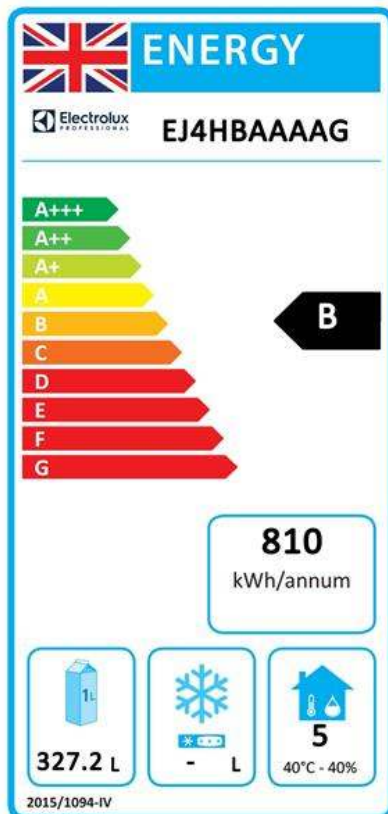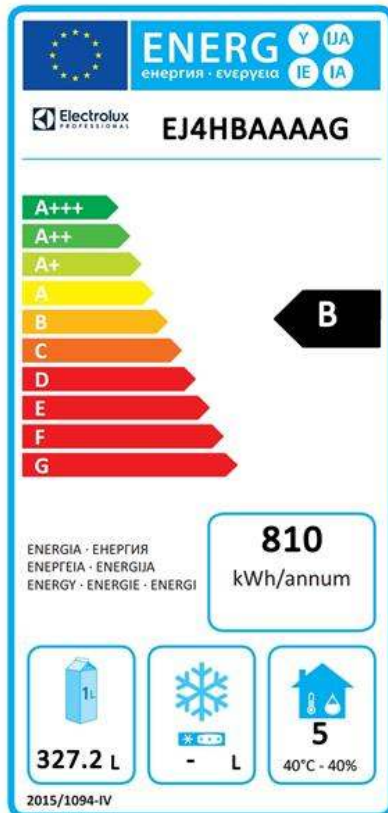

**Digital Undercounter  
ecostore HP Refrigerated Counter- 4 Door (R290) with top and wheels,  
UK plug**  
The company reserves the right to make modifications to the products without prior notice. All information correct at time of printing.

2025.03.17