



Digital Undercounter Refrigerated Counter Saladette - 290lt, 2 Door

ITEM # _____
MODEL # _____
NAME # _____
SIS # _____
AIA # _____



Digital Undercounter

Refrigerated Counter Saladette - 290lt, 2 Door

726591 (RCDR2M20H)

2-door refrigerated counter,
saladette with cut-out for
containers, -2+10°C, 290lt,
AISI 304

Short Form Specification

Item No.

External and internal in AISI 304 stainless steel. Worktop, thickness mm50, fitted with cut-out for n. 3 GN 1/3 containers (not included) and stainless steel lid. Insulation thickness mm60. N. 2 full doors. Built-in refrigeration unit. Ventilated operating mode. Evaporator. Electronic microprocessor control with external digital temperature display. Automatic defrost. Operating temperature: -2+10°C. For ambient temperatures up to 43 °C. CFC and HCFC free. R134a gas in refrigeration circuit. Gas in foam: Cyclopentane.

Supplied with n. 2X1/IGN Rilsan coated grids and n. 8 sets of 2 stainless steel grid runners.

Main Features

- Adjustable temperature range from -2 °C to +10 °C to suit meat, fish and dairy storage requirements.
- Anti-tilt runners accept GN 1/1 containers.
- Electronic microprocessor control with external digital temperature display.
- Forced air circulation for rapid cooling and an even temperature distribution.
- 60 mm insulation for energy saving.
- Cut-out worktop suitable for 3 GN 1/3 trays.
- Stainless steel lid for non-operating periods.

Construction

- Developed and produced in ISO 9001 and ISO 14001 certified factory.
- CFC and HCFC free (ecological refrigerant type: R134a, - gas in foam: cyclopentane).
- Built-in compressor to suit operating conditions.
- Constructed from AISI 304 Stainless steel throughout to meet the highest hygiene standards.
- Rounded internal corners for ease of cleaning.
- Mounted on Stainless steel legs to give 150 mm clearance for ease of cleaning the floor.
- Worktop in AISI 304 Stainless steel with a 50 mm profile.
- Access to all components from the front.

Included Accessories

- 2 of 1/IGN grey rilsan grid PNC 881435

Optional Accessories

- 2 wheels for HD refrigerated counter PNC 880539 and 400, 600 & 1300lt benefit refrigerated cabinets
- 1/IGN grey rilsan grid PNC 881435
- Printer for HACCP basic version (for cabinets and counters with digital control) PNC 881457
- Lock for refrigerated counters PNC 881499

APPROVAL:




Refrigerated Counter Saladette - 290lt, 2 Door

Digital Undercounter
Refrigerated Counter Saladette - 290lt, 2 Door



Electrolux

Digital Undercounter Refrigerated Counter Saladette - 290lt, 2 Door

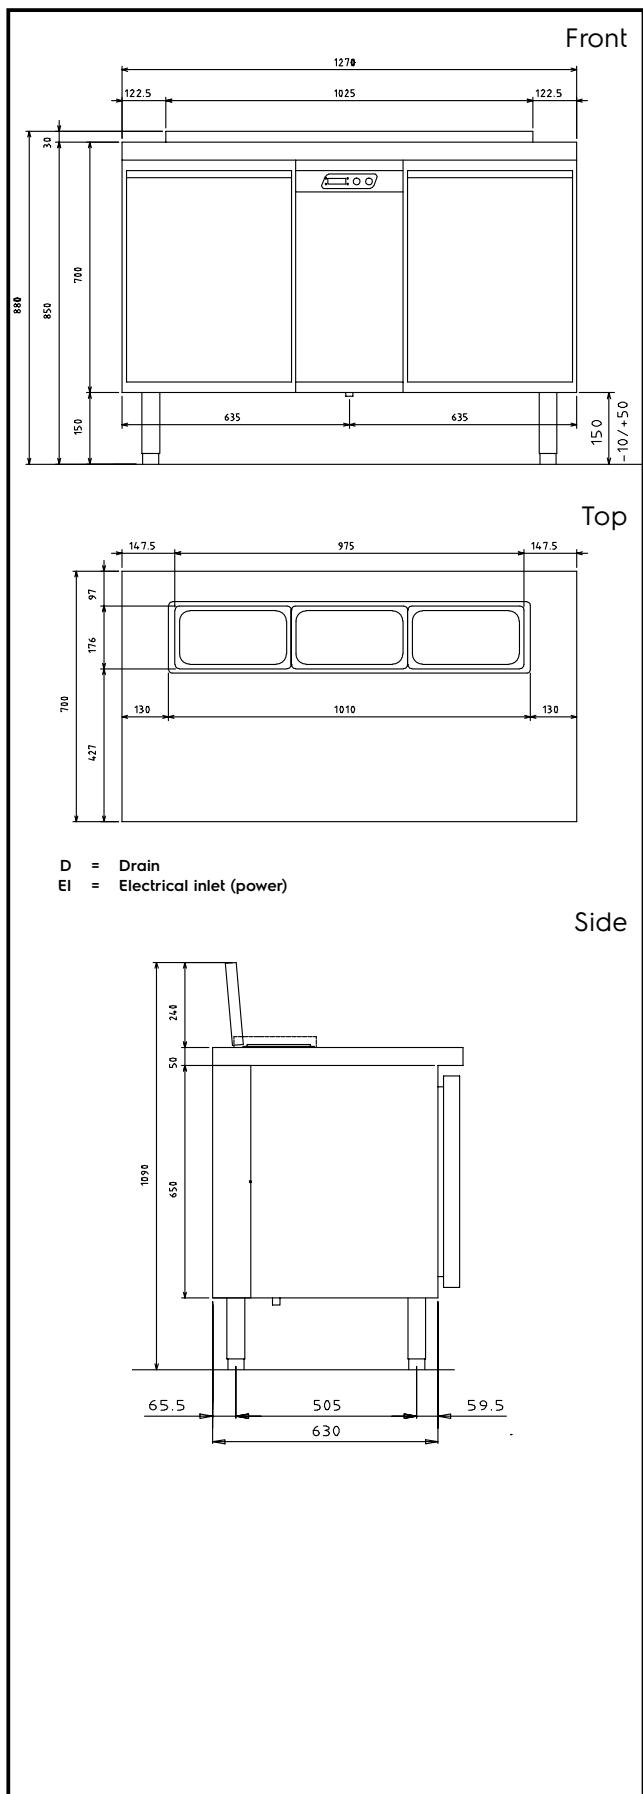

Electric

Supply voltage: 726591 (RCDR2M20H) 230 V/1N ph/50 Hz

Key Information:

Gross capacity:	290 lt
Net Volume:	
Door hinges:	1 Left+1 Right
Built-in Compressor and Refrigeration Unit	
External dimensions, Height:	850 mm
External dimensions, Width:	1274 mm
External dimensions, Depth:	700 mm
Number and type of doors:	2
Depth with doors open:	1110 mm
Height adjustment:	-10/50 mm
Number and type of grids (included):	2 - GN 1/1

Refrigeration Data

Compressor power:	1/4 hp
Refrigerant type:	R134a
Refrigeration power:	358 W
Refrigerant weight:	220 g

Product Information (EU Regulation 2015/1094)

Energy Class:

Yearly energy consumption:

Climate class:

Energy Efficiency Index (EEI): 45,63

Digital Undercounter
Refrigerated Counter Saladette - 290lt, 2 Door

The company reserves the right to make modifications to the products without prior notice. All information correct at time of printing.

2017.04.03