


Hood Type Dishwasher With Drain Heat Recovery Unit

AMXRW-10B

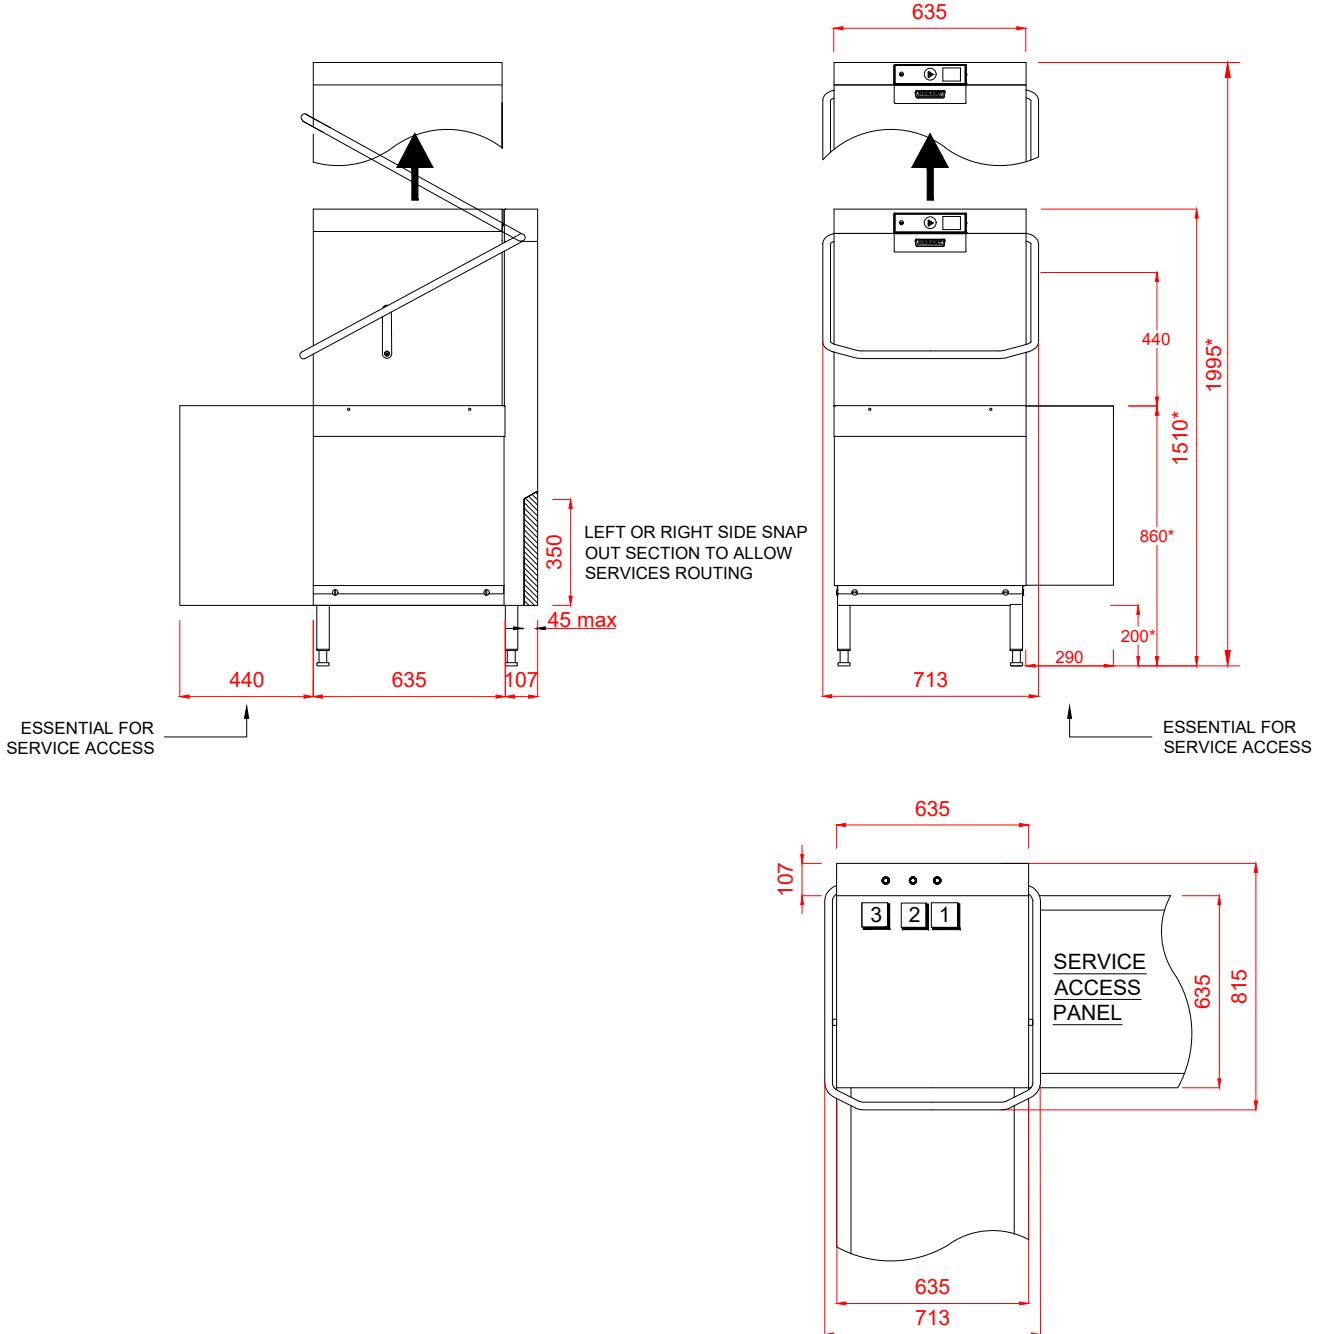

1 Water

22mm CONNECTION VIA 2 METRE FLEXIBLE HOSE,
FEMALE TERMINATION.

WATER SUPPLY **MAX 15°C** (2° TO 8° CLARK MAX)
@ 0.5 TO 10.0 BAR MAX. INITIAL TANK FILL 23 LITRES.

RINSE WATER USAGE 2.0 LITRES PER CYCLE.
MAX USAGE 120 LITRES PER HOUR.

OUR MACHINES ARE SUPPLIED WITH CLASS 'AA' AIR
GAP AS STANDARD.

2 Drain

DRAIN - 2 METRE FLEXIBLE HOSE TO A 40 mm
TRAPPED STANDPIPE 500mm MAX A.F.F.L.

FLOW RATE 30 LITRES PER MINUTE.
DRAIN RATE TYPICALLY 3 MINUTES.

Other Services

RINSE AGENT HOSE - 2.5 METRE FLEXIBLE.
DETERGENT HOSE - 2.5 METRE FLEXIBLE.

3 Electric

7.1kW 400/50/3 + N + E FUSED AT **16amps** / PHASE.
MACHINE SUPPLIED WITH 2.5 METRES OF CABLE
(3 PHASE).

CONFIGURABLE TO:
5.0kW 230/50/1 FUSED AT **25amps**

Notes

Approx Weights: EMPTY: 101kg's WITH WATER: 133kg's
Min distance to Wall to Inside of tabling boxed edge 154.5mm.
HEIGHTS MARKED * REPRESENT ± 20 mm.