



## C0133M - Lincat Convector Manual+ Electric Counter-top Convection Oven - W 610 mm - D 750 mm - 3.0 kW

Able to roast, braise, bake and reheat, a C0133M Convector convection oven is a powerful addition to any commercial kitchen.

- ✓ 3 x GN2/3 capacity
- ✓ Easy-to-use knob-driven control, and electronic fan control
- ✓ Mechanical temperature control from 60° to 260° C
- ✓ Even heat distribution thanks to electronically controlled two-speed, bi-directional fan
- ✓ Two fan speeds - standard for general use and slow for delicate items
- ✓ 120 minute count down timer with electronically-controlled buzzer
- ✓ Oven lamps flash when cook cycle has finished - see when your food is done even in the busiest kitchen

### Specifications

Summary		Power and Performance	
<b>Brand</b>	Lincat	<b>Total Power kW</b>	3.0
<b>Range</b>	Convector	<b>Temperature Range °C</b>	60-260
<b>Series</b>	Manual+	<b>IP Rating</b>	IP23
<b>Power Type</b>	Electric	<b>Controls Position</b>	Right hand side
<b>Unit Type</b>	Counter-top	<b>Temperature Control</b>	Mechanical
<b>Available in UK Only</b>	No	<b>Timer Range mins</b>	1-120
<b>UK Warranty</b>	2 Years Parts and Labour Warranty	<b>Oven Rating kW</b>	2.8
<b>Export Warranty</b>	Contact your local dealer		
<b>GTIN</b>	5056105118244		




Key Specifications		Capacity	
Stackable	Yes (with optional kit)	Gastronorm Capacity	3 x GN2/3
Feet Height/Type	55mm/adjustable	Shelf Spacing mm	80
Continuous Plug-In Door Seal	Yes	Sheet Pan Capacity	3 x 460 mm x 330 mm
Removable Inner Door Glass	Yes	Capacity Litres	53.0
Handle Type	Grab		
Vented Door	Yes		
Reversible Door	No		
Door Type	Drop down		
Phased Cooking	No		
Shelf Timer(s) (Number)	No		
Grill Element/Mode	No		
Core Temp Probe	No		
Steam Injection	No		
Fan(s) Speed	2		
Fan(s) Type	Bi-Directional		
Number of Fan(s)	1		
Euronorm Compatible	No		
Sheet Pan Compatible	Yes		
Removeable Shelf Guides	Yes		
Manual Mode	Yes		
Programmable	No		
Timer Type	Mechanical		
Number of Shelves included	3		
Number of Shelf Positions	3		
Type of Lighting	Halogen Bulb		
Construction/Finish	430 S/S cavity		
GN Compatible	Yes		

Weights and Dimensions		Supply Connections	
Unit Height (External) mm	645	Requires Installation	No
Unit Width (External) mm	610	Requires Electrical Supply	Yes
Unit Depth (External) mm	750	UK 3 Pin Plug	Yes
Height (Internal) mm	308	Requires Hardwiring	No
Width (Internal) mm	490	Electrical Supply Rating Watts	3,000
Depth (Internal) mm	370	Single Phase Amps	13.0
Shelf Dimensions Width mm	460	Single Phase Voltage	230
Shelf Dimensions Depth mm	325	USB Port	No
Net Weight Kg	61.2		

Shipping	
Packed Weight Kg	67.32
Packed Height cm	81.5
Packed Width cm	70
Packed Depth cm	95

Available Accessories	
CO100/FS	Lincat Convector Floor Stand for C0133M/C0133T Convection Ovens - with 4 Runners - W 610 mm
CO100/LFSK	Lincat Convector Low Floor Stand and Stacking Kit for C0133M/C0133T Convection Ovens - with 1 Runner - W 610 mm

### Technical Picture

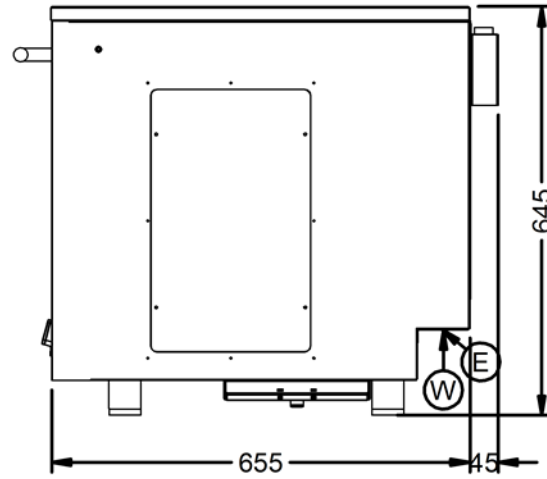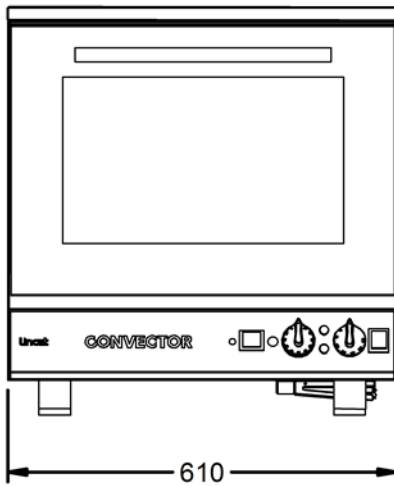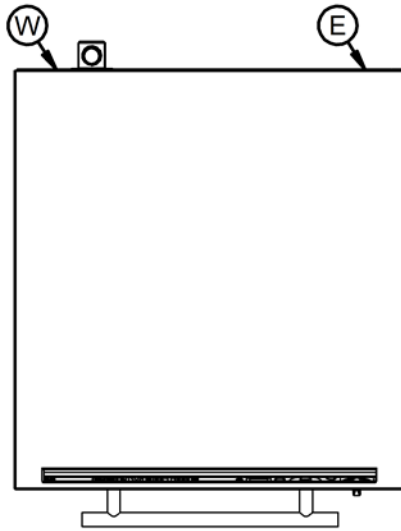

**Lincat Limited**

Whisby Road,  
Lincoln, LN6 3QZ,  
United Kingdom

**Company No:** 2175448

A member company of



**Customer Care**

**Tel:** +44 1522 875500  
**Email:** care@lincat.co.uk

**Export Customers**

**Tel:** +44 1522 875536  
**Email:** export@lincat.co.uk

**Opening Hours**

**Monday – Friday:**  
8.30am – 5pm