ICEMATIC

CHERRY

C28 +

28 kg/ 24h

C28 + ALL GAS
220-240/50/1
Spray Ice Makers

Spray Ice Makers / Spray Ice Makers:
C28 - C28 + - C38 - C38 FL - C38L - C38XL - C46 - C46 FL - C46L - C46XL - C54 - C54 FL - C70 - C70L - C70XL - C90 - C90L - C90XL

RAINBOW TECHNOLOGY | PROGRAMMED OZONE CYCLE | SCHEDULED PRODUCTION | TOUCH CONTROL | BLUETOOTH | SAFE ICE | PUMP

FEATURES

- Steel shell
- Air or water condensation
- Sanitization cycle
- Programmable ice production
- Capacitive control key
- Audible and light signaling alarms
- HACCP Alarm Report
- External cube weight adjustment
- USB connection for sw update and HACCP data download
- Condenser fan controlled at low ambient temperatures
- Programmable ice production
- Predictive failure analysis
- Equipment performance report

OPTIONAL

- Programmable sanitizing cycle with ozone
- Nanotechnological evaporator treatment with Rainbow Technology
- Feet kit 100mm



RECOMMENDED DEPOSITS

7,0 kg
350 pcs

DIMENSIONS

L x P x H (mm)

400 x 480 x 600

460 x 600 x 850

VOLTAGE

220-240/50/1
220/60/1

GAS

R290
GWP 3

ICE TYPE

		PCS / CYCLE PZ / CICLO	WEIGHT ICE PESO GHIACCIO
	Full Ice Cube 20 g -28/28+ 35 x 37 x 32 mm	18	20 g

ICE PRODUCTION

kg/24h
lbs/24h

Air cooling

Temp. Aria Air Temp. °C / °F	Temp. Acqua /Water Temp. 10° 50°	15° 59°	21° 70°	32° 90°
10° 50°	28 62	26 57	24 53	20 44
21° 70°	25 55	23 51	22 48	18 40
32° 90°	22 48	20 44	19 42	15 33
38° 100°	18 40	17 37	16 35	13 29

Water cooling

Temp. Aria Air Temp. °C / °F	Temp. Acqua /Water Temp. 10° 50°	15° 59°	21° 70°	32° 90°
10° 50°	28 62	26 57	24 53	20 44
21° 70°	27 60	25 55	23 51	19 42
32° 90°	26 57	24 53	22 48	18 40
38° 100°	21 46	20 44	18 40	16 35

TECHNICAL DATA

			cond	comp. W	ABS. W	Fuse	Kwh/100Kg	l / h	Kg	Kg
C28 +	A AG	220-240/50/1N		653	310	10	36.6	2.6	35	30
C28 +	W AG	220-240/50/1N		653	280	10	22.8	38.7	35	30

Via del Lavoro, 9 31033 Castelfranco Veneto (TV) Tel.
+39 0423.738452 Fax +39 0423.722811
email: info@castelmac.it
www.castelmac.eu - www.icematic.eu

ICEMATIC

CHERRY


C28 +

28 kg/ 24h

C28 + ALL GAS
220-240/50/1
Spray Ice Makers

Spray Ice Makers / Spray Ice Makers:
C28 - C28 + - C38 - C38 FL - C38L - C38XL - C46 - C46 FL - C46L - C46XL - C54 - C54 FL - C70 - C70L - C70XL - C90 - C90L - C90XL

DIMENSIONS

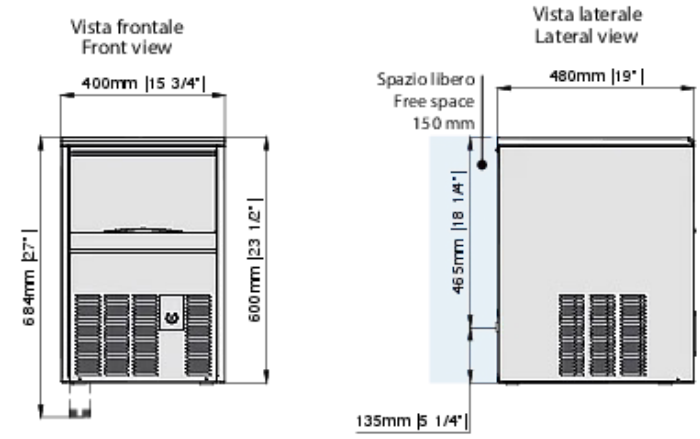



B Electrical cable supply
Ingresso alimentazione elettrica

C Water outlet connection
Attacco scarico acqua Ø 20 mm

D Water outlet connection water condensation / Uscita acqua condensatore ad acqua Ø 20 mm- 3/4"G

E Water inlet connection / Attacco entrata acqua - 3/4"G

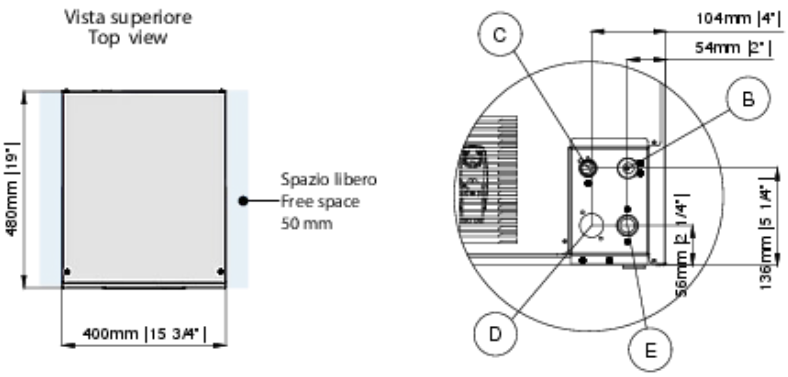




Schuko plug
Spina schuko




Kit 4 Feet
Kit 4 piedini
Ø50mm H100-120 mm
(Opzionali-optional)

MyICE

Allows control and monitoring of ice makers directly from smartphones / Allows control and monitoring of ice makers directly from smartphones

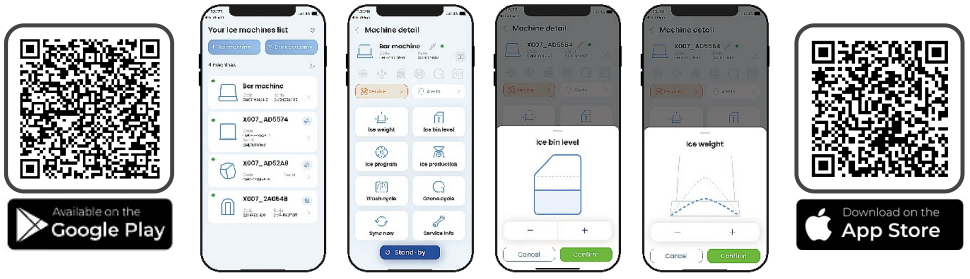

TOUCH CONTROL



Capacitive Stand-by / Start button
(LED continuously changing colors from white to red)

Operating conditions

	Min	Max
Temp. Ambient	10°C	40°C
Temp. Water Ice	5°	35°
Water Pressure	1 Bar (14psi)	10 Bar (140psi)
Conductivity water	20 microS	500 microS
Power Supply	-10%	+10%

Heat expelled	947 W
Air Volume	185 m³/h

Via del Lavoro, 9 31033 Castelfranco Veneto (TV) Tel. +39 0423.738452 Fax +39 0423.722811
email: info@castelmac.it
www.castelmac.eu - www.icematic.eu