ICEMATIC

CHERRY

C46

46 kg/ 24h

C46 ALL GAS
220-240/50/1
Spray Ice Makers

Spray Ice Makers / Spray Ice Makers:
C28 - C28 + - C38 - C38 FL - C38L - C38XL - C46 - C46 FL - C46L - C46XL - C54 - C54 FL - C70 - C70L - C70XL - C90 - C90L - C90XL

RAINBOW TECHNOLOGY | PROGRAMMED OZONE CYCLE | SCHEDULED PRODUCTION | TOUCH CONTROL | SAFE ICE | BLUETOOTH | USB | PUMP

FEATURES

- Steel shell
- Air or water condensation
- Sanitization cycle
- Programmable ice production
- Capacitive control key
- Audible and light signaling alarms
- HACCP Alarm Report
- External cube weight adjustment
- USB connection for sw update and HACCP data download
- Condenser fan controlled at low ambient temperatures
- Programmable ice production
- Predictive failure analysis
- Equipment performance report

OPTIONAL

- Programmable sanitizing cycle with ozone
- Nanotechnological evaporator treatment with Rainbow Technology
- Feet kit 100mm



RECOMMENDED DEPOSITS

15,0 kg
750 pcs

DIMENSIONS

L x P x H (mm)

500 x 540 x 690

560 x 600 x 850

VOLTAGE

220-240/50/1
220/60/1

GAS

R290
GWP 3

ICE TYPE

	PCS / CYCLE PZ / CICLO	WEIGHT ICE PESO GHIACCIO
Full Ice Cube 20 g -38/46 35 x 37 x 32 mm	28	20 g

ICE PRODUCTION

kg/24h
lbs/24h

Air cooling

Temp. Aria Air Temp.	Temp. Acqua /Water Temp.			
°C / °F	10° 50°	15° 59°	21° 70°	32° 90°
10° 50°	46 101	45 99	41 90	34 75
21° 70°	39 86	38 84	34 75	28 62
32° 90°	37 82	36 79	32 71	26 57
38° 100°	35 77	34 75	30 66	22 48

Water cooling

Temp. Aria Air Temp.	Temp. Acqua /Water Temp.			
°C / °F	10° 50°	15° 59°	21° 70°	32° 90°
10° 50°	41 90	40 88	36 79	32 71
21° 70°	41 90	40 88	36 79	30 66
32° 90°	40 88	39 86	35 77	29 64
38° 100°	37 82	36 79	32 71	24 53

TECHNICAL DATA

			cond	comp. W	ABS. W	Fuse	Kwh/100Kg	l / h	Kg	Kg
C46	A AG	220-240/50/1N		1054	480	10	27.9	3.8	38	47

Via del Lavoro, 9 31033 Castelfranco Veneto (TV) Tel.
+39 0423.738452 Fax +39 0423.722811
email: info@castelmac.it
www.castelmac.eu - www.icematic.eu

ICEMATIC

CHERRY


C46

46 kg/ 24h

C46 ALL GAS
220-240/50/1
Spray Ice Makers


Spray Ice Makers / Spray Ice Makers:
C28 - C28 + - C38 - C38 FL - C38L - C38XL - C46 - C46 FL - C46L - C46XL - C54 - C54 FL - C70 - C70L - C70XL - C90 - C90L - C90XL

DIMENSIONS

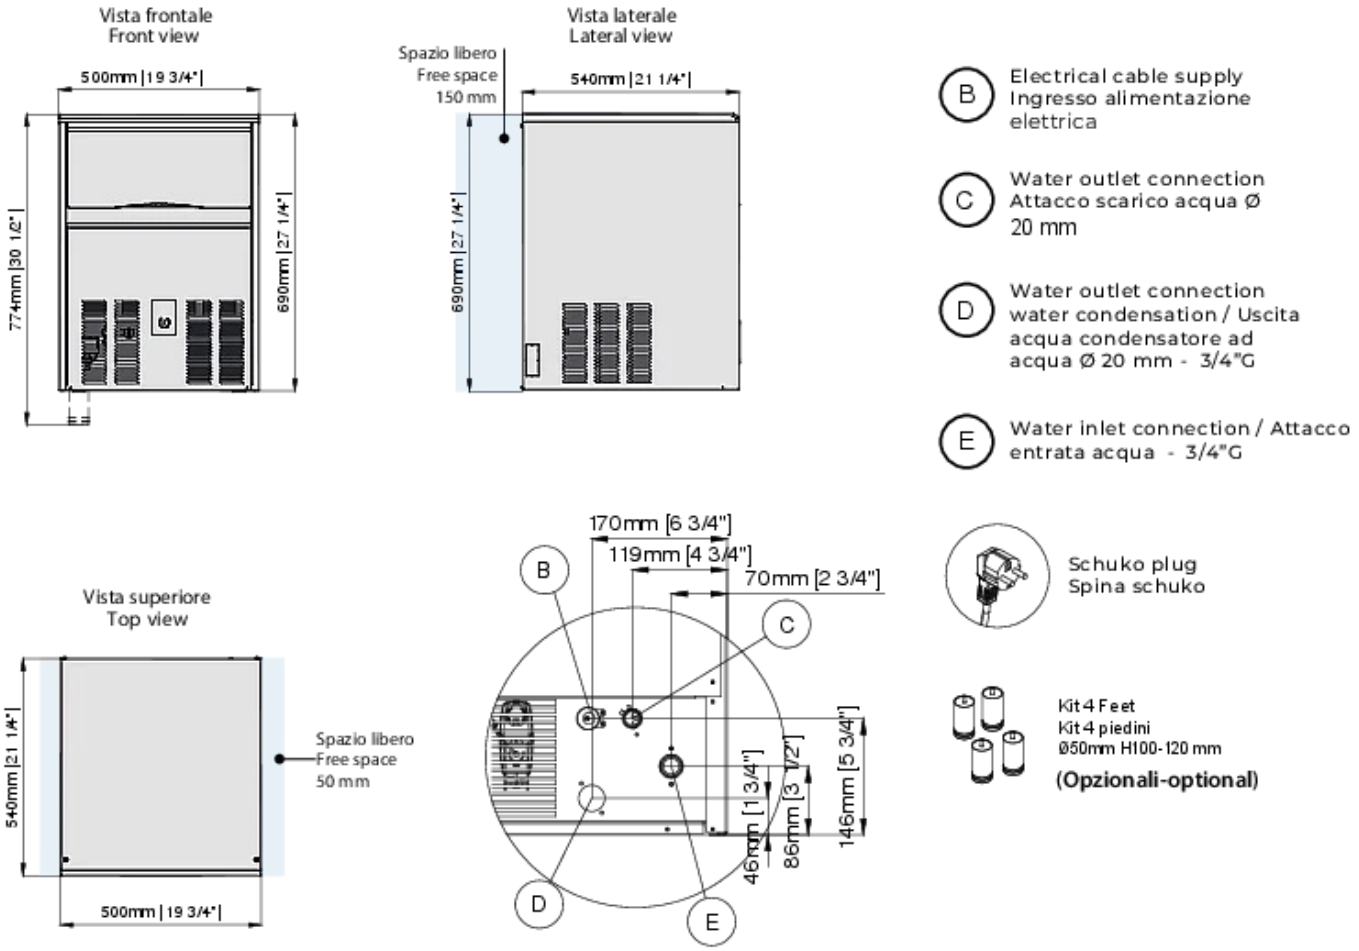


MyICE

Allows control and monitoring of ice makers directly from smartphones / Allows control and monitoring of ice makers directly from smartphones

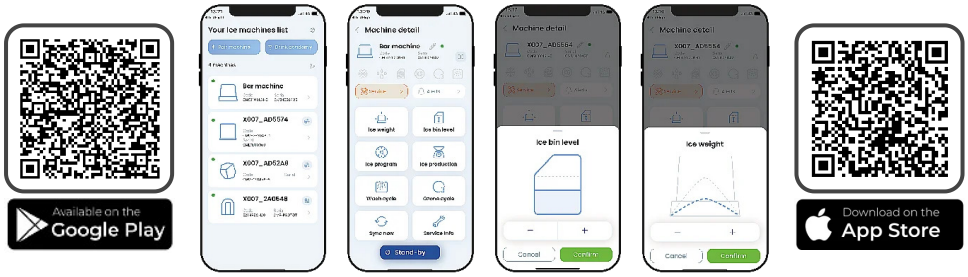

TOUCH CONTROL



Capacitive Stand-by / Start button
(LED continuously changing colors from white to red)

Operating conditions

	Min	Max
Temp. Ambient	10°C	40°C
Temp. Water Ice	5°	35°
Water Pressure	1 Bar (14psi)	10 Bar (140psi)
Conductivity water	20 microS	500 microS
Power Supply	-10%	+10%

Heat expelled	1537 W
Air Volume	185 m³/h

Via del Lavoro, 9 31033 Castelfranco Veneto (TV) Tel. +39 0423.738452 Fax +39 0423.722811
email: info@castelmac.it
www.castelmac.eu - www.icematic.eu