



LCC Carina 02

EN | STANDARD FITTINGS

- integral condensing unit
- fan-assisted refrigeration
- double glazed front glass with screen printing, tilt forward
- double glazed side glass with screen printing
- double glazed rear doors, sliding (EXT, INT – hinged)
- three rows of glass shelves
- waterproof base shelf
- top LED lighting and illumination of each shelf
- electronic control panel
- electric defrost (1,0 and 1,4), natural defrost (0,6, EXT, INT)
- automatic condensate evaporation
- colour of profiles: gold or silver
- colour of screen printing: black, gold or silver
- wooden elements: toscany walnut, verona dark ash

PL | WYPOSAŻENIE STANDARDOWE

- agregat wbudowany
- chłodzenie dynamiczne
- szyba gięta zespolona pokryta sitodrukiem, uchylna
- szyby boczne zespolone pokryte sitodrukiem
- tylne drzwiczki zespolone, przesuwne (EXT, INT – uchylne)
- trzy rzędy półek szklanych
- blat ze sklejki wodoodpornej
- podświetlenie górne LED oraz każdej półki
- sterownik elektroniczny
- odmrażanie elektryczne (1,0 i 1,4), odmrażanie naturalne (0,6, EXT, INT)
- automatyczne odparowanie skroplin
- kolor profili: złoty lub srebrny
- kolor sitodruku: czarny, złoty lub srebrny
- elementy drewniane: orzech Toskania, jesion Werona ciemny

es SYSTEM K

USE | DO UŻYTKU



STORAGE | PRZECHOWYWANIE



ADVANTAGES | ZALETY


- 

lighting at the top and of each shelf
oświetlenie górne i każdej półki
- 


customizable front panels
dowolny wariant zabudowy frontowej
- 

temp. stability on each level
temp. stała na każdym poziomie
- 

easy system of servicing and maintenance
łatwa w eksploatacji i konserwacji

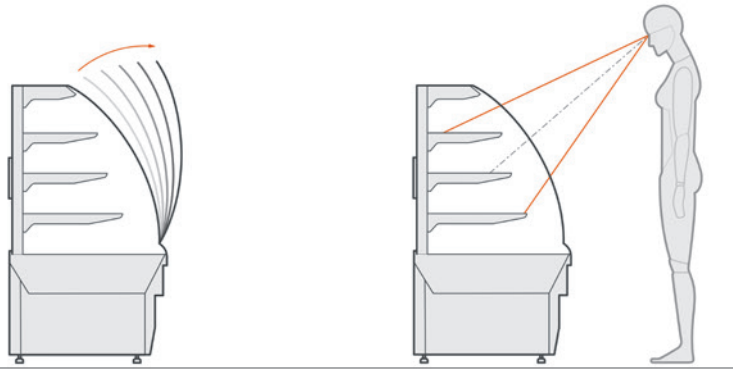

DIMENSIONS | WYMIARY

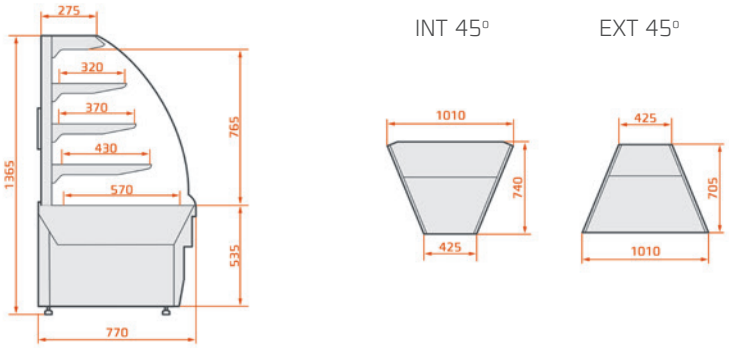

CARINA 02				°C	
INT 45		100	R290*	3H1 / +3 ÷ +8 / +6 ÷ +11	230 V/ 50 Hz
EXT 45		105	R290*	3H1 / +3 ÷ +8 / +6 ÷ +11	230 V/ 50 Hz
0,6	600	85	R290*	3H1 / +3 ÷ +8 / +6 ÷ +11	230 V/ 50 Hz
1,0	940	135	R290*	3H1 / +3 ÷ +8 / +6 ÷ +11	230 V/ 50 Hz
1,4	1 440	250	R290*	3H1 / +3 ÷ +8 / +6 ÷ +11	230 V/ 50 Hz

* also available: R452A, R404A