



**Warewashing
Large Glasswasher with Drain
Pump and Detergent Dispenser - 1
Cycle-30B/H**



Warewashing

**Large Glasswasher with Drain Pump
and Detergent Dispenser - 1 Cycle-30B/
H**

CK1400

Glasswasher (large) with drain
pump and detergent
dispenser, 1 cycle, 30b/h

Short Form Specification

Item No.

304 AISI stainless steel front panel and wash and rinse arms. Double skinned door. Upper and lower rotary washing arms and rinsing arms. Separate washing and rinsing circuits. Built-in 5 litre boiler, washing temperature 55/65°C and hot rinse temperature 80/90°C. 1 washing cycle: 120 seconds. Rinse aid dispenser. Detergent dispenser. Drain pump. Hourly capacity: 30 baskets

Supplied with: n. 1 basket for glasses (400x400mm).

Main Features

- Built-in pressure boiler sized to raise incoming water to guarantee a minimum rinsing temperature of 82 °C for sanitizing rinse. No external booster is required.
- Low noise level.
- Simple service from the front.
- Equipped with drain pump for easy and quick installation without opening the machine.
- Built-in rinse water heater to increase the temperature of the final rinse water.
- Simple control panel.
- 120 seconds cycle.
- Detergent dispenser for easy connection to the external detergent source.
- WRAS approved product.

Construction

- Unit to feature smooth surfaces to facilitate cleaning.
- Completely closed on the back by a cover plate.
- Unit to feature rinse aid dispenser pump.
- Fully pressed wash tank with rounded corners.
- Internal elements (arms and filter) easily extractable.
- Double skinned construction.
- Wash/rinse arms and nozzles in stainless steel.
- Finished in top quality materials to ensure durability.
- 304 AISI stainless steel front panel, load bearing frame, wash tank, wash and rinse arms.

APPROVAL: _____





Warewashing
Large Glasswasher with Drain Pump and
Detergent Dispenser - 1 Cycle-30B/H


Included Accessories

- 1 of BASKET FOR GLASSES-395X395X115 MM PNC 867033


Optional Accessories

- STAINLESS STEEL TANK FILTER FOR GLASSW. PNC 864003 ☐
- FILTER FOR PARTIAL DEMINERALIZATION PNC 864017 ☐
- KIT TO MEASURE TOTAL/PART.WATER PNC 864050 ☐
HARDNESS
- RINSE BOOSTER PUMP-SING.TANK PRESSURE PNC 864051 ☐
DW
- YELLOW CUTLERY CONTAINER PNC 864242 ☐
- FILTER FOR TOTAL DEMINERALIZATION PNC 864367 ☐
- KIT 4 PLASTIC BOXES FOR CUTLERY-YELLOW PNC 865574 ☐
- COVER GRID FOR SMALL/LIGHT ITEMS IN RACK PNC 867016 ☐
- BASKET FOR 16/8 PLATES DIAM.190/240 MM PNC 867052 ☐
- BASKET FOR GLASSES-395X395X100 MM PNC 867053 ☐
- BASKET FOR GLASSES-395X395X200 MM PNC 867054 ☐
- BASKET FOR GLASSES+SAUCERS/CUTLERY INS.PNC 867055 ☐
- BASKET F.GLASSES-ANGLED PNC 867056 ☐
BASE-395X395X200
- ROUND BASKET KIT WITH SQUARE FRAME PNC 867057 ☐
- INSERT FOR"FLUTE"GLASSES PNC 867058 ☐
- INSERT FOR 14 SAUCERS PNC 867060 ☐
- INCLINED INSERT FOR CUPS PNC 867061 ☐
- INSERT FOR 7 PLATES DIAM. 240 MM PNC 867062 ☐

Front

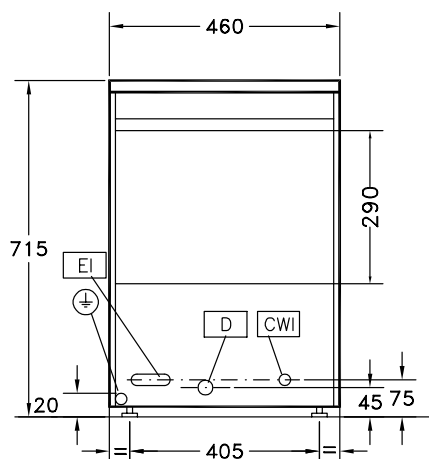


Top

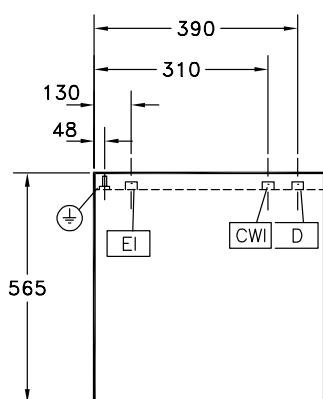

CWI

- = Cold Water inlet
- D** = Drain
- EI** = Electrical connection
- EO** = Electrical Outlet
- EQ** = Equipotential screw
- V** = Air vents
- WI** = Water inlet
- XD** = Detergent connection
- XR** = Rinse aid connection

Side

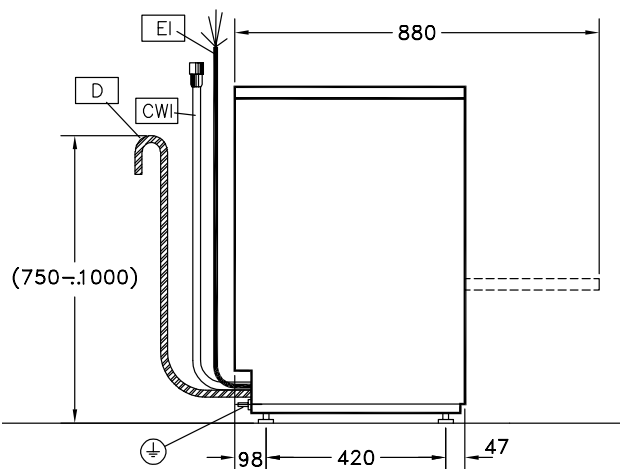

Electric

Supply voltage:	230 V/1N ph/50 Hz
CK1400	
Total Watts:	2.3 kW
Boiler heating elements:	2 kW
Tank heating elements:	0.8 kW
Wash pump size:	0.3 kW

Water:

Pressure:	1.8-3 bar
Water supply temperature:	10 °C
Inlet Water supply pressure:	26 - 44 psi (1.8 - 3 bar)
Boiler Capacity (lt):	5
Drain line size:	27mm
Inlet water supply hardness (MAX):	
Incoming water line size:	G 3/4"
Washing cycle temperature:	55-65 °C
Washing cycle tank capacity (lt):	6
Hot rinse cycle temperature:	80-90 °C
Hot rinse cycle water consumption (lt):	2.3

Key Information:

N° of working cycles - sec.:	1 (120)
External dimensions, Height:	715 mm
External dimensions, Width:	460 mm
External dimensions, Depth:	565 mm
Net weight:	37 kg
Shipping weight:	42 kg
Shipping height:	900 mm
Shipping width:	500 mm
Shipping depth:	620 mm
Shipping volume:	0.28 m³
Noise level:	<61 dBA
Basket capacity:	30/h
Cell dimensions - width:	400 mm
Cell dimensions - depth:	400 mm
Cell dimensions - height:	290 mm