




### CTU Vapour | optimised for steam ovens

Our range of Vapour Calcium Treatment Units are specially formulated for use with steam ovens and catering equipment using steam.

Untreated equipment such as Combi Ovens, Pasta Cookers, Bratt Pans or Boilers will suffer from a build-up of limescale which will attack elements, oven chambers and sensors will lead to expensive breakdowns and unexpected kitchen down-time.

The perfect alternative to single-use plastic water filters, the CTU can be regenerated, recycled, and returned to market making it a genuinely green filter providing not only protection for your equipment, but protecting the environment and keeping our oceans and landfill free from plastic.

**Available in 10, 18, 23 and 30 litre capacities.**

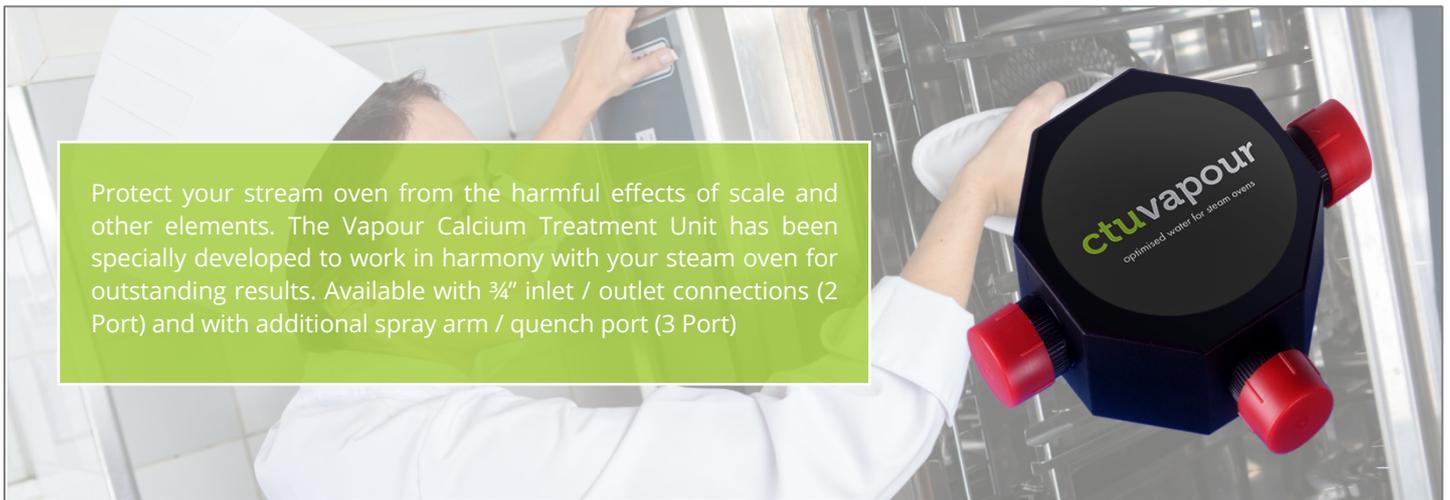


Protect your steam oven from the harmful effects of scale and other elements. The Vapour Calcium Treatment Unit has been specially developed to work in harmony with your steam oven for outstanding results. Available with  $\frac{3}{4}$ " inlet / outlet connections (2 Port) and with additional spray arm / quench port (3 Port)

#### Features & Benefits

- Exceptional protection for steam ovens
- Increased capacities across the range
- WRAS Approved
- Simple installation
- Protects catering equipment from limescale meaning, prolonged machine life and reduced breakdown and repair costs
- Unbeatable pence per litre
- 100% Recyclable, just return to [WaterCare Recycling](#)

**100% RECYCLABLE**

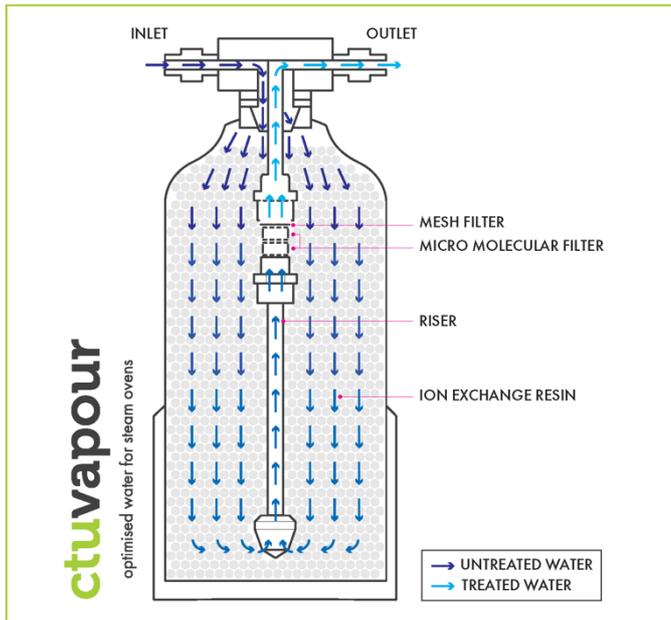

### CTU Vapour Specifications

Min Pressure	1.5 bar
Max Pressure	6 bar
Max Temperature (°c)	35
Connections	3/4" BSP
Operation Position	Vertical

This illustration serves as explanation of the filter technology. It is not to scale.

For more information, please visit [www.watercare.co.uk/ctu-vapour/](http://www.watercare.co.uk/ctu-vapour/)

## Part Descriptions & Codes

### CTU Vapour | Optimised for steam ovens

Available with 3/4" inlet / outlet connections (2 Port) and with additional spray arm / quench port (3 Port)

Description	Application	Dimensions H x W (mm)	Capacity (Litres)	Part No. 2P NEW	Part No. 2P REGEN	Part No. 3P NEW	Part No. 3P REGEN
CTU VAPOUR 10	6 GRID COMBI OVEN	485 x 200	7677	VAPOUR-2P-10	CTU102P-R	VAPOUR-3P-10	CTU103P-R
CTU VAPOUR 18	10 GRID COMBI OVEN	545 x 263	15355	VAPOUR-2P-18	CTU182P-R	VAPOUR-3P-18	CTU183P-R
CTU VAPOUR 23	20 GRID COMBI OVEN	648 x 263	17194	VAPOUR-2P-23	CTU232P-R	VAPOUR-3P-23	CTU233P-R
CTU VAPOUR 30	STACKED OVENS	963 x 263	29858	VAPOUR-2P-30	CTU302P-R	VAPOUR-3P-30	CTU303P-R

Application	Direct Feed (No Quench)	Boiler Fed (with Quench)
6 GRID COMBI OVEN	VAPOUR-2P-10-PK	VAPOUR-3P-10-PK
10 GRID COMBI OVEN	VAPOUR-2P-18-PK	VAPOUR-3P-18-PK
20 GRID COMBI OVEN	VAPOUR-2P-23-PK	VAPOUR-3P-23-PK

Capacity based on water hardness of 12° Clarke / 180 PPM.

\*Packs include meter and hoses

### European WaterCare Ltd.

Regal House, South Road, Harlow, Essex, CM20 2BL.

Tel: 01279 780250 | Email: [info@watercare.co.uk](mailto:info@watercare.co.uk)

Visit: [www.watercare.co.uk](http://www.watercare.co.uk) | [@europeanwtrcare](https://twitter.com/europeanwtrcare)



# WATERCARE