



GENERAL PURPOSE OVEN RANGES



E3101D Three
Hotplate Range

MODELS and ACCESSORIES

E3101D 3HP - Three hotplate range - general purpose oven

E3101D 4HP - Four hotplate range - general purpose oven

E3161D 3HP - Three hotplate range - general purpose oven

- Fully integrated extended flue
- Splashplate and plateshelf
- Oven shelf
- Factory fitted, adjustable castors
- Fixed installation kit
- Suiting kit

INSTALLATION NOTES

Adequate ventilation must be provided to supply sufficient fresh air and to allow easy removal of any such products that may present a risk to health. Please consult current legislation for details that relate to specific locations.

Install unit on a level, fireproof surface in a well-lit position. If floor is made of a combustible material, local fire requirements must be checked to ensure compliance.

A clearance of 150mm should be observed between appliance and any combustible wall.

KEY FEATURES

- Drop-down door with 90° position hinge
 - *quick access to load and unload oven*
- Full depth heavy duty cast iron hotplates
 - *Allow multiple cooking positions*
- Three and four hotplate models available
 - *Provides versatility for varied menus*
- Fast-acting circular hotplates
 - *Reduces heat up times, energy efficient*
- Full width, removable drip tray
 - *Retains spillages and keeps unit clean*
- Vitreous enamelled oven chamber
 - *Easy to clean and to keep clean*
- Wide oven temperature range of 100 - 250°C
 - *Ideal to prepare a wide variety of food*
- Oven has 5 shelf positions to allow 2 shelf cooking
 - *Versatile, ideal for a wide range of menu items*
- Low profile door handle
 - *Reduces intrusion into work space*
- Laser-etched control icons
 - *Permanent, indelible markings*






DOMINATOR PLUS

GENERAL PURPOSE OVEN RANGES

MODEL DIMENSIONS (in mm)

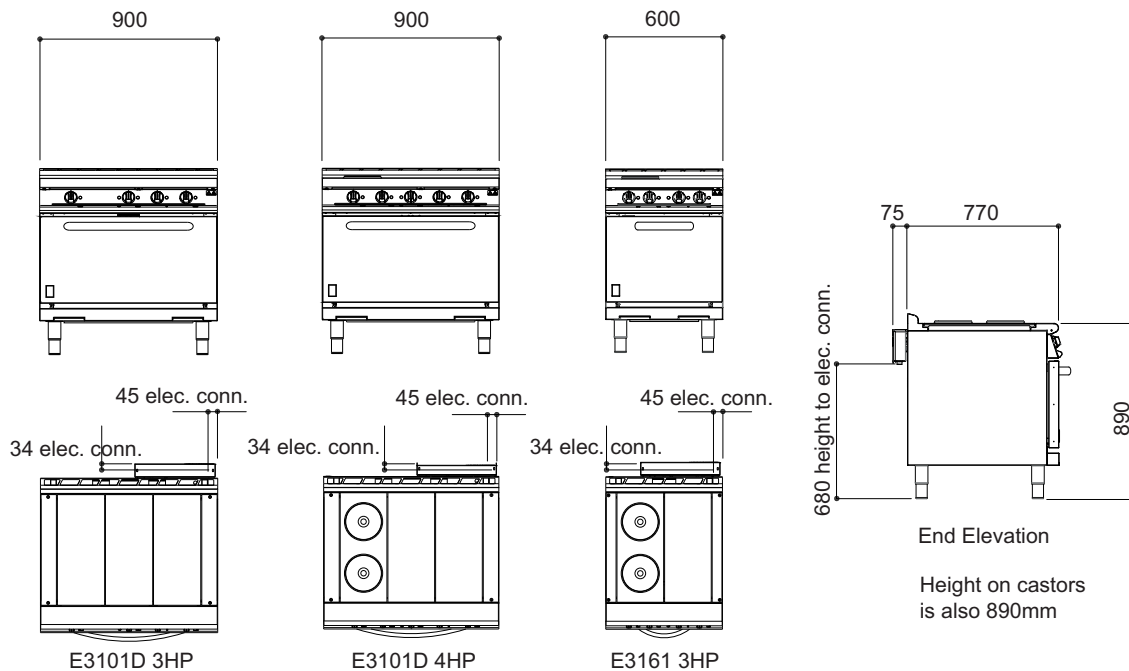

SPECIFICATION DETAILS

	E3101D 3HP	E3101D 4HP	E3161 3HP
Electrical rating (kW)	14.6	15.1	11.5
Electrical supply voltage	400V 3N~ / 230V~	400V 3N~ / 230V~	400V 3N~ / 230V~
Minimum electrical supply 230V ~ (amps)	100	100	100
Minimum electrical supply 400V 3N~ (amps)	32	32	32
Electrical current split (amps)	L1: 14 / L2: 28 / L3: 22	L1: 22 / L2: 22 / L3: 22	L1: 16 / L2: 14 / L3: 20
Hotplate rating (kW)	3.22 x 3	3.22 x 2 / 1.75 x 2	3.22 x 1 / 1.75 x 2
Total oven element rating (kW)	5.1	5.1	4.6
Oven dimensions (w x d x h - mm)	700 x 535 x 430	700 x 535 x 430	400 x 535 x 430
Oven shelf (w x d - mm)	700 x 535	700 x 535	400 x 535
Gastronorm compatibility	2/1	2/1	1/1
Weight (kg)	154	155	144
Packed weight (kg)	167	168	154