

## FilterFlow Automatic Water Boilers

### Key Features

- Type: Electric
- Built-in filtration cartridge
- Electronic control system
- Adjustable temperature (70 – 96°C)
- Standby mode
- Advanced diagnostics
- LCD information panel
- Non-drip tap
- Supplied with removable drip tray and water feed hose (1m)
- WRAS approved



EB3F

### Construction

- Body: stainless steel grade 430
- Internal tank: stainless steel grade 304
- Trim: Black ABS Plastic

### Available Options


- Choice of sizes
- Single and twin tap options

### Available Accessories

- BR49 Wall mounting kit for EB3F and EB4F
- BR50 Wall mounting kit for EB6F and EB6TF
- FC02 Replacement filter cartridge

## Specifications

Model	EB3F	EB4F	EB6F	EB6TF
External height (mm)	652	652	652	652
External width (mm)	290	290	455	455
External depth (mm)	465	465	465	465
Output per hour (litres)	31	45	60	60
Rapid Draw-off (litres)	9	9	17	17
Recovery per minute (litres)	0.52	0.75	1.00	1.00
Net weight (unpacked) kg	13	13	17	17
Gross weight (packed) kg	15	15	19	19
Shipping volume (m <sup>3</sup> )	0.159	0.159	0.217	0.217
Water inlet connection	¾" BSP male	¾" BSP male	¾" BSP male	¾" BSP male
Water inlet pressure (bar)	1 to 8	1 to 8	1 to 8	1 to 8
Total power rating (kW)	3	4.5	6.0	6.0
Standby power consumption (kW)	0.1	0.1	0.1	0.1
Electrical supply 1N~+E 230V 50-60Hz Current Rating (A)	13	20	26	26
Electrical supply 3N~+E 400V 50-60Hz Current Rating (A)	N/A	N/A	L1-13 L2-13 L3-N/A	L1-13 L2-13 L3-N/A

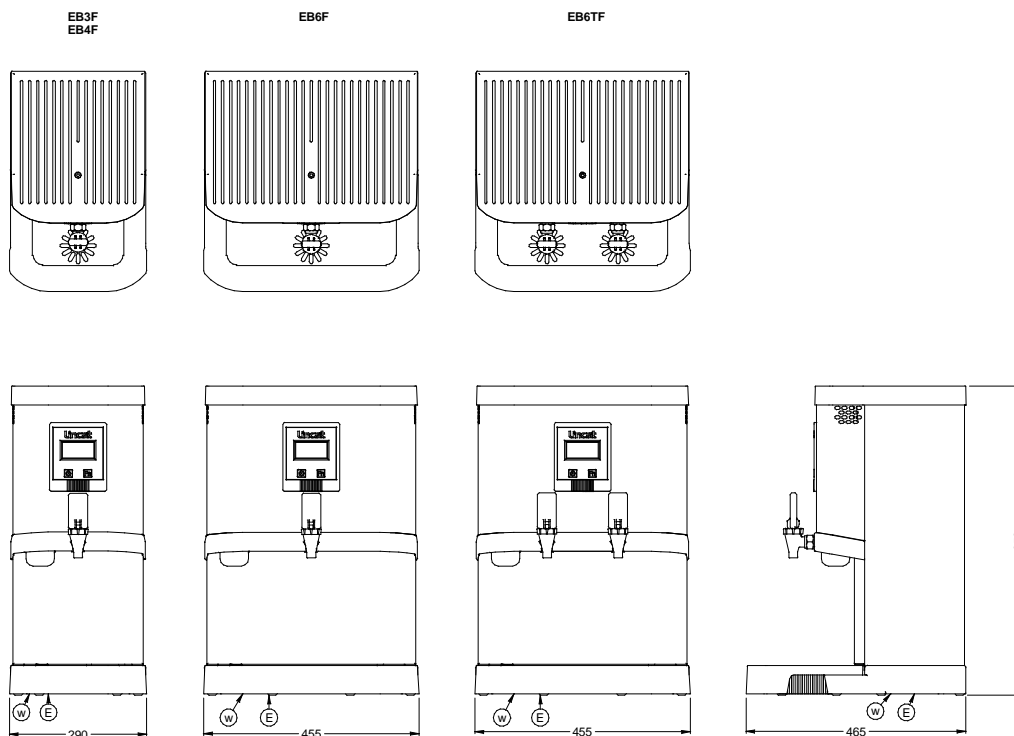

Lincat Limited, Whisby Road,  
Lincoln LN6 3QZ,  
United Kingdom

UK Sales Tel: 01522 875500 UK Spares Tel: 01522 875510 UK General Tel: 01522 875555  
UK Fax: 01522 875530 International Sales Tel: +44 1522 503250 International Fax: +44 1522 875530  
Website: [www.lincat.co.uk](http://www.lincat.co.uk) UK Sales e-mail: [sales@lincat.co.uk](mailto:sales@lincat.co.uk) International Sales e-mail: [export@lincat.co.uk](mailto:export@lincat.co.uk)



Document ref:  
FILTERFLOWBOILERS  
Issue date: Oct-09