



EC08 - Lincat Electric Counter-top Convection Oven - W 787 mm - D 644 mm - 3.0 kW

Cook your way with this versatile 3kW Lincat Electric Convection Oven.

- ✓ Designed to meet the needs of even the most demanding professional kitchen. Versatile and great for roasts, pizzas, pies and bakery products
- ✓ The excellent twin fan air circulation system delivers a highly efficient air circulation ensuring consistent, even and faster cooking times
- ✓ Accommodates 1/1GN containers for convenient operation
- ✓ Fast heat up from cold saves time and money and fast recovery times
- ✓ Water injection facility gives a professional finish to breads and pastries. The useful cook and hold facility reduces oven temperature to 80 degs C at end of cooking period
- ✓ Double-glazed door for energy efficiency
- ✓ Stackable for added flexibility and to make the best of use of floorspace
- ✓ Robust stainless steel construction

Specifications

Summary

Brand	Lincat
Range	Specialist
Power Type	Electric
Unit Type	Counter-top
Available in UK Only	No
UK Warranty	2 Years Parts and Labour Warranty
Export Warranty	Contact your local dealer
GTIN	5056105101673

Power and Performance

Total Power kW	3.0
Temperature Range °C	50-300
IP Rating	IP23
Controls Position	Right hand side
Temperature Control	Mechanical
Timer Range mins	1-60; 1-180
Oven Rating kW	3.0




Key Specifications		Capacity	
Stackable	Yes	Gastronorm Capacity	3 x GN1/1
Feet Height/Type	25mm/adjustable	Euronorm Capacity	3
Continuous Plug-In Door Seal	Yes	Shelf Spacing mm	110
Removable Inner Door Glass	Yes	Sheet Pan Capacity	3 x 460 mm x 330 mm
Handle Type	Pendulum	Capacity Litres	130.0
Vented Door	Yes		
Reversible Door	No		
Door Type	Left Hinged		
Phased Cooking	No		
Shelf Timer(s) (Number)	No		
Grill Element/Mode	No		
Core Temp Probe	No		
Steam Injection	Yes		
Fan(s) Speed	1		
Fan(s) Type	Single Direction		
Number of Fan(s)	2		
Euronorm Compatible	Yes		
Sheet Pan Compatible	Yes		
Removeable Shelf Guides	Yes		
Manual Mode	Yes		
Programmable	No		
Timer Type	2 x Mechanical		
Number of Shelves included	3		
Number of Shelf Positions	3		
Type of Lighting	Filament Bulb		
Construction/Finish	430 S/S exterior/cavity		
GN Compatible	Yes		

Weights and Dimensions		Supply Connections	
Unit Height (External) mm	575	Requires Installation	No
Unit Width (External) mm	787	Requires Electrical Supply	Yes
Unit Depth (External) mm	644	UK 3 Pin Plug	Yes
Height (Internal) mm	430	Requires Hardwiring	No
Width (Internal) mm	600	Electrical Supply Rating Watts	3,000
Depth (Internal) mm	504	Single Phase Amps	13.0
Shelf Dimensions Width mm	530	Single Phase Voltage	230
Shelf Dimensions Depth mm	325	Water Connection Pressure Bar	0.2-10.0
Net Weight Kg	66.9	Drain Connection	No
		Water Connection	3/4" BSPT
		USB Port	No

Shipping	
Packed Weight Kg	83.7
Packed Height cm	86
Packed Width cm	91
Packed Depth cm	80

Available Accessories	
ECO8/FS	Floor Stand for ECO8
ECO8/LFS	ECO8 LOW FLOOR STAND
ECO8/SK	ECO8 STACKING KIT

Technical Picture

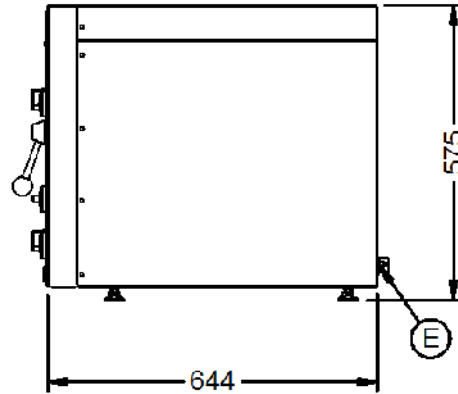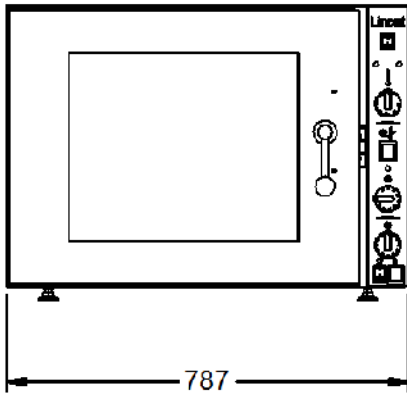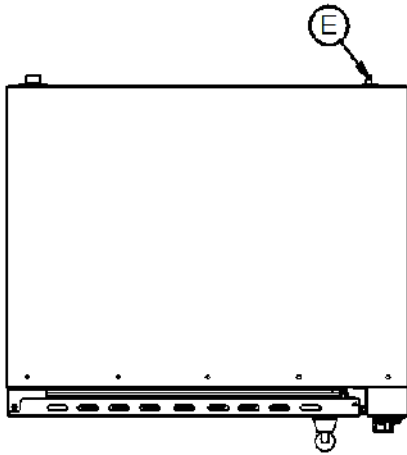

Lincat Limited

Whisby Road,
Lincoln, LN6 3QZ,
United Kingdom

Company No: 2175448

A member company of



Customer Care

Tel: +44 1522 875500
Email: care@lincat.co.uk

Export Customers

Tel: +44 1522 503250
Email: export@lincat.co.uk

Opening Hours

Monday – Friday:
8.30am – 5pm