

# EF 124 EASY FIT

Self Contained Ice Machine up to 120 kg

Item #:
Project:
Quantity:



**FEATURES**

- Produces granular shape ice flakes, 80% hardness.
- Ice scoop holder safely positioned in ice-storage bin.
- Advanced diagnostics computerized control.
- Front panel in and out airflow (air-cooled model only) for built-in installation.
- Front access condenser air filter, removable and washable (air cooled version only).
- Easily accessible, front panel mount, ON-OFF Switch.
- Easy, front panel access to technical / service area of the machine.
- PWD - Progressive Water Discharge: pumps excess residual water up to a distance of 15 meters.



EF 124 EASY FIT  
Flake ice  
Residual water content 25%

**CONDENSING SYSTEM**

Air cooled  
Water cooled

**INTERNAL BIN CAPACITY**

40 kg

**REFRIGERANT GAS**

R404A

**OPERATING REQUIREMENTS**

	Minimum	Maximum
Air temperature	10°C	43°C
Water temperature	5°C	38°C
Water pressure	1 bar (14 psi)	5 bar (70 psi)
Electrical voltage	-10%	+10%

**VOLTAGE V/Hz/ph**

230/50/1

Certifications:



**IMPORTANT NOTICE:**  
Models and specifications are subject to change without notice. This spec sheet is meant for commercial purpose only. For technical documentation please refer to our service manuals.

Download our free App Scotsman Ice  
Apple store  
Google play  
Windows store



[www.scotsman-ice.it](http://www.scotsman-ice.it)  
[www.scotsman-ice.com](http://www.scotsman-ice.com)


Self Contained Ice Machine up to 120 kg

# EF 124 EASY FIT

Self Contained Ice Machine up to 120 kg

Item #:
Project:
Quantity:

Self Contained Ice Machine up to 120 kg

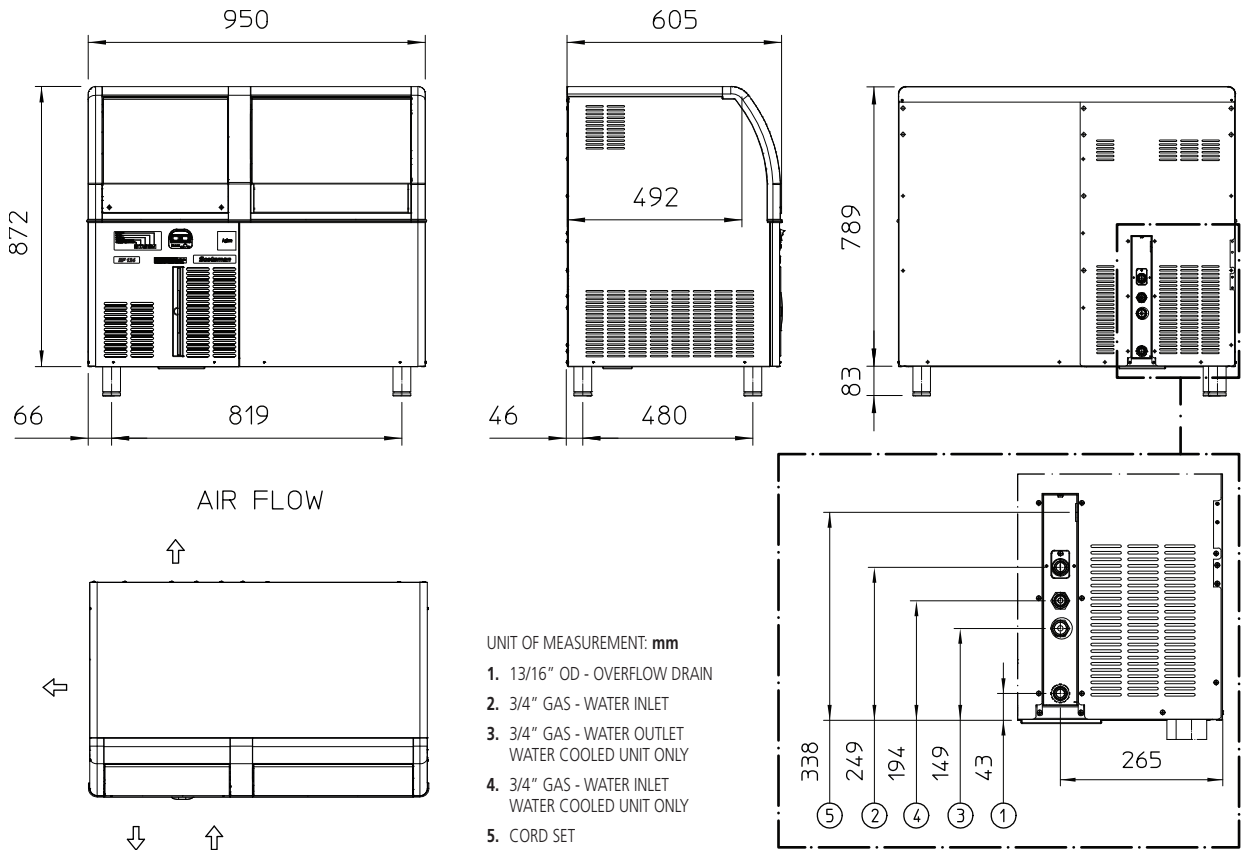

UNIT DATA			Compressor		Circuit wires		Max. fuse size		
			Version	Voltage	Btu/h	W	No.	Ømm <sup>2</sup>	A
Size (W x D x H)	950 x 605 x 872 mm		EF 124 AS	230/50/1	4845	1420	3	1.5	10
Net weight	68 kg		EF 124 WS	230/50/1	4845	1420	3	1.5	10
SHIPPING DATA									
Carton (W x D x H)	1030 x 680 x 960 mm								
Weight	79 kg								
			24 h ice production kg °C Amb. / °C Water			Energy consumption*		Water usage*	Instant power
Version	Condensation	Voltage	10°C/10°C	21°C/10°C	32°C/21°C	kWh/100 kg	kWh/24h	l/h	W
EF 124 AS	Air	230/50/1	120	112	92	14.4	13.0	4.0	600
EF 124 WS	Water	230/50/1	120	114	94	12.7	12.0	29.8	500

(\*) Data refer to 32°C Amb. / 21°C Water temperature conditions