


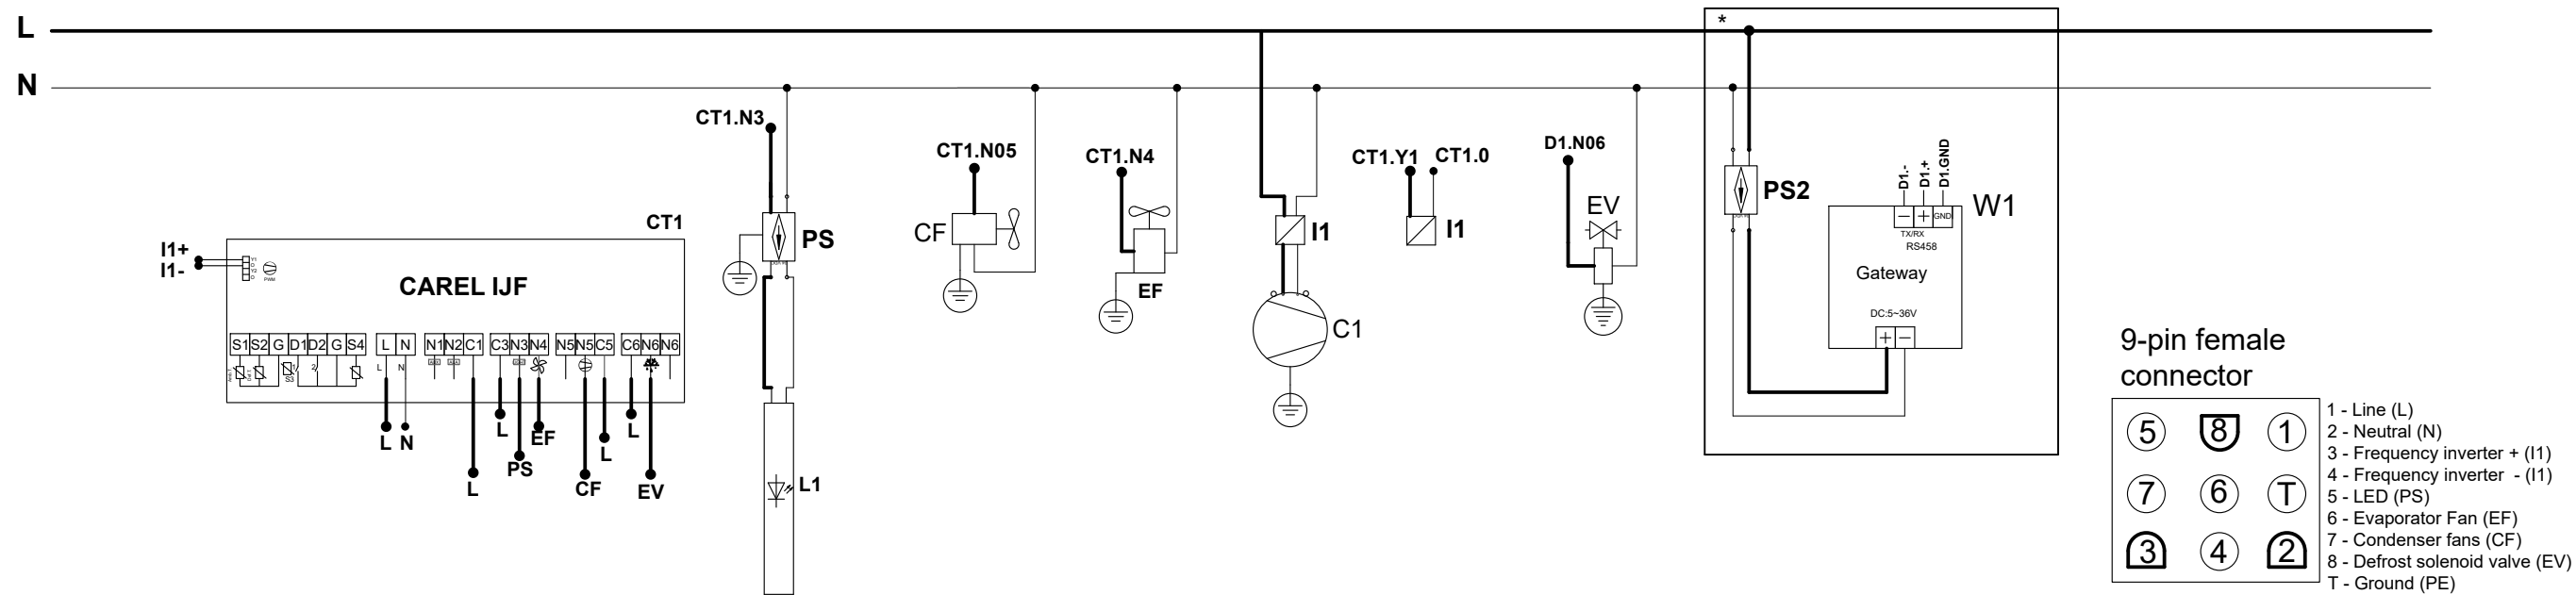

- 9-pin female connector
- | | | |
|---|---|---|
| 5 | 8 | 1 |
| 7 | 6 | T |
| 3 | 4 | 2 |
- 1 - Line (L)
 - 2 - Neutral (N)
 - 3 - Frequency inverter + (I1)
 - 4 - Frequency inverter - (I1)
 - 5 - LED (PS)
 - 6 - Evaporator Fan (EF)
 - 7 - Condenser fans (CF)
 - 8 - Defrost solenoid valve (EV)
 - T - Ground (PE)

- 3-pin female connector
- | | | |
|---|---|---|
| 1 | 2 | 3 |
|---|---|---|
- 1 - Line (L)
 - 2 - Ground (PE)
 - 3 - Neutral (N)

- 2-pin female connector
- | | |
|---|---|
| 1 | 2 |
|---|---|
- 1 - Frequency inverter + (I1)
 - 2 - Frequency inverter - (I1)

CT - Carel Temperature IJF PS - LED Power Supply 24VDC CF- Condenser Fans * - Optional Compressor- 1.5mm

B1 - Room Temperature Probe L1 - LED Lamp EF - Evaporator Fans *PS2 - Gateway power Supply 24VDC

B2 - Defrost Probe C - Compressor *W1 - Carel WIFI Gateway

EV - Hot Gas Defrost Solenoid Valve I - Frequency Inverter