



## Modular Cooking Range Line 700XP 4-Hot Plates Electric Boiling Top Range

ITEM # \_\_\_\_\_  
MODEL # \_\_\_\_\_  
NAME # \_\_\_\_\_  
SIS # \_\_\_\_\_  
AIA # \_\_\_\_\_



371015 (E7ECEH4R00) 4-Hot Plate (2,6 kW each)  
electric Boiling Top  
371127 (E7ECEH4R0N) 4-Hot Plate (2,6 kW each)  
electric Boiling Top

### Short Form Specification

#### Item No. \_\_\_\_\_

To be installed on open base installations, bridging supports or cantilever systems. Four 2.6 kW cast-iron hot plates hermetically sealed to the one-piece top. Exterior panels in stainless steel with Scotch Brite finish. One piece pressed work top in 1.5 mm thick stainless steel. Right-angled side edges to allow flush-fitting junction between units.

### Main Features

- Unit to be mounted on open base cupboards, bridging supports or cantilever systems.
- The four 2.6kW cast-iron plates are hermetically sealed to the one-piece top.
- The special design of the control knob system guarantees against water infiltration.
- IPx4 water protection.
- Suitable for countertop installation.

### Construction

- All exterior panels in Stainless Steel with Scotch Brite finishing.
- One piece pressed 1.5 mm work top in Stainless steel.
- Model has right-angled side edges to allow flush fitting joints between units, eliminating gaps and possible dirt traps.


### Optional Accessories

- Junction sealing kit PNC 206086 ☐
- Support for bridge type installation, 800mm PNC 206137 ☐
- Support for bridge type installation, 1000mm PNC 206138 ☐
- Support for bridge type installation, 1200mm PNC 206139 ☐
- Support for bridge type installation, 1400mm PNC 206140 ☐
- Support for bridge type installation, 1600mm PNC 206141 ☐
- Water column with swivel arm (water column extension not included) PNC 206289 ☐
- Water column extension for 700 line PNC 206291 ☐
- Chimney upstand, 800mm PNC 206304 ☐
- Right and left side handrails PNC 206307 ☐
- Back handrail 800 mm PNC 206308 ☐
- Chimney grid net, 400mm (700XP/900) PNC 206400 ☐
- Frontal handrail, 800mm PNC 216047 ☐
- Frontal handrail, 1200mm PNC 216049 ☐
- Frontal handrail, 1600mm PNC 216050 ☐
- Large handrail - portioning shelf, 800mm PNC 216186 ☐
- 2 side covering panels for top appliances PNC 216277 ☐
- Basket for 7lt top and free standing fryers (only for 371015) PNC 921608 ☐

APPROVAL: \_\_\_\_\_



Experience the Excellence  
[www.electroluxprofessional.com](http://www.electroluxprofessional.com)

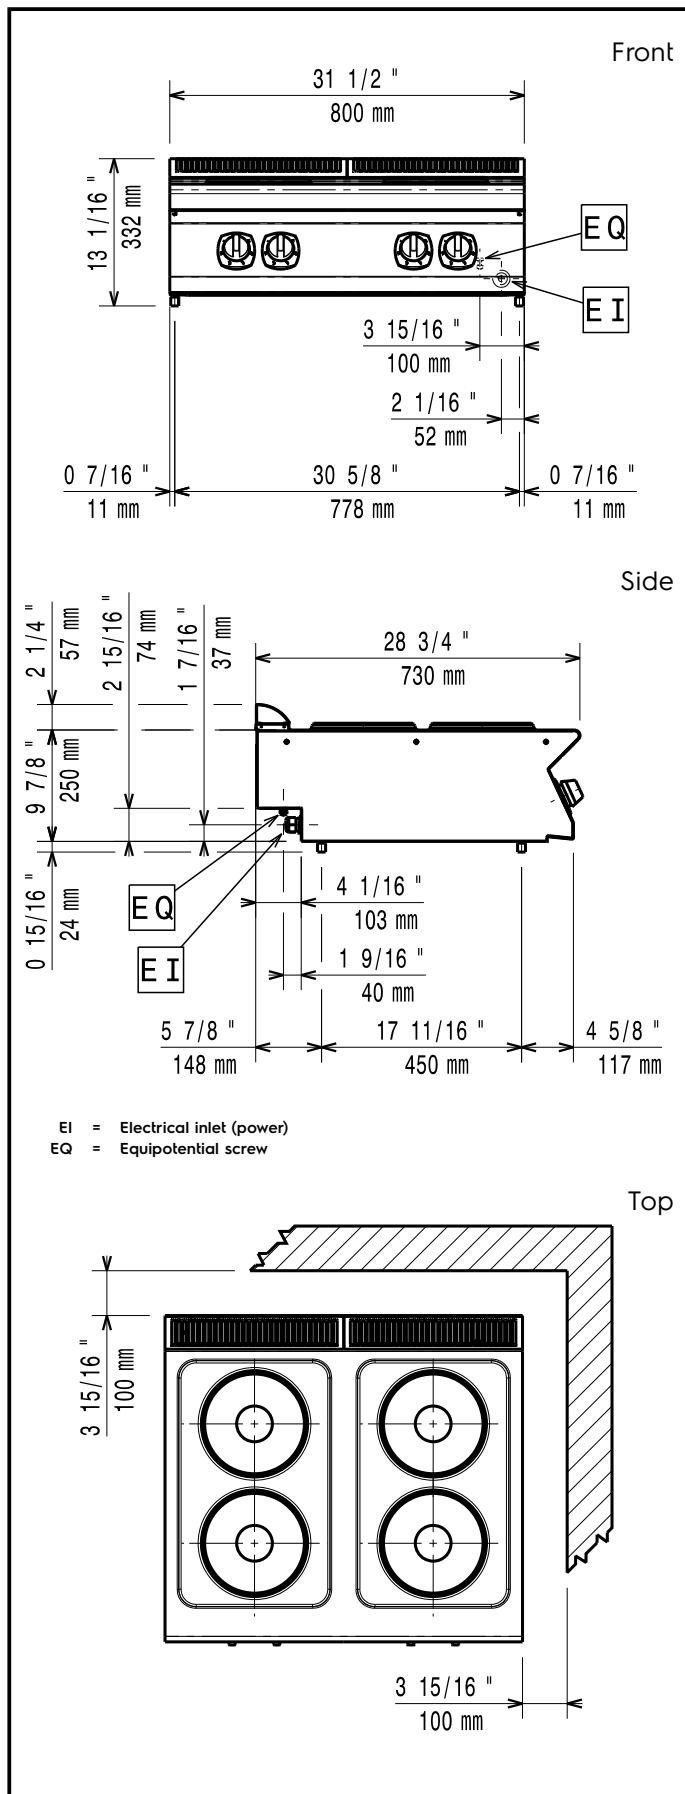

### Electric

#### Supply voltage:

371015 (E7ECEH4R00)

380-400 V/3 ph/50/60 Hz

371127 (E7ECEH4R0N)

230 V/3 ph/50/60 Hz

#### Total Watts:

10.4 kW

#### Predisposed for:

371015 (E7ECEH4R00)

380-400V 3~ 50/60Hz  
9-10,4kW

### Key Information:

#### Front Plates Power:

2.6 - 2.6 kW

#### Back Plates Power:

2.6 - 2.6 kW

#### Front Plates dimensions:

Ø 230 Ø 230

#### Back Plates dimensions:

Ø 230 Ø 230

#### External dimensions, Width:

800 mm

#### External dimensions, Depth:

730 mm

#### External dimensions, Height:

250 mm

#### Net weight:

40 kg

#### Shipping weight:

371015 (E7ECEH4R00)

39 kg

371127 (E7ECEH4R0N)

40 kg

#### Shipping height:

371015 (E7ECEH4R00)

520 mm

371127 (E7ECEH4R0N)

540 mm

#### Shipping width:

820 mm

#### Shipping depth:

860 mm

#### Shipping volume:

371015 (E7ECEH4R00)

0.37 m<sup>3</sup>

371127 (E7ECEH4R0N)

0.38 m<sup>3</sup>

#### Certification group:

371015 (E7ECEH4R00)

EH74T

371127 (E7ECEH4R0N)

N7CE1

If appliance is set up or next to or against temperature sensitive furniture or similar, a safety gap of approximately 150 mm should be maintained or some form of heat insulation fitted.