



**Electrolux**

## Modular Cooking Range Line 700XP 6-Burner Gas Range on Electric Oven with Cupboard

ITEM # \_\_\_\_\_

MODEL # \_\_\_\_\_

NAME # \_\_\_\_\_

SIS # \_\_\_\_\_

AIA # \_\_\_\_\_



**Electrolux**

700XP 6-Burner Gas Range on Electric Oven with Cupboard  
Modular Cooking Range Line



### Modular Cooking Range Line

### 700XP 6-Burner Gas Range on Electric Oven with Cupboard

**371006 (E7GCGL6C20)** 6-burner (5,5 kW each) gas  
range on electric oven (6 kW)  
and cupboard

### Short Form Specification

#### Item No.

To be installed on stainless steel feet with height adjustment up to 50 mm. High efficiency flower flame burners with flame regulator and protected pilot light. Flame failure device as standard on burners to protect against accidental extinguishing. Stainless steel oven chamber with 3 levels of runners to accommodate 2/1 GN shelves (2 steam pans). Ribbed oven base plate. Exterior panels of unit in stainless steel with Scotch Brite finish. Pan supports in heavy duty cast iron. One piece pressed work top in 1.5 mm thick stainless steel. Right-angled side edges to allow flush-fitting junction between units.

### Main Features

- Unit to have stainless steel feet with height adjustment up to 50 mm.
- The six 5.5 kW high efficiency flower flame burners allow the flame to adapt to different size pans.
- Cupboard compartment for storage of pots, pans, sheet pans etc.
- Gas appliance supplied for use with natural or LPG gas, conversion jets supplied as standard.
- Large sized pan support in cast iron (stainless steel as option) with long center fins to allow the use of the largest down to the smallest pans.
- Pan supports in cast iron are washable in a dishwasher.
- Burners to feature flame regulator.
- Flame failure device on each burner protects against gas leakage when accidental extinguishing of the flame occurs.
- Protected pilot light.
- Base compartment consists of an electric standard oven positioned beneath the base plate. Stainless steel oven chamber to have 3 levels of runners to accommodate 2/1 GN shelves (2 steam pans) and ribbed enamelled steel base plate.
- Ribbed oven base plate.
- Oven thermostat adjustable from 140 °C to 300 °C.
- Double skinned door with pressed internal panel for heat insulation.
- IPX 4 water protection.

### Construction

- All exterior panels in Stainless Steel with Scotch Brite finishing.
- One piece pressed 1.5 mm work top in Stainless steel.
- Model has right-angled side edges to allow flush fitting joints between units, eliminating gaps and possible dirt traps.

### Included Accessories

- 1 of GN2/1 chrome grid for static oven PNC 164250
- 1 of Door for open base cupboard PNC 206350

### Optional Accessories

- GN2/1 chrome grid for static oven PNC 164250
- Draught diverter with 150mm diameter PNC 206132
- Matching ring for flue condenser PNC 206133
- 4 wheels, 2 swivelling with brake PNC 206135 (700/900XP). It is mandatory to install with base supports for feet/wheels.

APPROVAL: \_\_\_\_\_



**Electrolux**

## Modular Cooking Range Line 700XP 6-Burner Gas Range on Electric Oven with Cupboard

- Flanged feet kit PNC 206136
- Frontal kicking strip for concrete installation, 200mm PNC 206146
- Frontal kicking strip for concrete installation, 400mm PNC 206147
- Frontal kicking strip for concrete installation, 800mm PNC 206148
- Frontal kicking strip for concrete installation, 1000mm PNC 206150
- Frontal kicking strip for concrete installation, 1200mm PNC 206151
- Frontal kicking strip for concrete installation, 1600mm PNC 206152
- Frontal kicking strip, 200mm (not for refr-freezer base) PNC 206174
- Frontal kicking strip, 400mm (not for refr-freezer base) PNC 206175
- Frontal kicking strip, 800mm (not for refr-freezer base) PNC 206176
- Frontal kicking strip, 1000mm (not for refr-freezer base) PNC 206177
- Frontal kicking strip, 1200mm (not for refr-freezer base) PNC 206178
- Frontal kicking strip, 1600mm (not for refr-freezer base) PNC 206179
- 4 feet for concrete installation PNC 206210
- 2 supports with side runners for 4 1/1 GN containers for open base cupboards. 1 set required per 400mm module. PNC 206244
- Flue condenser for 1 module, 150 mm diameter PNC 206246
- Pair of side kicking strips PNC 206249
- Electric heating kit for cupboards. 1 required per 400mm module. PNC 206259
- Single burner smooth plate for direct cooking - fits frontal burners only PNC 206260
- Single burner ribbed plate for direct cooking- fits frontal burners only PNC 206261
- Single burner radiant plate for pan support PNC 206264
- Pair of side kicking strips for concrete installation PNC 206265
- Water column with swivel arm (water column extension not included) PNC 206289
- Water column extension for 700 line PNC 206291
- Stainless steel double grid for 2 burners PNC 206297
- Chimney upstand, 1200mm PNC 206306
- Right and left side handrails PNC 206307
- Door for open base cupboard PNC 206350
- Wok pan support for open burners (700/900) PNC 206363
- Base support for feet or wheels - 400mm (700/900XP) PNC 206366
- Base support for feet or wheels - 800mm (700/900) PNC 206367
- Base support for feet or wheels - 1200mm (700/900) PNC 206368
- Base support for feet or wheels - 1600mm (700/900) PNC 206369
- Base support for feet or wheels - 2000mm (700/900) PNC 206370
- Rear paneling - 1200mm (700/900) PNC 206376
- KIT TOWN GAS NOZZLES (G150)-COOKERS 700 PNC 206387
- 2 side covering panels, h=700mm, d=700mm PNC 216000
- Frontal handrail 1200mm PNC 216049
- Frontal handrail 1600mm PNC 216050
- Large handrail - portioning shelf, 400mm PNC 216185
- Large handrail - portioning shelf, 800mm PNC 216186
- Double burner smooth plate for direct cooking PNC 921684
- Double burner ribbed plate for direct cooking PNC 921685




**Modular Cooking Range Line  
700XP 6-Burner Gas Range on Electric Oven with Cupboard**

The company reserves the right to make modifications to the products without prior notice. All information correct at time of printing.



Electrolux

# Modular Cooking Range Line 700XP 6-Burner Gas Range on Electric Oven with Cupboard

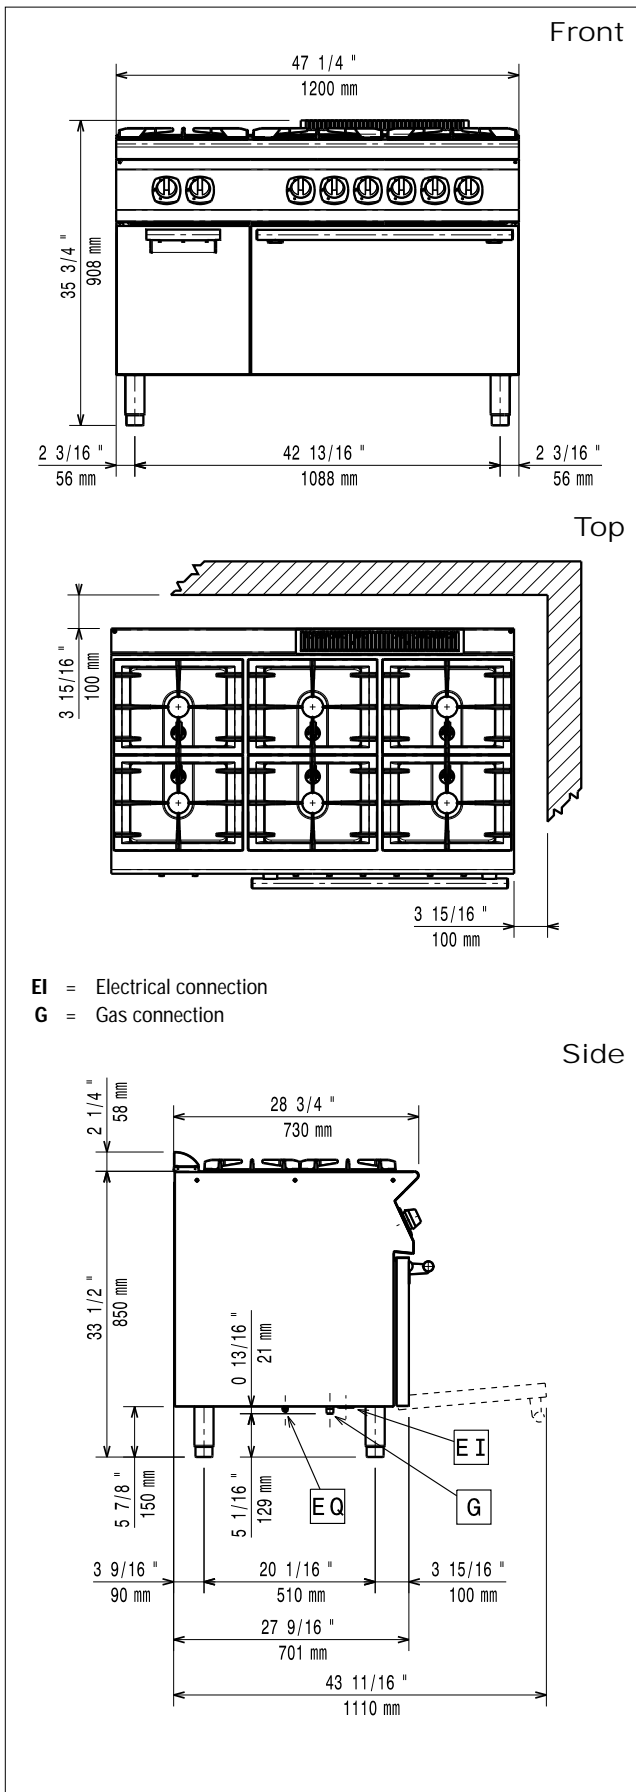

## Electric

### Supply voltage:

371006 (E7GCGL6C20) 400 V/3N ph/50/60 Hz

### Connected load:

6 kW

### Total Watts:

6 kW

### Oven Heat Input:

6 kW

## Gas

### Gas Power:

112497 Btu/hr (33 kW)

### Gas Type Option:

LPG;Town

### Gas Inlet:

1/2"

### Natural gas - Pressure:

7" w.c. (17.4 mbar)

### LPG Gas Pressure:

11" w.c. (27.7 mbar)

## Key Information

### Front Burners Power

5.5 - 5.5 kW

### Back Burners Power

5.5 - 5.5 kW

### Middle Burners Power:

5.5 - 0/5.5 - 0 kW

### Back Burners Dimension - mm

Ø 60 Ø 60

### Front Burners Dimension - mm

Ø 60 Ø 60

### Middle Burners Dimension - mm

Ø 60 Ø 60

### Oven working Temperature:

140 °C MIN; 300 °C MAX

### Oven Cavity Dimensions (width):

540 mm

### Oven Cavity Dimensions (height):

300 mm

### Oven Cavity Dimensions (depth):

650 mm

### Storage Cavity Dimensions

#### (width):

330 mm

### Storage Cavity Dimensions

#### (height):

380 mm

### Storage Cavity Dimensions

#### (depth):

640 mm

### Net weight:

120 kg

### Shipping weight:

135 kg

### Shipping height:

1140 mm

### Shipping width:

820 mm

### Shipping depth:

1300 mm

### Shipping volume:

1.22 m<sup>3</sup>

If appliance is set up or next to or against temperature sensitive furniture or similar, a safety gap of approximately 150 mm should be maintained or some form of heat insulation fitted.



## Modular Cooking Range Line 700XP 6-Burner Gas Range on Electric Oven with Cupboard

The company reserves the right to make modifications to the products without prior notice. All information correct at time of printing.