



**Electrolux**

Modular Cooking Range Line  
900XP One Well Electric Fryer  
23 liter

**ITEM #**  
**MODEL #**  
**NAME #**  
**SIS #**  
**AIA #**



Modular Cooking Range Line  
900XP One Well Electric Fryer 23 liter

**391089 (E9FRED1JF0)**

23-lt electric fryer with 1 "V" shaped well (external heating elements) and 2 half size baskets

**Short Form Specification**

**Item No.**

High efficiency infrared heating elements (18kW) attached to the outside of the well. Deep drawn V-Shaped well. Oil drains through a tap into a container positioned under the well. Height adjustable feet in stainless steel. Exterior panels in stainless steel. Worktop in 20/10, stainless steel. Right-angled side edges eliminate gaps and possible dirt traps between units.

**Main Features**

- Deep drawn V-Shaped well.
- External infrared heating elements for ease of cleaning of internal well.
- Thermostatic regulation of oil temperature up to a maximum of 185 °C.
- Overheat protection thermostat as standard on all units.
- Oil drains through a tap into a drainage container positioned under the well.
- All major compartments located in front of unit for ease of maintenance.
- IPX5 water resistance certification.
- The special design of the control knob system guarantees against water infiltration.
- External panels in Stainless Steel with Scotch Brite finish.
- Unit delivered with four 50 mm legs in stainless steel as standard (all round Stainless steel kick plates as option).
- Supplied as standard with 2 half size baskets and 1 right side door for cupboard.

**Construction**

- Unit is 930 mm deep to give a larger working surface area.
- Model has right-angled side edges to allow flush fitting joints between units, eliminating gaps and possible dirt traps.
- Interior of well with rounded corners for ease of cleaning.

**Included Accessories**

- 1 of Door for open base cupboard PNC 206350
- 1 of 2 half size baskets for 18/23lt well PNC 927223 fryers

**Optional Accessories**

• Junction sealing kit	PNC 206086
• 4 wheels, 2 swivelling with brake (700/900XP). It is mandatory to install with base supports for feet/wheels.	PNC 206135
• Flanged feet kit	PNC 206136
• Sediment tray for 23 lt fryers	PNC 206173
• Pair of side kicking strips (not for refr-freezer base)	PNC 206180
• Hygienic lid for 23lt fryers	PNC 206201
• Frontal kicking strip for 23lt fryers in two parts	PNC 206203

**APPROVAL:**

  
**Electrolux**

Modular Cooking Range Line  
900XP One Well Electric Fryer 23 liter



**Electrolux**

**Modular Cooking Range Line  
900XP One Well Electric Fryer  
23 liter**

- Extension pipe for oil drainage for 15lt, 18lt, 23lt fryers PNC 206209
- Water column with swivel arm (water column extension not included) PNC 206289
- Chimney upstand, 400mm PNC 206303
- Door for open base cupboard PNC 206350
- Filter for fryer oil collection basin for 15lt, 18lt, 23lt free standing fryers PNC 206359
- Base support for wheels (lateral) for 23lt fryers and pastacookers (900) PNC 206372
- Side handrail-right/left hand PNC 216044
- Frontal handrail 400mm PNC 216046
- Frontal handrail 800mm PNC 216047
- Frontal handrail 1200mm PNC 216049
- Frontal handrail 1600mm PNC 216050
- 2 side covering panels for free standing appliances PNC 216134
- Large handrail - portioning shelf, 400mm PNC 216185
- Large handrail - portioning shelf, 800mm PNC 216186
- 2 half size baskets for 18/23lt well fryers PNC 927223
- 1 full size basket for 18/23lt well fryers PNC 927226
- Unclogging rod for HD fryers drainage pipe PNC 927227
- Oil life saver for 23lt fryers PNC 960645



**Modular Cooking Range Line  
900XP One Well Electric Fryer 23 liter**


The company reserves the right to make modifications to the products without prior notice. All information correct at time of printing.

2014.06.26




Electrolux

# Modular Cooking Range Line 900XP One Well Electric Fryer 23 liter

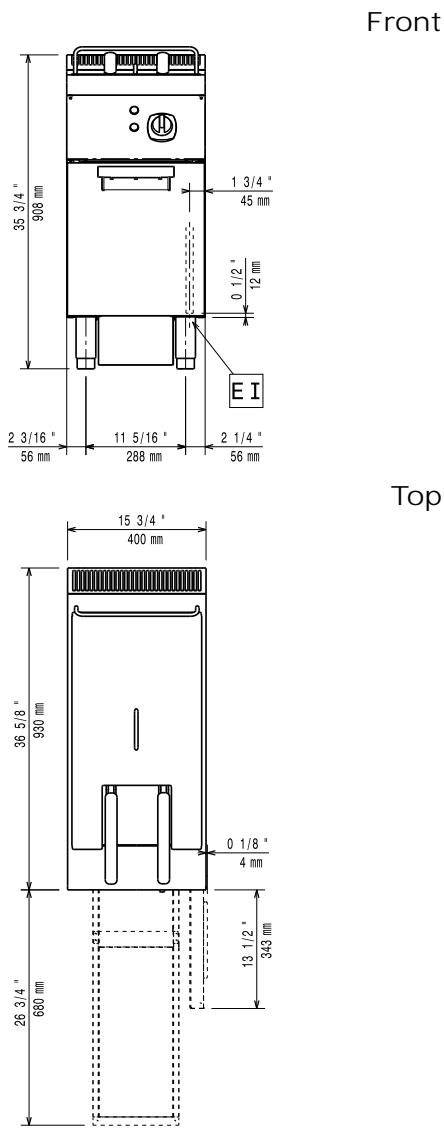

**EI** = Electrical connection

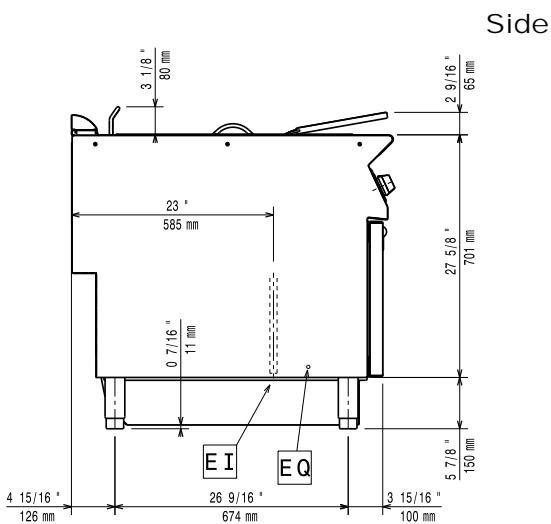

## Electric

### Supply voltage:

391089 (E9FRED1JF0)

400 V/3N ph/50/60 Hz

### Total Watts:

18 kW

## Key Information

**Usable well dimensions (width):** 340 mm

**Usable well dimensions (height):** 575 mm

**Usable well dimensions (depth):** 400 mm

**Well capacity:**

21 lt MIN; 23 lt MAX

**Thermostat Range:**

105 °C MIN; 185 °C MAX

**Net weight:**

57 kg

**Shipping weight:**

70 kg

**Shipping height:**

1080 mm

**Shipping width:**

460 mm

**Shipping depth:**

1020 mm

**Shipping volume:**

0.51 m<sup>3</sup>

If appliance is set up or next to or against temperature sensitive furniture or similar, a safety gap of approximately 150 mm should be maintained or some form of heat insulation fitted.



Modular Cooking Range Line  
900XP One Well Electric Fryer 23 liter

The company reserves the right to make modifications to the products without prior notice. All information correct at time of printing.

2014.06.26