



**Electrolux**

## Modular Cooking Range Line 900XP Electric Bain Marie Top half module

ITEM # \_\_\_\_\_

MODEL # \_\_\_\_\_

NAME # \_\_\_\_\_

SIS # \_\_\_\_\_

AIA # \_\_\_\_\_



**Electrolux**



Modular Cooking Range Line  
900XP Electric Bain Marie Top half  
module

**391124 (E9BMEDB000)** Half module electric bain-  
marie top

### Short Form Specification

**Item No.** \_\_\_\_\_

Incoloy armoured heating elements positioned under the base of the well. Used to keep cooked food at serving temperature using hot water inside the well. Water temperature to be controlled by thermostat with maximum temperature of 90 °C. Exterior panels of unit in stainless steel with Scotch Brite finish. Extra strength work top in heavy duty 2 mm stainless steel. Right-angled side edges to allow flush-fitting junction between units.

### Main Features

- Bain Marie used for keeping cooked food at serving temperatures using hot water.
- Incoloy armoured heating elements positioned under the base of the well.
- Knob switch.
- Water basin is seamlessly welded into the top of the appliance.
- Filling water level is plate-marked on the side of the well.
- Unit to feature manual refill of well.
- Water temperature controlled by thermostat with maximum temperature value of 90 °C.
- Basin drained by drain valve with overflow.
- Special insulation beneath cooking surface keeps heat on the plate without dispersion to the base.
- Unit to have perforated false bottom and runner support for GN containers.
- All major compartments located in front of unit for ease of maintenance.
- The special design of the control knob system guarantees against water infiltration.
- IPX5 water protection.

### Construction

- Unit is 930 mm deep to give a larger working surface area.
- All exterior panels in Stainless Steel with Scotch Brite finishing.
- AISI 304 stainless steel worktop, 2mm thick.
- Model has right-angled side edges to allow flush fitting joints between units, eliminating gaps and possible dirt traps.

### Optional Accessories

- Junction sealing kit  PNC 206086
- 4 wheels, 2 swivelling with brake  PNC 206135  
(700/900XP). It is mandatory to install with base supports for feet/wheels.
- Support for bridge type system, 800mm  PNC 206137
- Support for bridge type system, 1000mm  PNC 206138
- Support for bridge type system, 1200mm  PNC 206139
- Support for bridge type system, 1400mm  PNC 206140
- Support for bridge type system, 1600mm  PNC 206141
- Support for bridge type system, 400mm  PNC 206154

**APPROVAL:** \_\_\_\_\_



**Electrolux**

## Modular Cooking Range Line 900XP Electric Bain Marie Top half module

- Water column with swivel arm (water column extension not included) PNC 206289
- Water column extension for 900 line PNC 206290
- Chimney upstand, 400mm PNC 206303
- Base support for feet or wheels - 400mm (700/900XP) PNC 206366
- Side handrail-right/left hand PNC 216044
- Frontal handrail 400mm PNC 216046
- Frontal handrail 800mm PNC 216047
- Frontal handrail 1200mm PNC 216049
- Frontal handrail 1600mm PNC 216050
- Large handrail - portioning shelf, 400mm PNC 216185
- Large handrail - portioning shelf, 800mm PNC 216186
- 2 side covering panels for top, d=900mm PNC 216278



**Modular Cooking Range Line  
900XP Electric Bain Marie Top half module**

The company reserves the right to make modifications to the products without prior notice. All information correct at time of printing.


2014.06.23




Electrolux

# Modular Cooking Range Line 900XP Electric Bain Marie Top half module

Front




Top

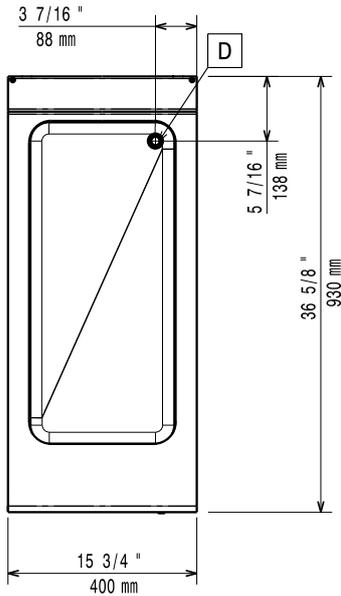

**D** = Drain  
**EI** = Electrical connection

Side

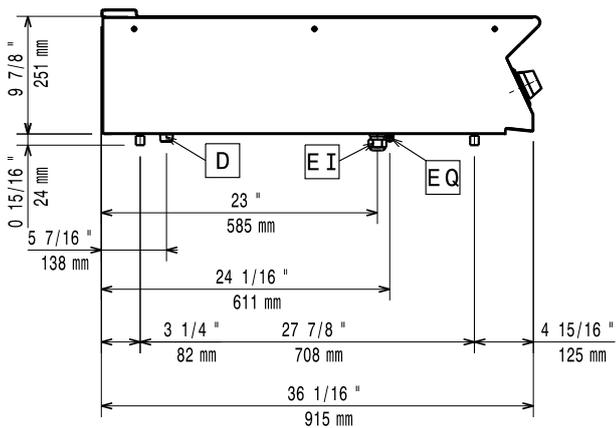

## Electric

### Supply voltage:

**391124 (E9BMEDB000)** 230 V/1N ph/50/60 Hz

### Total Watts:

2.2 kW

## Water

### Water Drain:

50 mm

## Key Information

**Usable well dimensions (width):** 305 mm

**Usable well dimensions (height):** 160 mm

**Usable well dimensions (depth):** 685 mm

**Thermostat Range:** 30 °C MIN; 90 °C MAX

**Net weight:** 32 kg

**Shipping weight:** 35 kg

**Shipping height:** 540 mm

**Shipping width:** 460 mm

**Shipping depth:** 1020 mm

**Shipping volume:** 0.25 m<sup>3</sup>

If appliance is set up or next to or against temperature sensitive furniture or similar, a safety gap of approximately 150 mm should be maintained or some form of heat insulation fitted.



**Modular Cooking Range Line  
900XP Electric Bain Marie Top half module**

The company reserves the right to make modifications to the products without prior notice. All information correct at time of printing.