

Product Code: EP1440L 10–218 EcoPro G2 1350 Litre Upright Marine Spec Freezer Cabinet



Features & Benefits

- Sleek, modern asthetics, robust construction and market leading capacity. 'Smartphone style' fuzzy logic II touch sensitive control panel with high visibility temperature display
- · Low energy refrigerant system with reduced running costs
- Improved internal fittings for easy cleaning
- Foster Circulair II air distribution system maximises efficient operation even when shelves are fully loaded
- Operates efficiently in ambients up to 32°C
- Includes legs, bulkhead brackets, marine shelves and latch handle
- Features Foster's new award-winning +stayclear condenser, revolutionising the effective operation of your refrigeration, ensuring your equipment works more efficiently for longer

External Finish		
304 s/s	Standard	
304 S/S back for island sitting	Option	
Base Fittings		
Castors 80mm	Standard	
Legs 150mm	Option	
Electrical, Service & Ecodesign Data		
	odesign	
	odesign Standard	
Data		
Data 230/50/1	Standard	
Data 230/50/1 220/60/1 Electrical Supply	Standard Option	
Data 230/50/1 220/60/1 Electrical Supply Fuse Required	Standard Option 13	

Internal Finish

304 s/sStandardDoorsMarineMarineStandardProduct ExtrasOption

Standard

Shelving

Additional S/S Trayslides	Option
Additional GN2/1 Shelf	Option

Refrigeration

R134a - Industry Standard	Standard
Integral Refrigeration System	Standard
Less Condensing Unit	Option
Remote Refrigeration System	Option

Specification

Dimensions (Width)	1440
Dimensions (Height)	2123
Dimensions (Depth)	820
Weight (Unpacked, kg)	182.5
Weight (Packed, kg)	199.1
Gross Volume	1350
Noise Dba @ 1M	71.2


Footnotes

• Marine kit option includes legs, bulkhead brackets, marine shelves and latch handle

Marine Spec

- 150mm castors are not available if product is supplied less condensing unit
- Adequate airflow and service space must be kept above the top of cabinet: 310mm
- Depth with door open is 1500mm
- Decibel rating measured 1m high from the floor and 1m out from the cabinet

Energy Performance Data and information

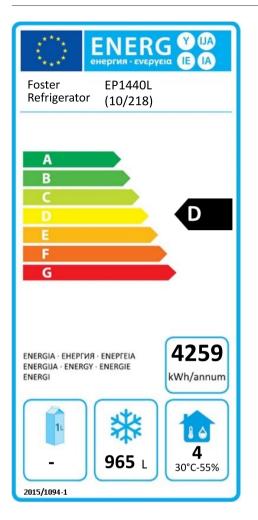

Application

This appliance is intended for use in ambient temperatures up to 40°C **Safety**

Precautionary instructions and maintenance advice, to ensure efficient operation, can be found in this products operating instructions.

Recycling

For recycling and end of life care for this product, please refer to environmental section of the website or visit our policies



Foster Refrigerator, Oldmedow Road, King's Lynn, Norfolk, PE30 4JU Phone 08432 168800 | Email sales@foster-uk.com | Visit www.fosterrefrigerator.com