

Product Code: EP700L 10–163

EcoPro G2 600 Litre Upright Marine Spec Freezer Cabinet




Features & Benefits

- Includes legs, bulkhead brackets, marine shelves and latch handle
- All new thicker and more robust cabinet design with advanced thermal efficiency and market leading capacity making your money go further
- New 'smartphone style' touch sensitive hidden-until-lit control panel with unique high visibility temperature display combines sophistication with functionality
- All-new ergonomic door and handle design for ease of opening and cleaning
- Designed using high technology: 'Fluid Food-Fresh Dynamics' modelling, the new and improved advanced Foster Circulair II air distribution system maximises efficient operation even when shelves are fully loaded
- Brand-new refrigeration system designed to be the most technologically advanced and energy efficient yet
- Features Foster's new award-winning +stayclear condenser, revolutionising the effective operation of your refrigeration, ensuring your equipment works more efficiently for longer

External Finish		Internal Finish		Shelving	
304 s/s	Standard	304 s/s	Standard	Additional S/S Trayslides	Option
304 S/S back for island sittin	g Option	Doors		Additional GN2/1 Shelf	Option
Base Fittings		Marine	Standard	Refrigeration	
Castors 80mm	Standard	Left Hand Hinged Door	Option	R404a - Industry Standard	Standard
Electrical, Service & Ed	codesign	Product Extras		Less Condensing Unit	Option
Data		Helicoil Mains Lead	Option	Specification	
230/50/1	Standard		•		
				Dimensions (Width)	700
220/60/1 Electrical Supply	Option			Dimensions (Width) Dimensions (Height)	700 2125
220/60/1 Electrical Supply Fuse Required	Option 13				
	· · · · · · · · · · · · · · · · · · ·			Dimensions (Height)	2125
Fuse Required	13			Dimensions (Height) Dimensions (Depth)	2125 820
Fuse Required Global Warming Potential	13			Dimensions (Height) Dimensions (Depth) Weight (Unpacked, kg)	2125 820 121

Footnotes

- Marine kit option includes legs, bulkhead brackets, marine shelves and latch handle
- 150mm castors are not available if product is supplied less condensing unit
- Adequate airflow and service space must be kept above the top of cabinet: 310mm
- Depth with door open is 1500mm
- Decibel rating measured 1m high from the floor and 1m out from the cabinet

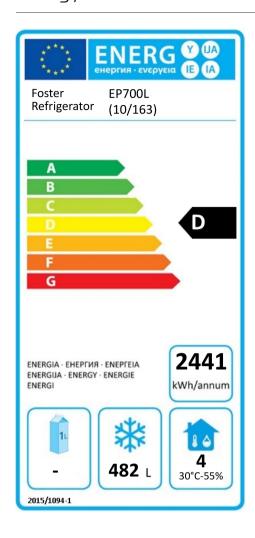

Application

This appliance is intended for use in ambient temperatures up to 40°C **Safety**

Precautionary instructions and maintenance advice, to ensure efficient operation, can be found in this products operating instructions.

Recycling

For recycling and end of life care for this product, please refer to environmental section of the website or visit our policies











