

## Seal Food Display Bars

### Key Features

- Type: Refrigerated counter-top unit
- Side-mounted refrigeration module (left side)
- R134a refrigerant
- Thermostatic temperature control with digital display
- Well temperature -1° to +2°C
- Fan cooled condenser
- Nitrile rubber feet
- GN capacity 1/3 x 100mm
- Meets the performance requirements of BS EN ISO 23953-2:2005 Climate Class 3M2



FDB5 with BSG5

### Construction

- Body: stainless steel 430 grade
- Internal: stainless steel 304 grade
- Glazing: toughened safety glass (see accessories)

### Available Options




- Choice of five widths

### Available Accessories


- Back service glass
- Self service glass
- Stainless steel lid
- Wall brackets

## Specifications


Model	FDB4	FDB5	FDB6	FDB8	FDB10
External height (mm)	245				
External width (mm)	1045	1222	1399	1753	2107
External depth (mm)	375				
Well temperature (°C)	-1 °C – 2 °C				
Food holding temperature(°C)	3 °C – 7 °C				
Maximum ambient temperature (°C)	25 °C				
Maximum ambient relative humidity (%)	60%				
Total power rating kW	0.175				
Electrical supply 1N~+E 230V 50-60Hz Current Rating (A)	0.7				
Net weight unpacked (kg)	22	24	26	28	30
Gross weight packed (kg)	26	38	30	35	37
Shipping volume (m <sup>3</sup> )	0.278	0.301	0.355	0.438	0.547

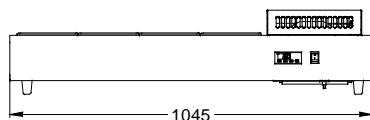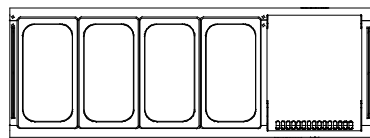


FDB4

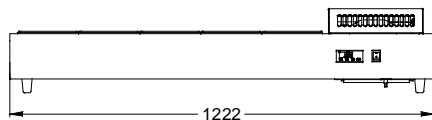


FDB5



FDB6



FDB8



FDB10



**Lincat Limited, Whisby Road,  
Lincoln LN6 3QZ,  
United Kingdom**

UK Sales Tel: 01522 875500 UK Spares Tel: 01522 875510 UK General Tel: 01522 875555  
UK Fax: 01522 875530 International Sales Tel: +44 1522 503250 International Fax: +44 1522 875530  
Website: [www.lincat.co.uk](http://www.lincat.co.uk) UK Sales e-mail: [sales@lincat.co.uk](mailto:sales@lincat.co.uk) International Sales e-mail: [export@lincat.co.uk](mailto:export@lincat.co.uk)



Document ref:  
SEAL-FDB  
Issue date: Dec-09