


Undercounter Dishwasher with Vaporinse and Softener

FPSW-10B

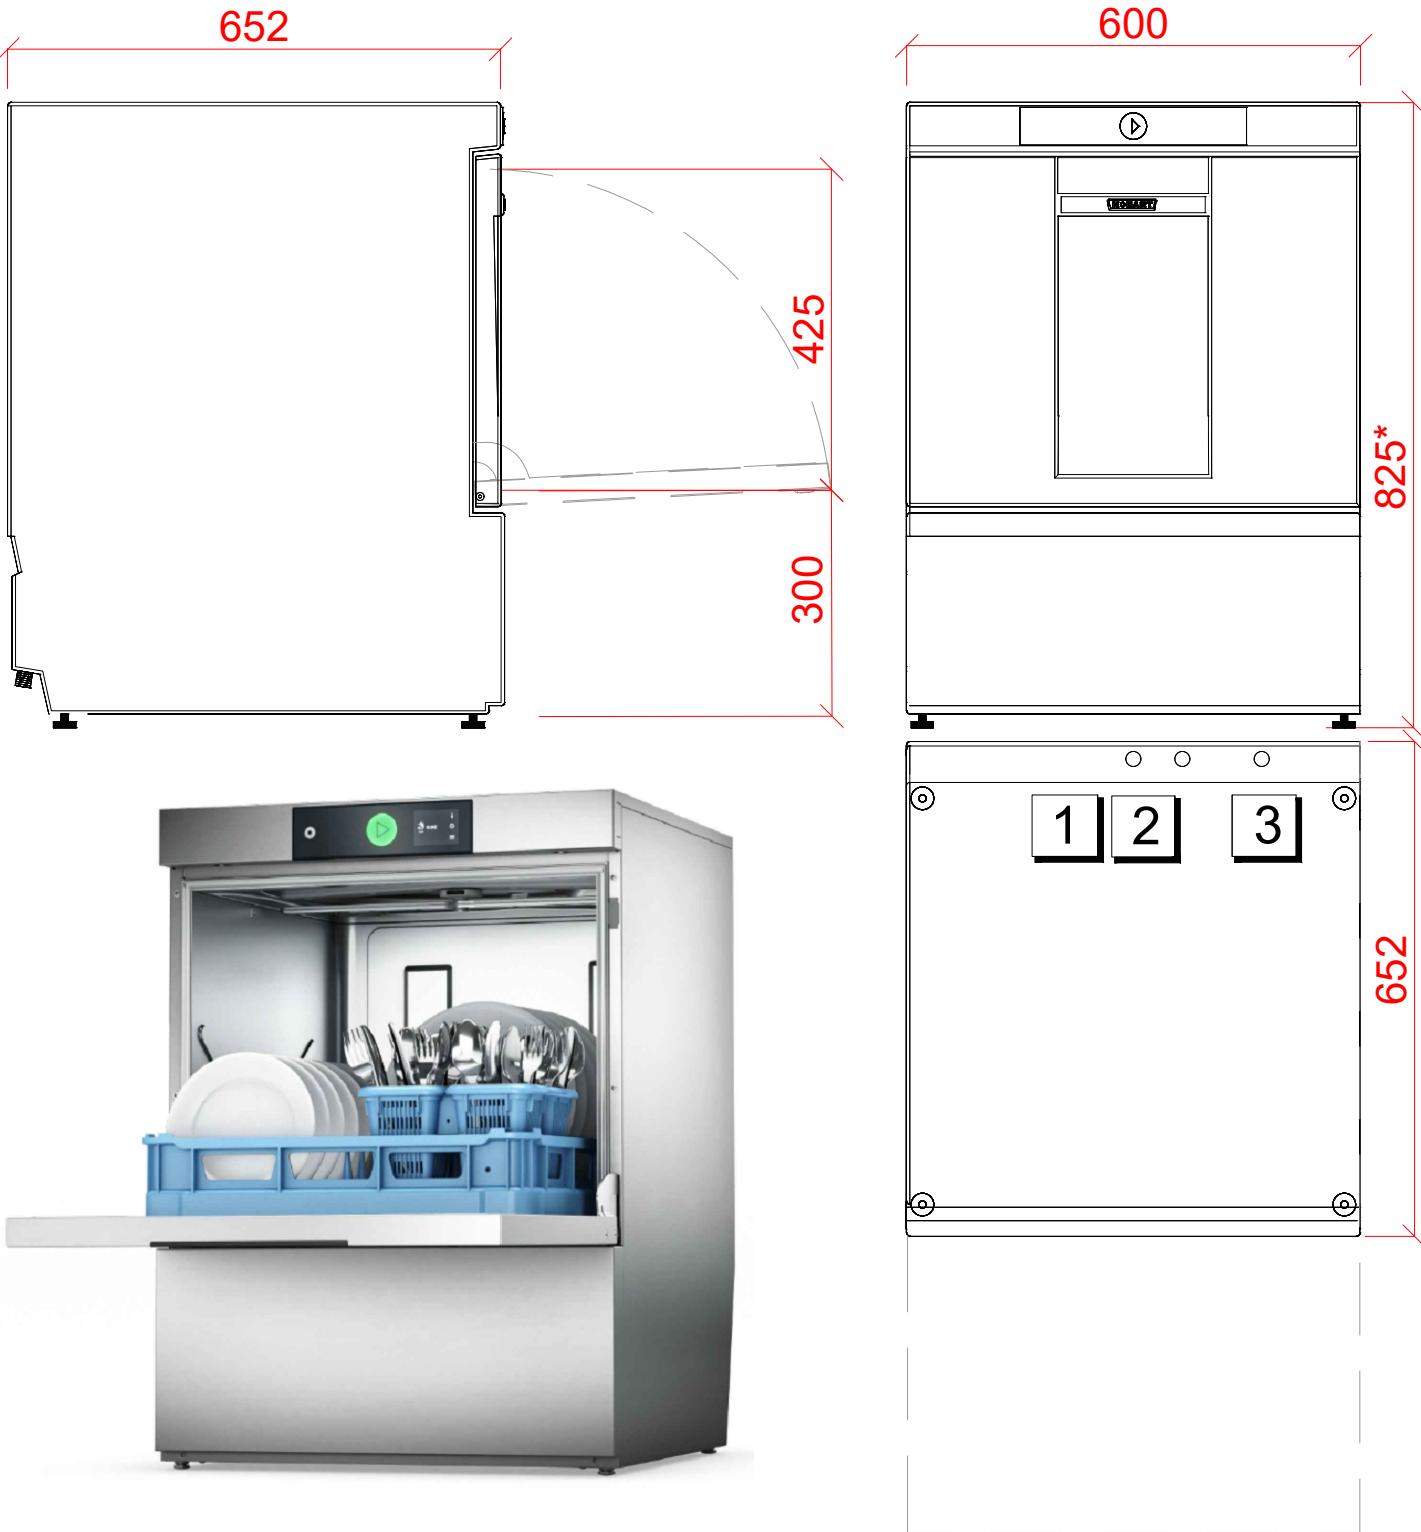

1 Water

22mm CONNECTION VIA 2 METRE FLEXIBLE HOSE,
FEMALE TERMINATION.
WATER SUPPLY 10°C TO 60°C (0° TO 3° CLARK MAX)
@ 0.6 TO 6.0 BAR MAX. INITIAL TANK FILL 10.8 LITRES.
STANDARD RINSE - 45 CYCLES
RINSE WATER USAGE 2.0 LITRES PER CYCLE.
MAX USAGE 90 LITRES PER HOUR.
VAPO RINSE - 21 CYCLES
RINSE WATER USAGE 1.0 LITRES PER CYCLE.
MAX USAGE 45 LITRES PER HOUR.
OUR MACHINES ARE SUPPLIED WITH CLASS 'AA'
AIR GAP AS STANDARD.

2 Drain

DRAIN - 2 METRE FLEXIBLE HOSE TO A 40 mm
TRAPPED STANDPIPE 800mm MAX A.F.F.L.
FLOW RATE 30 LITRES PER MINUTE.

3 Electric

6.8kW 400/50/3 + N + E FUSED AT 3 x 16amps
MACHINE SUPPLIED WITH 2.5 METRES OF CABLE
(3 PHASE).
CONFIGURABLE TO:
4.7kW 230/50/1 FUSED AT 25 amps

Other Services

RINSE AGENT HOSE - 2.5 METRE FLEXIBLE.
DETERGENT HOSE - 2.5 METRE FLEXIBLE.

Notes

APPROX WEIGHTS:
EMPTY: 65kg's WITH WATER: 87kg's
* = + 40mm