
## **GRILL STANDS**

## E & G3512/2522/2512 E & G3532/2532/2502

## STAND KIT ASSEMBLY INSTRUCTIONS E & G3512 / 2522 / 2512

-		
Item	Description	Qty
1.	End assembly	2
2.	Shelf/Back	4
3.	Adjustable foot	4
4.	Top Plate	1
5.	Screw Kit	1
5.1.	M6 x 20mm hex. hd. screw	4
5.2.	M5 x 10mm pan hd. screw	30
5.3.	M6 shakeproof washer	4
5.4.	M6 plain washer	4
5.5.	M5 washer	30
5.6.	M5 shakeproof washer	30
5.7.	M12 locknut	4
5.8.	Fir Tree Button 4.0	30

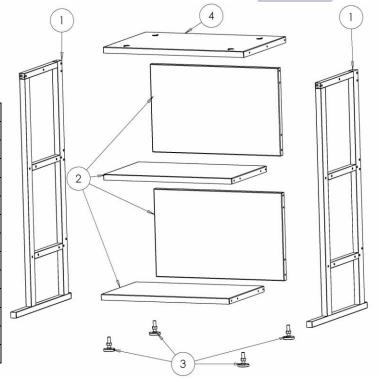

- 1. Screw M12 locking nut (item 5.7) onto adjustable foot (item 3), 4 off, then screw foot fully into base of end assembly frames. Do not tighten locking nuts.
- 2. Lay both end frames on their backs secure back panel (item2), 2 off, to end assembly frames using M5 x 10 screws (item 5.2), 8 off, shakeproof washers (item 5.6), 8 off, and plain washers (item 5.5), 8 off.
- 3. Position shelves (item 2). Attach to end assembly frames using M5 x 10 screws (item 5.2), 16 off, shakeproof washers (item 5.6), 16 off, and plain washers (item 5.5), 16 off.
- 4. Position stand upon feet and adjust feet until unit is level. Tighten locking nuts.
- 5. Position top plate upon frame and secure using M5 x 10 screws (item 5.2), 6 off, shakeproof washers (item 5.6), 6 off, and plain washers (item 5.5), 6 off.
- 6. Carefully place grill upon stand and position grill to match the fixing holes. Secure unit to stand with M6 x 20 screws (item 5.1), shakeproof washer (item 5.3), 4 off, and washers (item 5.4), 4 off. Insert fixings with washers through holes into underside of grill unit.
- 7. Fit Fir Tree button (item 5.8), 30 off, to unused holes.

## **Falcon Foodservice Equipment**


**HEAD OFFICE AND WORKS** 

Wallace View, Hillfoots Road, Stirling. FK9 5PY. Scotland.

SERVICELINE CONTACT

t: 01438 363 000 f: 01438 369 900

T101017 Ref.1

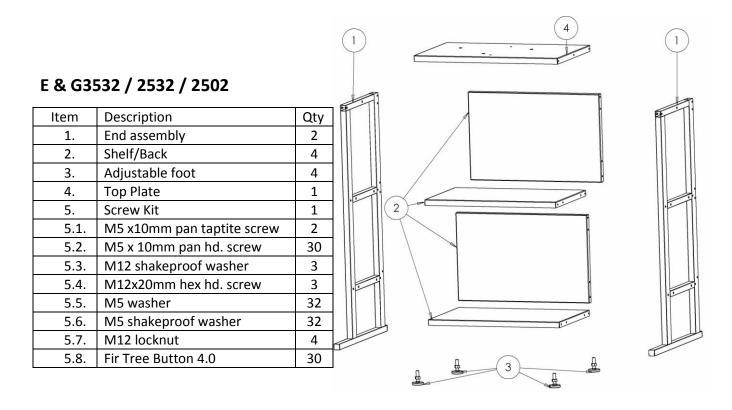

- 1. Screw M12 locking nut (item 5.7) onto adjustable foot (item 3), 4 off, then screw foot fully into base of end assembly frames. Do not tighten locking nuts.
- 2. Lay both end frames on their backs secure back panel (item2), 2 off, to end assembly frames using M5 x 10 screws (item 5.2), 8 off, shakeproof washers (item 5.6), 8 off, and plain washers (item 5.5), 8 off.
- 3. Position shelves (item 2). Attach to end assembly frames using M5 x 10 screws (item 5.2), 16 off, shakeproof washers (item 5.6), 16 off, and plain washers (item 5.5), 16 off.
- 4. Position stand upon feet and adjust feet until unit is level. Tighten locking nuts.
- 5. Position top plate upon frame and secure using M5 x 10 screws (item 5.2), 6 off, shakeproof washers (item 5.6), 6 off, and plain washers (item 5.5), 6 off.
- 6. Carefully place grill upon stand and position grill to match the fixing holes. Secure unit to stand with fixings provided (see units below). Insert fixings with washers through holes into underside of grill unit.
- 7. Fit Fir Tree button (item 5.8), 30 off, to unused holes.

3532 and 2532 units are secured with 2 off - M5 x 10 taptite screws (item 5.1), shakeproof washers (item 5.6) and washers (item 5.5).

2502 units are secured with 3 off - M12 x 20 screws (item 5.4) and shakeproof washers (item 5.3).