

Technical data sheet for

## **GAS TILTING BRATT PAN 900mm**

G580-8, G580-8E

- 80L full stainless steel pan
- Manually operated tilting mechanism
- Optional electric power tilting mechanism
- Heavy-duty lid and hinge system
- Galvanized steel chassis
- Stainless steel exterior
- Easy clean
- Easy service
- Fully modular



G580-8

### **Overall Construction**

- Heavy-duty galvanized steel chassis
- Side panels 1.2mm stainless steel
- Splashback 1.2mm stainless steel
- Front panels 0.9mm stainless steel
- Enamelled pan front cover
- Full stainless steel pan with 2.0mm pan body
- 12mm thick stainless steel even heat pan base
- Large capacity pouring spout
- Heavy-duty spring balanced lid hinge system
- 1.5mm stainless steel lid suitable as bench-top workspace
- Full width stainless steel lid handle
- Manually operated pan lift handwheel with fold-away handle
- Electrically powered pan tilting option
- 63mm dia. heavy-duty stainless steel legs with adjustable feet

### **Controls**

- Large easy use control knobs - heat resistant reinforced
- Easy view control settings on knobs
- Single control for power and heating control
- Indicator lights for power and heating
- Quarter turn water valve control for ease of use
- Automatic pilot ignition and flame failure fitted
- 50-320°C electric thermostatic burner control
- Over temperature safety cut-out
- Fold away handle on manual pan tilt
- Pan up and down switches on electric pan tilt

### **Cleaning and Servicing**

- Seamless full stainless steel pan with rounded corners
- Easy clean stainless steel exterior panels
- Easy connection access via front service panels
- Service friendly lid hinge system
- Access to all parts from front of unit

# Technical data sheet for GAS TILTING BRATT PAN 900mm

## Specifications

**Burner**  
Single 6 bar stainless steel burner 20kW

**Gas power (gross)**  
20kW, 68,600 Btu/hr

**Pan**  
Cooking surface 780mm x 450mm, 3510cm<sup>2</sup>  
215mm deep

**Gas connection**  
R 3/4 (BSP) male  
All units supplied with Natural and LP gas  
regulator

**Water connection**  
Cold water connection  
1/2" tube connection via 15mm crox fitting  
550kPa, 80psi max water pressure

**Electrical connection**  
220-240Vac, 50/60Hz, 1A, 1P+N+E  
3 pin 13A plug cordset fitted

**Dimensions**  
Width 900mm  
Depth 812mm  
Height 915mm  
Incl. splashback 1085mm  
With lid open 1566mm


**Nett weight**  
170kg

**Packing data**  
1.03m<sup>3</sup>  
Width 945mm  
Depth 870mm  
Height 1255mm


**Gas types**  
Available in Natural gas and LP gas, please specify  
when ordering  
Units supplied complete with gas type  
conversion kits

**Options**  
Joining caps



G580-8



G580-8E



G580-8, G580-8E

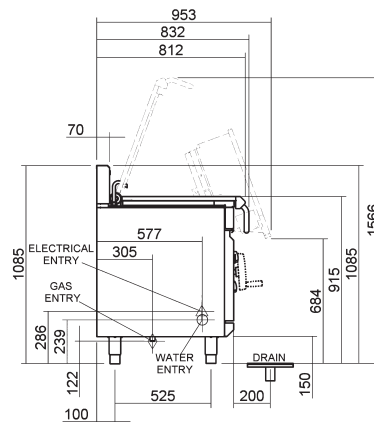

**BLUE SEAL**  
www.blue-seal.co.uk  
www.bluesealevolution.com

**United Kingdom**  
**Blue Seal Limited**  
Unit 67  
Gravelly Business Park  
Gravelly  
Birmingham B24 8TQ  
England  
Telephone 0121-327 5575  
Facsimile 0121-327 9711  
Email sales@blue-seal.co.uk  
www.blue-seal.co.uk

**Australia**  
**Moffat Pty Limited**  
740 Springvale Rd  
Mulgrave  
Victoria 3170  
Australia  
Telephone 03-9518 3888  
Facsimile 03-9518 3833  
Email vsales@moffat.com.au  
www.moffat.com.au

**New Zealand**  
**Moffat Limited**  
16 Osborne St  
PO Box 10-001  
Christchurch 8011  
New Zealand  
Telephone 03-389 1007  
Facsimile 03-389 1276  
Email sales@moffat.co.nz  
www.moffat.co.nz

**ISO 9001**  
Quality  
Management  
Standard

Designed and manufactured by

**MOFFAT**

ISO9001  
All Blue Seal products are designed  
and manufactured by Moffat using  
the internationally recognised  
ISO9001 quality management  
system, covering design,  
manufacture and final inspection,  
ensuring consistent high quality  
at all times.

**CE**

In line with policy to continually  
develop and improve its products,  
Moffat Limited reserves the right to  
change specifications and design  
without notice.