



**HW40**

Dimensions (mm)	External	Internal
Height	1850	
Width	595	
Depth	640	
Capacity (ltr)		
Gross		305
Net		269



**HS40**

Dimensions (mm)	External	Internal
Height	1850	
Width	595	
Depth	640	
Capacity (ltr)		
Gross		305
Net		269



**LW40**

Dimensions (mm)	External	Internal
Height	1850	
Width	595	
Depth	640	
Capacity (ltr)		
Gross		326
Net		234



**LS40**

Dimensions (mm)	External	Internal
Height	1850	
Width	595	
Depth	640	
Capacity (ltr)		
Gross		326
Net		234

## Features

White laminated / stainless steel exterior

White aluminium interior

Reversible door

Lock fitted as standard

4 adjustable shelves

Replaceable door gasket

Rollers to rear, adjustable feet to the front


## Additional Extras

V2-SHELF40L - Large shelf for HW/HS40

V2-SHELF40S - Small shelf for HW/HS40

V2-GASKET40 - Door gasket for HW/HS/LW/LS40


V2-CASTORKIT4 - Castor kit




## Technical Specification

	HW40	HS40	LW40	LS40
Temperature Range	+2°C ~ +10°C	+2°C ~ +10°C	-10°C ~ -20°C	-10°C ~ -20°C
Climate Class	4	4	4	4
Power Supply	13amp	13amp	13amp	13amp
Cooling	Ventilated	Ventilated	Static	Static
Defrost	Automatic	Automatic	Manual	Manual
Refrigerant	R600a	R600a	R290	R290
Energy Efficiency Class	B	B	B	B
Energy Consumption (kw/24hrs)	0.89	0.89	2.18	2.18
Power Usage (w)	127	127	210	210
Weight (kg)	78	78	79	79


### HW40

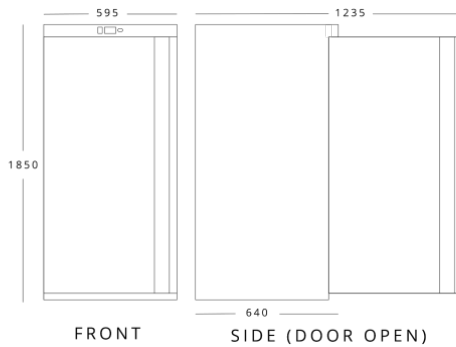

### HS40

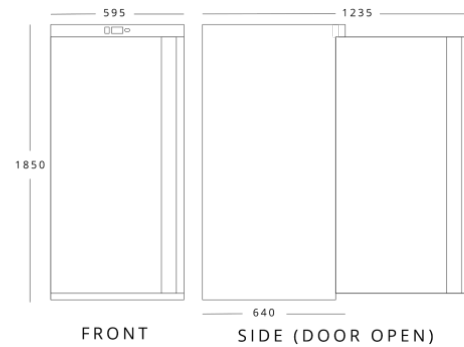

### LW40

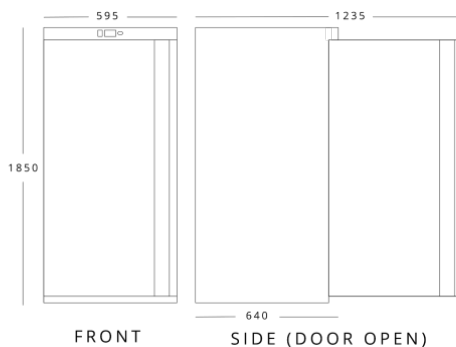

### LS40

