

# Maidaid icemaker

## GRANULAR 200

MODULAR GRANULAR  
WATER COOLED  
ICE MACHINE

230 V / 50 HZ



### GRANULAR 200 Water Cooled

#### Features

- **2 year warranty**
- Produces wet granular ice
- Efficient evaporator with lower energy consumption and high ice production
- Evaporator without gaskets or seals
- Stainless steel auger with resilient coating to maximize lifespan
- Powerful speed reducer on top
- AISI 304 stainless steel body
- Electromechanical control system
- On/off lighted rocker switch in front panel
- Environmentally friendly R290 gas which reduces energy consumption
- Machine supplied with 13 amp moulded plug and cable



R290



**EASI**  
Easy Access for  
Service & Installation



**STIF**  
Strong Inox Frame



**FRONT VENTILATION**



Supplied with:



Water inlet  
filter gasket



Water inlet  
hose



#### Recommended Bins

○ **BIN 130**



○ **BIN 160**



○ **BIN 220**



○ **BIN 400**



For additional information contact our Sales Team on

T: **0345 130 8070** E: **sales@maidaid-halcyon.co.uk** or visit **www.maidaid.co.uk**

# Maidaid icemaker

## GRANULAR 200

MODULAR GRANULAR  
WATER COOLED  
ICE MACHINE

230 V / 50 HZ



### Technical Data

<b>GRANULAR 200</b>	21°C   15°C (Kg)	225	25% RESIDUAL WATER CONTENT	

### Operating Conditions – Production 50Hz





	±10% V
	10°C/43°C
	5°C/38°C
	1 bar/6 bar

V	Hz	ph
230	50	1N


	GRANULAR 200 WATER COOLED				
	°C / °F	10° / 50°	15° / 60°	21° / 70°	30° / 86°
	10° / 50°	239	233	222	213
	21° / 68°	230	<b>225</b>	211	194
	32° / 90°	216	208	199	187
	43° / 109°	192	186	173	166

										(W)	(BTU/h)	(W) 43°C	(n.)
<b>GRANULAR 200</b>	1,651	5,636	647	3	1.5	13	8.9	54.9	1,207	4,120	52	60	0.20

### Installation Diagram All dimensions in mm

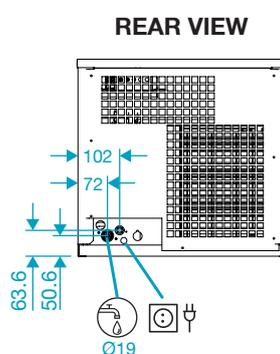

### CENTRAL CROSS SECTION VIEW OF THE BASE



For additional information contact our Sales Team on

T: **0345 130 8070** E: **sales@maidaid-halcyon.co.uk** or visit **www.maidaid.co.uk**

Maidaid reserve the right to alter specifications & dimensions without prior notification, all dimensions will be +/- 3mm.