

## Silverlink 600 Griddles

### Key Features

- Type: Electric
- Counter-top unit
- Smooth machined cooking surface
- Thermostatic temperature control (twin zone models independently controlled)
- Integral splashguard
- Nitrile rubber feet



GS3

### Construction

- Body: stainless steel grade 430
- Griddle plate: 12mm thick
- Integral splashguard : 2mm thick stainless steel grade 430

### Available Options


- Choice of widths and power ratings

### Available Accessories

- SB3 – Splash guard extension
- SB4 – Splash guard extension
- SB6 – Splash guard extension
- SB7 – Splash guard extension
- SB9 – Splash guard extension
- Various pedestals and stands

## Specifications

Model	GS3	GS4	GS6	GS65	GS6T	GS7	GS9
External height (mm)	330	330	330	330	330	330	330
External width (mm)	300	450	600	600	600	750	900
External depth (mm)	611	611	611	611	611	611	611
Cooking area w x d (mm)	262 x 405	412 x 405	562 x 405	562 x 405	562 x 405	712 x 405	862 x 405
Cooking zones	1	1	1	1	2	2	2
Net weight unpacked (kg)	21.2	29.95	38.45	38.45	38.45	45.7	58.85
Gross weight packed (kg)	30	40	50	50	50	61	73
Shipping volume (m <sup>3</sup> )	0.145	0.214	0.27	0.27	0.27	0.324	0.396
Total electrical power rating (kW)	2.0	2.7	3.0	4.5	4.0	6.0	8.6
Electrical supply 1N~+E 230V 50-60Hz Current rating (A)	8.7	11.7	13.0	19.6	18.0	26.0	37.0
Electrical supply 3N~+E 400V 50-60Hz Current Rating (A)	N/A	N/A	N/A	N/A	L1-9.0 L2-9.0 L3-N/A	L1-13.0 L2-13.0 L3-N/A	L1-12.0 L2-12.0 L3-13

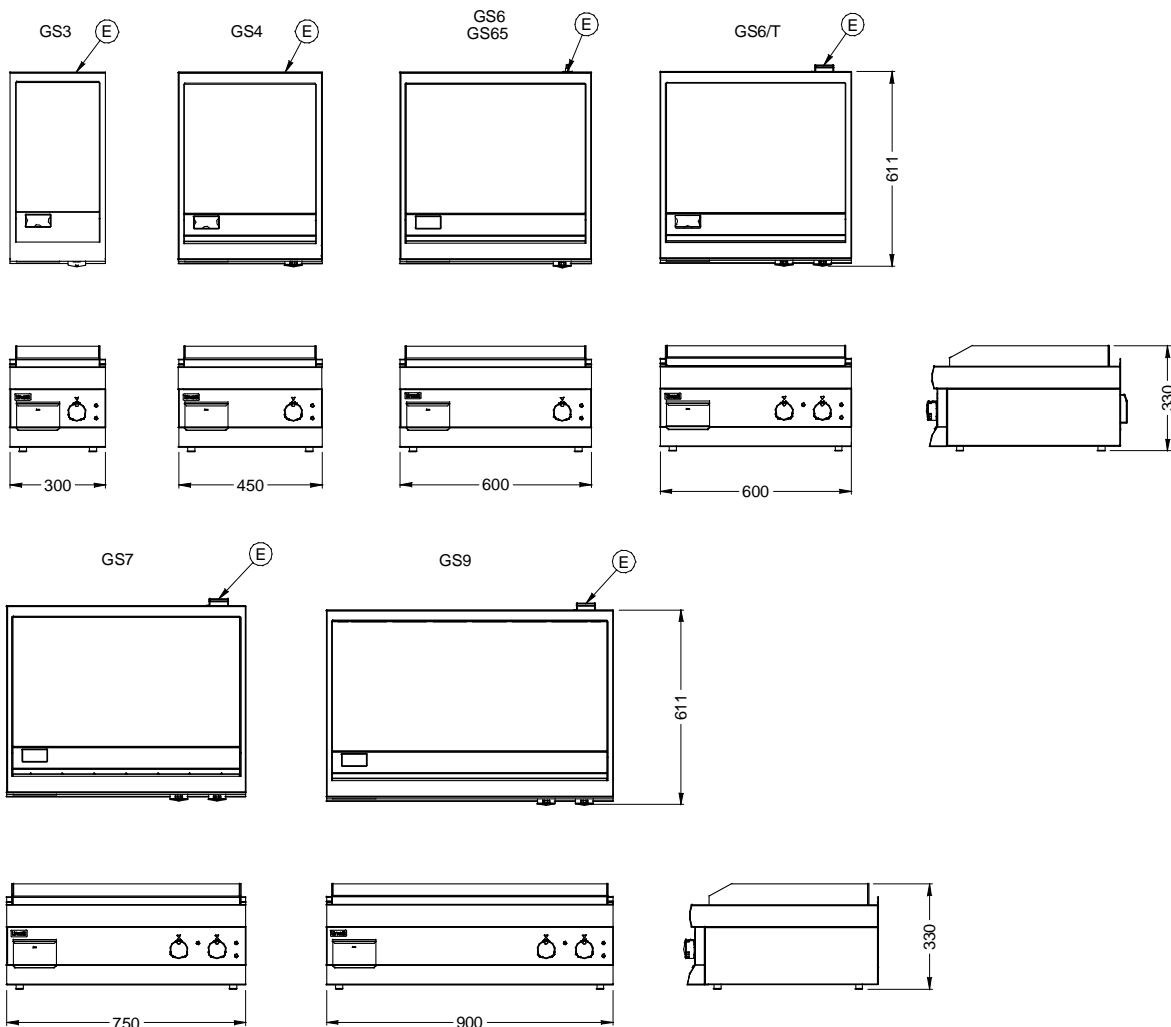

Lincat Limited, Whisby Road,  
Lincoln LN6 3QZ,  
United Kingdom

UK Sales Tel: 01522 875500 UK Spares Tel: 01522 875510 UK General Tel: 01522 875555  
UK Fax: 01522 875530 International Sales Tel: +44 1522 503250 International Fax: +44 1522 875530  
Website: www.lincat.co.uk UK Sales e-mail: sales@lincat.co.uk International Sales e-mail: export@lincat.co.uk



Document ref:  
S-LINKELECGRID  
Issue date: Oct-09