

PROJECT	QUANTITY	ITEM NO
---------	----------	---------

Display counter warmers

Single-tier, humidified

MODEL **HCW-3** single tier 3-pan
HCS-5 single tier 5-pan



Single-tier humidified display counter warmer, model HCW-3 with flip-up pass-through doors.

General Information

The Henny Penny two tier counter warmers are designed specifically for serving and displaying hot food at the point of sale in retail foodservice operations. Units feature high product visibility, pass-through operation, and water-well humidity control.

These attractive, dependable humidified countertop warmers offer practical pass-through convenience while keeping hot food items fresh, appetizing and on display for customer impulse purchases.

The HCW single-tier models offer a humidified holding environment from the heated, auto-fill reservoir in the base. Water temperature and upper radiant heaters are controlled separately.

Tough acrylic flip up doors offer excellent product visibility and convenient pass-through access—a must for high-volume service.

Units are built from high-quality stainless steel and are insulated for energy-efficient operation.

Standard Features

- Stainless steel interior and exterior construction for easy cleaning and long-lasting service.
- Available in two lengths: 3-pan or 5-pan capacity.
- Humidified operation:
 - Water reservoir runs length of unit with automatic or manual fill.
 - Two water well strip heaters.
 - Low water indicator light.
 - Drain tube prevents water well overflow.
 - Water temperature display and control.
- Upper heat provided by long-lasting sheath radiant heaters.
- Insulated top and bottom for energy efficient operation.
- Independent heating controls for upper and lower water pan heat enables a wide range of holding environments for different foods.
- Water temperature display and control.
- Tough, durable acrylic flip-up door panels for see-through, pass-through operation.
- Incandescent lighting for appealing food display.
- Removable access panels for easy maintenance.

<input type="checkbox"/> APPROVED <input type="checkbox"/> APPROVED AS NOTED <input type="checkbox"/> RESUBMIT	
AUTHORIZED SIGNATURE	DATE




Henny Penny Corporation
 PO Box 60 Eaton OH 45320 USA
 +1 937 456.8400 800 417.8417
 +1 937 456.8434 Fax 800 417.8434 Fax
www.hennypenny.com

PROJECT	ITEM NO
---------	---------

Display counter warmers

Single-tier, humidified

MODEL **HCW-3** single tier, 3-pan
HCS-5 single tier, 5-pan

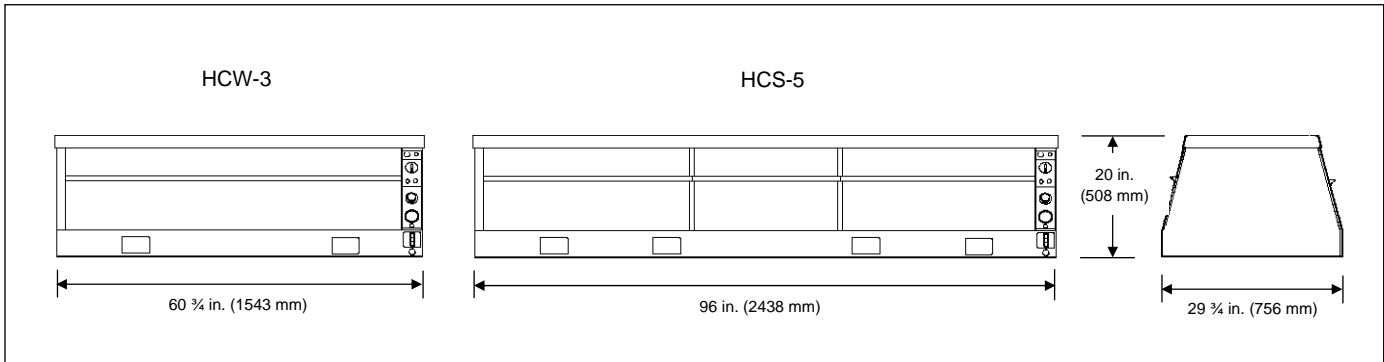

Dimensions

	HCW-3	HCS-5
Length	60 3/4 in. (1543 mm)	96 in. (2438 mm)
Depth	29 3/4 in. (756 mm)	29 3/4 in. (756 mm)
Height	20 in. (508 mm)	32 3/4 in. (832 mm)

Required clearances: N/A

Crated dimensions

	HCW-3	HCS-5
Length	62 3/8 in. (1584 mm)	98 1/2 in. (2502 mm)
Depth	32 5/8 in. (829 mm)	37 3/4 in. (959 mm)
Height	39 in. (991 mm)	27 3/4 in. (705 mm)
Volume	46 cu. ft. (1.29 m ³)	59.7 cu. ft. (1.67 m ³)

Net weight: N/A

Crated weight

HCW-3	262 lbs. (119 kg)
HCS-5	418 lbs. (190 kg)

Water connections: 1/4 in. hot water supply, drain.

Humidity: Auto-fill reservoir in base.

HCW-3	10 gal. (38 liter) reservoir
HCS-5	15 gal. (57 liter) reservoir

Capacity: Full size sheet pans, 18 x 26 in. (457 x 660 mm)

HCW-3	(3) sheet pans lengthwise
HCS-5	(5) sheet pans lengthwise

Laboratory certifications



Electrical

Model	Volts	Phase	Cycle/Hz	Watts	Amps	Wire
HCW-3	120/208	1	50-60	3400	17.6	3+G
	120/230	1	50-60	3400	16.2	3+G
	220-240	1	50-60	3670	15.3	2+G
	120/208	3	50-60	3400	11.5	4+G
	120/230	3	50-60	3400	10.7	4+G
	380-415	3	50-60	3670	5.1	4+G
HCS-5	400	3	50	3400	5.0	3NG
	120/208	1	50/60	8080	40.0	3+G
	120/230	1	50/60	8080	35.1	3+G
	220-240	1	50/60	8692	36.2	2+G
	120/208	3	50/60	8080	22.6	4+G
	120/230	3	50/60	8080	19.8	4+G
HCS-5	380-415	3	50/60	-	-	4+G
	400	3	50	6680	9.7	3NG

NOTE: Units must be hard-wired at site by qualified technician

Bidding Specifications

- Provide Henny Penny model HCW-3 or HCS-5 single-tiered humidified display counter warmer for accumulating, holding and displaying freshly cooked food prior to serving.
- Units feature flip-up door panels on both sides for easy pass-through operation.
- HCW-3 shall hold up to (3) full size sheet pans. HCS-5 shall hold up to (5) full size sheet pans.
- Units shall operate with heated water pan humidity. Water provided by hot water connection and auto-fill reservoir.
- Thermostat controlled upper radiant heaters.
- Materials—interior and exterior of welded stainless steel. Flip-up doors on both sides of scratch-resistant acrylic.
- Units shall have rear-mounted control panel with separate water temperature and radiant heater controls.

Continuing product improvement may subject specifications to change without notice.



www.hennypenny.com