



HPU150

Key Features:

Stainless Steel Interior & Exterior

Front Breathing & Rear Venting Refrigeration System

32°C Ambient Rated Product

R134a Refrigerant (HPU) R600a (LPU)

Zero ODP Injected Polyurethane Insulation

1 / 4°C Refrigerator Temperature Range (HPU)

-18 / -22°C Freezer Temperature Range (LPU)

Electronic Controller With Easy Read LCD Screen

Off Cycle Defrost - Refrigerator

Manual Defrost - Freezer

Door / Drawer Locks Fitted As Standard

Rifle Bore Coated Evaporators

Integrated Flush Door Handle

Adjustable Pilaster Shelving System - Refrigerator

Fixed Plate Shelves - Freezer

Hi / Lo Audio Visual Temperature Alarms

Adjustable Levelling Feet At Front

Rollers At Rear For Easy Positioning

Waste Heat Recovery Condensate Vaporiser System (HPU)

Requires Small Ventilation Gap Above Unit

Proudly made in the UK, Precision's durable all stainless steel under counters have been designed to provide medium duty under counter storage solutions for commercial kitchens all around the world.

These under counters are available in both refrigerated and deep freeze versions and are perfect for space optimisation, in even the smallest of kitchens.



HPU152

HPU153

Options:

Bank of 2 Drawers - (200/200mm) - HPU152

Bank of 3 Drawers - (150/150/150mm) - HPU153


Extra Shelves / Slides

Extra Shelf Clips

Castors

Stacking Kit

Left Hand Hung Door

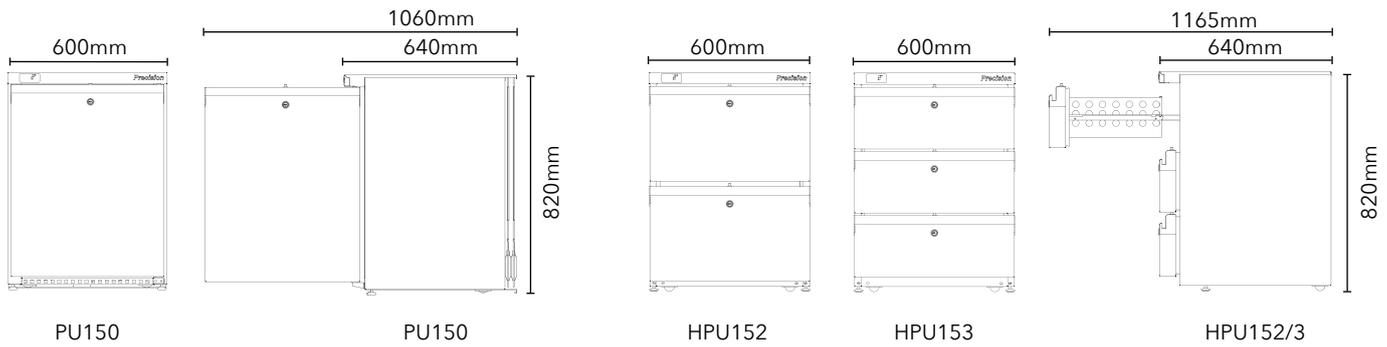

Model	HPU150	HPU152	HPU153	LPU150
Type	Refrigerator	Refrigerator	Refrigerator	Freezer
Material	ST/ST Int/Ext	ST/ST Int/Ext	ST/ST Int/Ext	ST/ST Int/Ext
Shelf Size	480 x 360 480 x 260	N/A	N/A	495 x 425
Number of Shelves	2	N/A	N/A	2
Max Number of Shelves	2	N/A	N/A	2
Temperature Range	1 / 4°C	1 / 4°C	1 / 4°C	-18 / -22°C
Exterior WxDxH (mm)	600x640x820	600x640x820	600x640x820	600x640x820
Net Usable Volume (litres)	83.2	68.4	66.8	77.8
Weight (KG)	62	70	75	60
Refrigerant / GWP	R134a / 1430	R134a / 1430	R134a / 1430	R600a / 3
Refrigeration Watts (+45°C Condensing)	307	307	307	110
Evaporating Temp	-10°C	-10°C	-10°C	-30°C
Heat Rejection Watts*	265	470	470	221
Noise Output (dBa)	52	52	52	53
Power	230 / 50 / 1	230 / 50 / 1	230 / 50 / 1	230 / 50 / 1
Running Amps	1	1	1	0.5
Energy Consumption / 24hrs - kWh**	1	3.19	3.1	1.9
Energy Consumption / Year (AEC) - kWh**	365	1164	1132	694
Energy Efficiency Class**	A	D	D	A

* Heat Rejection is taken at the listed evaporating and condensing condition. Watts is calculated by taking the total power of the cabinet.

** Tested to EN16825

We are constantly innovating and improving our products. Please always check our website for the most up-to-date version of this spec sheet