



HUBC411

Precision Under Broiler Counters are designed to provide refrigerated storage, in an easy pull-out drawer format, under the chargrill or griddle within the cooking line. This reduces non productive time and congestion within the kitchen giving staff refrigerated storage exactly where it's needed.

Proudly made in the UK, these robust counters are capable of meeting the highest demands of commercial kitchens all around the world.



HUBC412

Centrally Positioned Evaporator Placed Between Drawer Sets For Even Internal Temperature Distribution

Key Features:

Stainless Steel Interior & Exterior

Front Breathing & Rear Venting Refrigeration System
Designed To Operate In 43°C Ambient

GN 1/1 and/or GN 2/1 Drawer System

Centrally Positioned Evaporator Between Drawers

R134a Refrigerant

Zero ODP Injected Polyurethane Insulation - 60mm

1 / 4°C Refrigerator Temperature Range

Electronic Controller With Easy Read LCD Screen

Off Cycle Defrost

Heat Resistant Worktop Designed To Carry Up To 150kg (Evenly Spread)

Rifle Bore Coated Evaporators

Integrated Flush Door Handle

Gastronorm Sized Drawers

Hi / Lo Audio Visual Temperature Alarms

Condensing Unit Safety System To Protect Compressor From Blocked Condensers

Heavy Duty Brake & Swivel Castors

Waste Heat Recovery Condensate Vaporiser System

Options:


Single Deep Drawer In Place Of Bank Of 2 Drawers

Drawer Locks

ST/ST Back

Notes:

Ventilation At Rear Required When Plinth Mounted

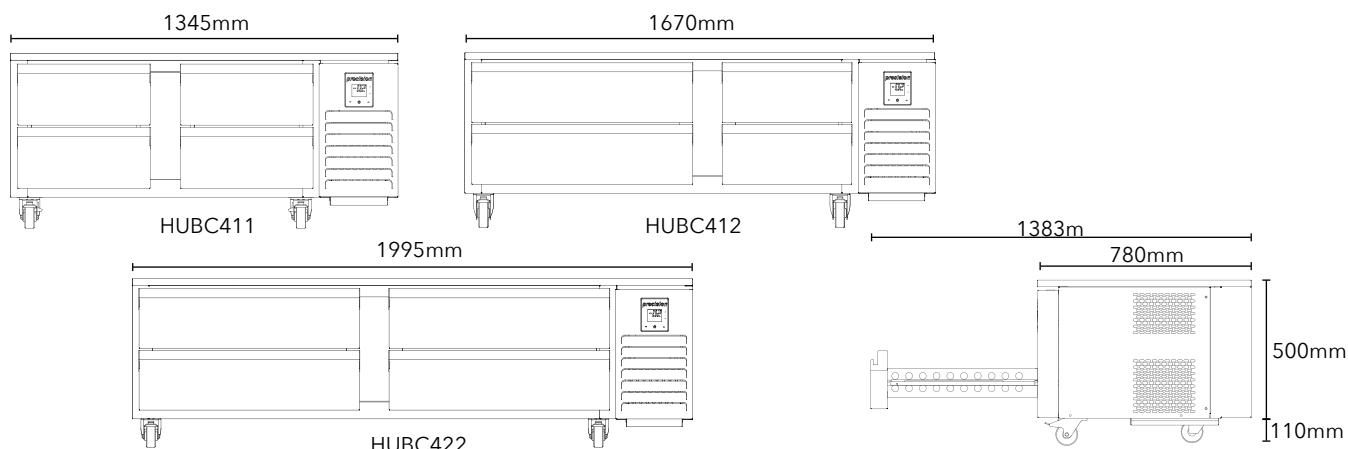

Model	HUBC411	HUBC412	HUBC422
Type	Refrigerator	Refrigerator	Refrigerator
Material	ST/ST Int/Ext	ST/ST Int/Ext	ST/ST Int/Ext
Drawer Size	4 x GN1/1	2 x GN1/1 + 2 x GN2/1	4 x GN2/1
Maximum Pan Depth	100mm	100mm	100mm
Max Number of Shelves	N/A	N/A	N/A
Temperature Range	1 / 4°C	1 / 4°C	1 / 4°C
Exterior WxDxH (mm)	1345x780x610	1670x780x610	1995x780x610
Net Usable Volume (litres)	69.6	104.3	139
Weight (KG)	110	140	170
Refrigerant / GWP	R134a / 1430	R134a / 1430	R134a / 1430
Refrigeration Watts (+45°C Condensing)	412	412	412
Evaporating Temp	-10°C	-10°C	-10°C
Heat Rejection Watts*	670	670	670
Noise Output (dBA)	62	62	62
Power	230 / 50 / 1	230 / 50 / 1	230 / 50 / 1
Running Amps	1.8	1.8	1.8
Energy Consumption / 24hrs - kWh**	1.66	1.78	2.08
Energy Consumption / Year (AEC) - kWh**	606	650	759
Energy Efficiency Class**	B	B	C

* Heat Rejection is taken at the listed evaporating and condensing condition. Watts is calculated by taking the total power of the cabinet.

** Tested to EN16825

We are constantly innovating and improving our products. Please always check our website for the most up-to-date version of this spec sheet