



Indigo™ Series 322 Ice Cube Machine

ID-0322A | | _{IY-0324A} D-0323W Model: Indiao Series i-322

Ice Machine Flectric

115/60/1 standard. (208-230/60/1 and 230/50/1 also available)

Minimum circuit ampacity:

Air-cooled: 11.5 1ph Water-cooled: 10.7 1ph

Maximum fuse size:

Air-cooled: 15 amps Water-cooled: 15 amps

Ice Machine on B-320 Bin

Specifications

BTU Per Hour:

3,300 (average) 4,500 (peak)

Refrigerant:

R-404A CFC-free

Operating Limits:

- Ambient Temperature Range: 35° to 110°F (1.7° to 43.3°C) Water Temperature Range: 35° to 90°F (1.7° to 32.2°C)
- · Water Pressure Ice Maker Water In: Min. 20 psi (137.9 kPA) Max. 80 psi (551.1 kPA)

Designed for operators who know that ice is critical to their business, the Indigo™ Series ice machine's preventative diagnostics continually monitor itself for reliable ice production. Improvements in cleanability and programmability make your ice machine easy to own and less expensive to operate.

☑ IY-0325W

- Space-Saving Design Up to 350 lbs. (159 kgs.) daily ice production and only 22" (55.88 cm) wide.
- Intelligent Diagnostics provide 24 hour preventative maintenance and diagnostic feedback for trouble free operation.
- Acoustical Ice Sensing Probe for reliable operation in challenging water conditions.
- EasyRead Display communicates operating status, cleaning reminders, and asset information through a blue illuminated display.
- Programmable Ice Production by On/Off Time, Ice Volume or Bin Level (with accessory bin level control) further improves energy efficiency and savings.
- Easy to Clean Foodzone Hinged front door swings out for easy access. Removable water-trough, distribution tube, curtain, and sensing probes for fast and efficient cleaning. Select components made with AlphaSan® antimicrobial.
- DuraTech™ Exterior provides superior corrosion resistance. Stainless finish with innovative clear-coat resists fingerprints and dirt.
- Available LuminIce™ Growth Inhibitor controls the growth of bacteria and yeast within the foodzone.



Ice Shape



Half Dice (.95 x 2.86 x 2.22 cm)



Dice ½" x ½" x ½" (2.22 x 2.22 x 2.22 cm)














QUALITY MANAGEMENT SYSTEM = ISO 9001:2008 =

2110 South 26th Street PO Box 1720 Manitowoc, WI 54221-1720 USA Tel: 1.920.682.0161 Fax: 1.920.683.7589 www.manitowocice.com







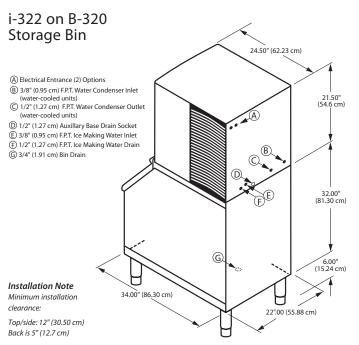

Space-Saving Designs



| | i-322 B-320 | i-322 B-420 | |
|----------------|---------------------|----------------------|--|
| Height | 59.50" 151.13 cm | 71.50" 181.61 cm | |
| Width | 22.00" 55.88 cm | 22.00" 55.88 cm | |
| Depth | 34.00" 86.30 cm | 34.00" 86.30 cm | |
| Bin Storage | 210 lbs. 95 kgs. | 310 lbs. 141 kgs. | |

Height includes adjustable bin legs 6.00" to 8.00", (15.24 to 20.32 cm) set at 6.00" (15.24 cm).

Specifications

| | | | | Ice Production | on 24 Hours | Power Usage kWh/100 lbs. | Water Usage/100 lbs. 45.4 kgs. of Ice | ENERGY |
|--|--------------|--|--------------|--------------------|--------------------|-----------------------------|--|--------|
| | | Model | Ice Shape | 70°Air/ 50°F Water | 90°Air/ 70°F Water | @90°Air/70°F | Potable Water | STAR* |
| | AIR-COOLED | ID-0322A | dice | 335 lbs. | 225 lbs. | 7.49 | 23.9 Gal. | |
| | | ID-0322A | | 152 kgs. | 102 kgs. | 7.49 | 90.5 L | * |
| | | IY-0324A half-did | half-dice | 350 lbs. | 230 lbs. | 7.32 | 23.9 Gal. | * |
| | | | | 159 kgs. | 104 kgs. | | 90.5 L | |
| | | ID-0323W | dice | 330 lbs. | 270 lbs. | 6.19 | 23.9 Gal. | NA |
| | ED | | | 150 kgs. | 122 kgs. | 0.19 | 90.5 L | NA |
| | WATER-COOLED | lY-0325W half-dice | 350 lbs. | 290 lbs. | 5.94 | 23.9 Gal. | NA | |
| | | 11-032500 | | 159 kgs. | 132 kgs. | 5.94 | 90.5 L | INA |
| | 3 | * Water-cooled Condenser Water Usage / 100 lbs /45 4 kgs Of Ice: 193 gal/731 l | | | | | | |

* Water-cooled models are excluded from ENERGY STAR qualification.

Order ice storage bin separately.

Accessories

LuminIce™ **Growth Inhibitor** reduces yeast and bacteria growth for a

cleaner ice machine.



Bin Level Control Allows ice bin level to be automatically set. Built-in LED light illuminates bin.



Arctic Pure® Water Filters Reduces sediment and chlorine odors for

better tasting ice.



AuCS® schedules and performs routine ice machine cleaning automatically.



4775C ©2011 Manitowoc 6/11 Continuing product improvement may necessitate change of specifications without 1

2110 South 26th Street PO Box 1720 Manitowoc, WI 54221-1720 USA Tel: 1.920.682.0161 Fax: 1.920.683.7589 www.manitowocice.com

