

Installation Options Combi-Duo

iCombi Range - XS: 6-2/3: 6-1/1: 6-2/1: 10-1/1: 10-2/1

 For units with a top rack height above 1.6m the installer should apply the safe working label to the unit



Left Hand Hinge



Right Hand Hinge



Unit	XS 6-2/3 on XS 6-2/3		XS 6-2/3 on XS 6-2/3	
Power	E	E	E	E
Stacking Kit	60.74.276		60.73.768	

Code	Height	Code	Height
N/A	1030 mm	N/A	1030 mm
N/A			
60.31.020	1590 mm	60.31.020	1590 mm
60.31.170	1590 mm	60.31.170	1590 mm
60.31.046	1600 mm	60.31.046	1600 mm
60.31.058	1600 mm	60.31.058	1600 mm

Code	Height	Code	Height
N/A	1355 mm	N/A	1355 mm
60.74.795	1390 mm	60.74.795	1390 mm
60.31.622	1435 mm	60.31.622	1435 mm
60.31.668	1505 mm	60.31.668	1505 mm
60.31.200	1555 mm	60.31.200	1555 mm
60.31.201	1555 mm	60.31.201	1555 mm

Code	Height	Code	Height
N/A	1355 mm	N/A	1355 mm
60.74.597	1390 mm	60.74.597	1390 mm
60.31.635	1435 mm	60.31.635	1435 mm
60.31.671	1505 mm	60.31.671	1505 mm
60.31.203	1555 mm	60.31.203	1555 mm
60.31.204	1555 mm	60.31.204	1555 mm

Code	Height	Code	Height
N/A	1409 mm	N/A	1529 mm
60.74.795	1443 mm	60.74.795	1563 mm
60.31.622	1489 mm	60.31.622	1609 mm
60.31.668	1559 mm	60.31.668	1679 mm
60.31.200	1609 mm	60.31.200	1729 mm
60.31.201	1609 mm	60.31.201	1729 mm

Height to Top Rack
Base Level
Levelling Kit [H]34.5 mm
Kit with height adjustable castors [H]80 mm
Substructure with feet [H]150 mm
Stand I (XS 6-2/3 = [H]555 mm) (6-1/1 & 6-2/1 = [H]200 mm)
Stand I with Castors (XS 6-2/3 = [H]567 mm) (6-1/1 & 6-2/1 = [H]200 mm)
Stand II [H]556 mm
Stand II with fixing mount [H]557 mm

Code	Height	Code	Height
N/A	1030 mm	N/A	1030 mm
N/A			
60.31.020	1590 mm	60.31.020	1590 mm
60.31.170	1590 mm	60.31.170	1590 mm
60.31.046	1600 mm	60.31.046	1600 mm
60.31.058	1600 mm	60.31.058	1600 mm

Code	Height	Code	Height
N/A	1355 mm	N/A	1355 mm
60.74.795	1390 mm	60.74.795	1390 mm
60.31.622	1435 mm	60.31.622	1435 mm
60.31.668	1505 mm	60.31.668	1505 mm
60.31.200	1555 mm	60.31.200	1555 mm
60.31.201	1555 mm	60.31.201	1555 mm

Code	Height	Code	Height
N/A	1355 mm	N/A	1355 mm
60.74.597	1390 mm	60.74.597	1390 mm
60.31.635	1435 mm	60.31.635	1435 mm
60.31.671	1505 mm	60.31.671	1505 mm
60.31.203	1555 mm	60.31.203	1555 mm
60.31.204	1555 mm	60.31.204	1555 mm

Code	Height	Code	Height
N/A	1409 mm	N/A	1529 mm
60.74.795	1443 mm	60.74.795	1563 mm
60.31.622	1489 mm	60.31.622	1609 mm
60.31.668	1559 mm	60.31.668	1679 mm
60.31.200	1609 mm	60.31.200	1729 mm
60.31.201	1609 mm	60.31.201	1729 mm

UltraVents
Exhaust Hood
UltraVent
UltraVent Plus
Factory Fitted UltraVent (XS 6-2/3 ONLY)
Factory Fitted UltraVent Plus (XS 6-2/3 ONLY)

Code	Code
N/A	
60.73.943	60.73.943
60.74.404	60.74.404
Option Available	
Option Available	

Code	Code
N/A	

Code	Code
N/A	

Code	Code
N/A	
60.76.221	
60.76.169	
60.76.173	



Unit	6-2/1 on 6-2/1		6-2/1 on 6-2/1	
Power	E or G	E	E or G	G
Stacking Kit	60.74.725		60.75.752	

Code	Height	Code	Height
N/A	1409 mm	N/A	1529 mm
60.74.597	1443 mm	60.74.597	1563 mm
60.31.635	1489 mm	60.31.635	1609 mm
60.31.671	1559 mm	60.31.671	1679 mm
60.31.203	1609 mm	60.31.203	1729 mm
60.31.204	1609 mm	60.31.204	1729 mm

Code	Height	Code	Height
N/A	1615 mm	N/A	1615 mm
60.74.795	1649 mm	60.74.795	1649 mm
60.31.622	1695 mm	60.31.622	1695 mm
60.31.668	1765 mm	60.31.668	1765 mm
60.31.200	1815 mm	60.31.200	1815 mm
60.31.201	1815 mm	60.31.201	1815 mm

Code	Height	Code	Height
N/A	1615 mm	N/A	1615 mm
60.74.597	1649 mm	60.74.597	1649 mm
60.31.635	1695 mm	60.31.635	1695 mm
60.31.671	1765 mm	60.31.671	1765 mm
60.31.203	1815 mm	60.31.203	1815 mm
60.31.204	1815 mm	60.31.204	1815 mm

Code	Height	Code	Height
N/A	1669 mm	N/A	1669 mm
60.74.795	1703 mm	60.74.597	1703 mm
60.31.622	1749 mm	60.31.635	1749 mm
60.31.668	1819 mm	60.31.671	1819 mm
60.31.200	1869 mm	60.31.203	1869 mm
60.31.201	1869 mm	60.31.204	1869 mm

Height to Top Rack
Base Level
Levelling Kit [H]34.5 mm
Kit with height adjustable castors [H]80 mm
Substructure with feet [H]150 mm
Stand I [H]200 mm
Stand I with Castors [H]200 mm

Code	Height	Code	Height
N/A	1409 mm	N/A	1529 mm
60.74.597	1443 mm	60.74.597	1563 mm
60.31.635	1489 mm	60.31.635	1609 mm
60.31.671	1559 mm	60.31.671	1679 mm
60.31.203	1609 mm	60.31.203	1729 mm
60.31.204	1609 mm	60.31.204	1729 mm

Code	Height	Code	Height
N/A	1615 mm	N/A	1615 mm
60.74.795	1649 mm	60.74.795	1649 mm
60.31.622	1695 mm	60.31.622	1695 mm
60.31.668	1765 mm	60.31.668	1765 mm
60.31.200	1815 mm	60.31.200	1815 mm
60.31.201	1815 mm	60.31.201	1815 mm

Code	Height	Code	Height
N/A	1615 mm	N/A	1615 mm
60.74.597	1649 mm	60.74.597	1649 mm
60.31.635	1695 mm	60.31.635	1695 mm
60.31.671	1765 mm	60.31.671	1765 mm
60.31.203	1815 mm	60.31.203	1815 mm
60.31.204	1815 mm	60.31.204	1815 mm

Code	Height	Code	Height
N/A	1669 mm	N/A	1669 mm
60.74.795	1703 mm	60.74.597	1703 mm
60.31.622	1749 mm	60.31.635	1749 mm
60.31.668	1819 mm	60.31.671	1819 mm
60.31.200	1869 mm	60.31.203	1869 mm
60.31.201	1869 mm	60.31.204	1869 mm

UltraVents
Exhaust Hood
UltraVent
UltraVent Plus

Code	Code
N/A	
60.76.222	
60.76.170	
60.76.174	

Code	Code
N/A	

Code	Code
N/A	

Code	Code
N/A	
60.76.221	60.76.222
60.76.169	60.76.170
60.76.173	60.76.174

Please note # There are several different elements used within the stacking of units. These include previous generation units and installation requirements therefore; we would always recommend discussing the individual requirements before placing the order to ensure all factors are covered with your Regional Sales Manager.

Installation Options Combi-Duo

iCombi Range - XS: 6-2/3: 6-1/1: 6-2/1: 10-1/1: 10-2/1



for units with a top rack height above 1.6m the installer should apply the safe working label to the unit



Left Hand Hinge



Right Hand hinge



Unit
Power
Stacking Kit

XS 6-2/3 on XS 6-2/3		XS 6-2/3 on XS 6-2/3	
Top	Bottom	Top	Bottom
E	E	E	E
60.74.276		60.73.768	

XS on 6-1/1		XS on 6-1/1	
Top	Bottom	Top	Bottom
E	E	E	G
60.75.755		60.75.751	

XS on 6-2/1		XS on 6-2/1	
Top	Bottom	Top	Bottom
E	E	E	G
60.75.756		60.75.752	

6-1/1 on 6-1/1		6-1/1 on 6-1/1	
Top	Bottom	Top	Bottom
E or G	E	E or G	G
60.73.991		60.75.751	

Height to Top Rack
Base Level
Levelling Kit [H]34.5 mm
Kit with height adjustable castors [H]80 mm
Substructure with feet [H]150 mm
Stand I (XS 6-2/3 = [H]555 mm) (6-1/1 & 6-2/1 = [H]200 mm)
Stand I with Castors (XS 6-2/3 = [H]567 mm) (6-1/1 & 6-2/1 = [H]200 mm)
Stand II [H]556 mm
Stand II with fixing mount [H]557 mm

Code	Height	Code	Height
N/A	1030 mm	N/A	1030 mm
N/A			
60.31.020	1590 mm	60.31.020	1590 mm
60.31.170	1590 mm	60.31.170	1590 mm
60.31.046	1600 mm	60.31.046	1600 mm
60.31.058	1600 mm	60.31.058	1600 mm

Code	Height	Code	Height
N/A	1355 mm	N/A	1355 mm
60.74.795	1390 mm	60.74.795	1390 mm
60.31.622	1435 mm	60.31.622	1435 mm
60.31.668	1505 mm	60.31.668	1505 mm
60.31.200	1555 mm	60.31.200	1555 mm
60.31.201	1555 mm	60.31.201	1555 mm

Code	Height	Code	Height
N/A	1355 mm	N/A	1355 mm
60.74.597	1390 mm	60.74.597	1390 mm
60.31.635	1435 mm	60.31.635	1435 mm
60.31.671	1505 mm	60.31.671	1505 mm
60.31.203	1555 mm	60.31.203	1555 mm
60.31.204	1555 mm	60.31.204	1555 mm

Code	Height	Code	Height
N/A	1409 mm	N/A	1529 mm
60.74.795	1443 mm	60.74.795	1563 mm
60.31.622	1489 mm	60.31.622	1609 mm
60.31.668	1559 mm	60.31.668	1679 mm
60.31.200	1609 mm	60.31.200	1729 mm
60.31.201	1609 mm	60.31.201	1729 mm

UltraVents
Exhaust Hood
UltraVent
UltraVent Plus
Factory Fitted UltraVent (XS 6-2/3 ONLY)
Factory Fitted UltraVent Plus (XS 6-2/3 ONLY)

Code	Code
N/A	
60.73.943	60.73.943
60.74.404	60.74.404
Option Available	
Option Available	

Code	Code
N/A	

Code	Code
N/A	

Code	Code
60.76.221	N/A
60.76.169	
60.76.173	

Please note # There are several different elements used within the stacking of units. These include previous generation units and installation requirements therefore; we would always recommend discussing the individual requirements before placing the order to ensure all factors are covered with your Regional Sales Manager.

Installation Options Combi-Duo

iCombi Range - XS: 6-2/3: 6-1/1: 6-2/1: 10-1/1: 10-2/1



for units with a top rack height above 1.6m the installer should apply the safe working label to the unit



Unit
Power
Stacking Kit

6-2/1 on 6-2/1		6-2/1 on 6-2/1	
Top	Bottom	Top	Bottom
E or G	E	E or G	G
60.74.725		60.75.752	

XS on 10- 1/1		XS on 10-1/1	
Top	Bottom	Top	Bottom
E	E	E	G
60.75.755		60.75.751	

XS on 10-2/1		XS on 10-2/1	
Top	Bottom	Top	Bottom
E	E	E	G
60.75.756		60.75.752	

6-1/1 on 10-1/1		6-2/1 on 10-2/1	
Top	Bottom	Top	Bottom
E	E	E	E
60.73.991		60.74.725	

Height to Top Rack
Base Level
Levelling Kit [H]34.5 mm
Kit with height adjustable castors [H]80 mm
Substructure with feet [H]150 mm
Stand I [H]200 mm
Stand I with Castors [H]200 mm

Code	Height	Code	Height
N/A	1409 mm	N/A	1529 mm
60.74.597	1443 mm	60.74.597	1563 mm
60.31.635	1489 mm	60.31.635	1609 mm
60.31.671	1559 mm	60.31.671	1679 mm
60.31.203	1609 mm	60.31.203	1729 mm
60.31.204	1609 mm	60.31.204	1729 mm

Code	Height	Code	Height
N/A	1615 mm	N/A	1615 mm
60.74.795	1649 mm	60.74.795	1649 mm
60.31.622	1695 mm	60.31.622	1695 mm
60.31.668	1765 mm	60.31.668	1765 mm
60.31.200	1815 mm	60.31.200	1815 mm
60.31.201	1815 mm	60.31.201	1815 mm

Code	Height	Code	Height
N/A	1615 mm	N/A	1615 mm
60.74.597	1649 mm	60.74.597	1649 mm
60.31.635	1695 mm	60.31.635	1695 mm
60.31.671	1765 mm	60.31.671	1765 mm
60.31.203	1815 mm	60.31.203	1815 mm
60.31.204	1815 mm	60.31.204	1815 mm

Code	Height	Code	Height
N/A	1669 mm	N/A	1669 mm
60.74.795	1703 mm	60.74.597	1703 mm
60.31.622	1749 mm	60.31.635	1749 mm
60.31.668	1819 mm	60.31.671	1819 mm
60.31.200	1869 mm	60.31.203	1869 mm
60.31.201	1869 mm	60.31.204	1869 mm

UltraVents
Exhaust Hood
UltraVent
UltraVent Plus

Code	Code
60.76.222	N/A
60.76.170	
60.76.174	

Code	Code
N/A	N/A

Code	Code
N/A	N/A

Code	Code
60.76.221	60.76.222
60.76.169	60.76.170
60.76.173	60.76.174


Please note # There are several different elements used within the stacking of units. These include previous generation units and installation requirements therefore; we would always recommend discussing the individual requirements before placing the order to ensure all factors are covered with your Regional Sales Manager.

Installation Options Combi-Duo

iCombi XS-6-2/3 on iCombi XS-6-2/3



for units with a top rack height above 1.6m the installer should apply the safe working label to the unit

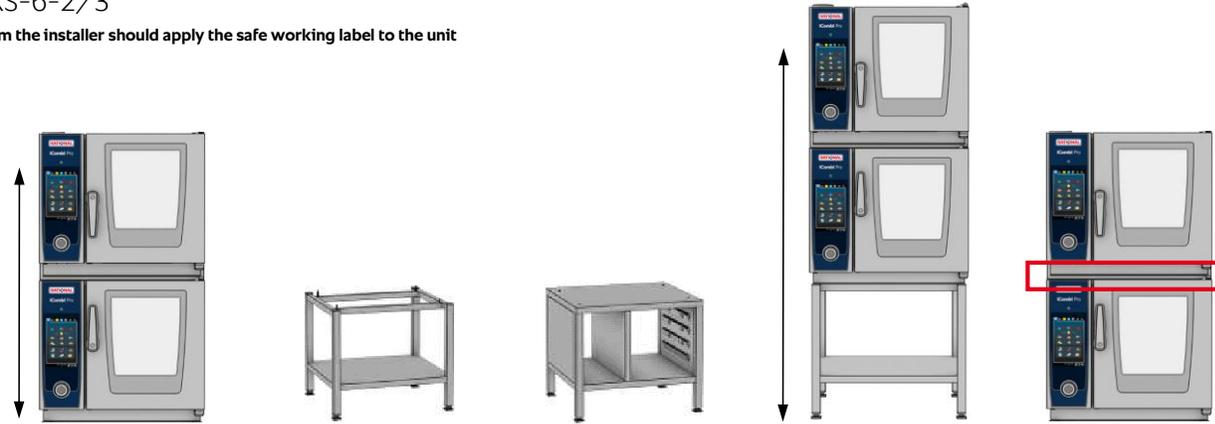

Floor - level base set-up	Stand I	Stand II	Combi Duo XS on Stand I	Combi-Duo kit electric	XS or 6-2/3rd
0mm <i>(not recommended)</i>	555 mm	556 mm	(1590 mm)	Height of 30 mm	Unavailable as a Gas option

Top Rack Overall Height			
Electric	1030 mm	1590 mm	1600 mm

Stacking Kits	For other configurations please see main price list	List Price
60.73.768	Model XS on XS or 6-2/3 on 6-2/3 (Right Hand Hinge)	£510
60.74.276	Model XS on XS or 6-2/3 on 6-2/3 (Left Hand Hinge)	£510

Stand I	Open on all sides	List Price
60.31.020	XS or 6-2/3 Standard, Dimensions W[634] D[558] H[555] mm	£428
60.31.170	XS or 6-2/3 with castors, Dimensions W[683] D[656] H[567] mm	£619

Stand II	Two sided openings, with side panels and support rails	List Price
60.31.046	XS or 6-2/3 Standard, Dimensions W[639] D[563] H[556] mm	£762
60.31.058	XS or 6-2/3 with fixing mount, Standard, Dimensions W[689] D[613] H[557] mm	£881

UltraVents	Models XS on XS & 6-2/3 on 6-2/3	List Price
60.73.943	XS or 6-2/3 UltraVent - Condensation hood to extract steam vapours (no external connection necessary)	£2,705
60.74.404	XS or 6-2/3 UltraVent Plus - Condensation and special filter for extracting smoke (no external connection necessary)	£4,124
UltraVent factory fitted	XS or 6-2/3 UltraVent - Condensation hood to extract steam vapours (no external connection necessary)	£2,670
UltraVent Plus factory fitted	XS or 6-2/3 UltraVent Plus - Condensation and special filter for extracting smoke (no external connection necessary)	£4,089

Adapter Kit	For installation of UltraVent/Extraction Hood on SelfCookingCenter® & CombiMaster® Plus from 09/2011	List Price
60.73.945	Model XS or 6-2/3 (Please note this is already included when the above 60.73.943 & 60.74.404 UltraVents are purchased)	£125

Please note # There are several different elements used within the stacking of units. These include previous generation units and installation requirements therefore; we would always recommend discussing the individual requirements before placing the order to ensure all factors are covered with your Regional Sales Manager.

Installation Options Combi-Duo

iCombi 6-1/1 on iCombi 6-1/1 & iCombi 6-2/1 on iCombi 6-2/1



for units with a top rack height above 1.6m the installer should apply the safe working label to the unit



Floor - level base set-up	Levelling kit	Kit with castors	Sub-structure	Stand I	Combi-Duo kit electric		Combi-Duo kit gas
0mm (not recommended)	34.5 mm	80 mm	150 mm	200 mm	Height of 145 mm	Height of 30 mm	Height of 145 mm
					XS 6-2/3 on 6-1/1	6-1/1 on 6-1/1	
					XS 6-2/3 on 6-2/2	6-2/1 on 6-2/1	

Top Rack Overall Height	1600mm is the European guideline for safe working practice, however, this is not legislation just a guide.					If you require any assistance, advice or clarification please contact your Regional Sales Manager
Electric (6-1/1 on 6-1/1 & 6-2/1 on 6-2/1)	1409 mm	1443 mm	1489 mm	1559 mm	1609 mm	
Gas (6-1/1 on 6-1/1 & 6-2/1 on 6-2/1)	1529 mm	1563 mm	1609 mm	1679 mm	1729 mm	
Electric (XS 6-2/3 on 6-1/1 or 6-2/1)	1355 mm	1390 mm	1435 mm	1505 mm	1555 mm	
Gas (XS 6-2/3 on 6-1/1 or 6-2/1)	1355 mm	1390 mm	1435 mm	1505 mm	1555 mm	

Stacking Kits	Models 6-1/1 on 6-1/1 & 6-2/1 on 6-2/1	List Price
60.73.991	Model 6-1/1 E or G on either 6-1/1 (Left & Right Hand Hinge) - Bottom unit Electric only	£665
60.74.725	Model 6-2/1 E or G on 6-2/1 E (Left & Right Hand Hinge) - Bottom unit Electric only	£869
60.75.751	Model 6-2/3 (XS) or 6-1/1 E or G on a 6-1/1G (Left & Right Hand Hinge) - Bottom unit Gas only	£931
60.75.752	Model 6-1/1 or 6-2/1 E or G, XS 6-2/3rd on Model 6-2/1 G (Left & Right Hand Hinge) - Bottom unit Gas only	£1,217
60.75.755	Model 6-2/3 (XS) on 6-1/1 E (Left & Right Hand Hinge) - Bottom unit Electric only	£931
60.75.756	Model 6-1/1 E or G or XS 6-2/3rd on Model 6-2/1 E (Left & Right Hand Hinge) - Bottom unit Electric only	£1,217

Stands & Accessories	Models 6-1/1 on 6-1/1 & 6-2/1 on 6-2/1	List Price
60.74.795	Levelling kit models 6-1/1 on 6-1/1, Dimensions W[850] D[614] H[35]mm	£204
60.74.597	Levelling kit models 6-2/1 on 6-2/1, Dimensions W[1072] D[814] H[35] mm	£232
60.31.622	Kit with height adjustable castors 6-1/1 on 6-1/1, W[948] D[634] H[80] mm	£272
60.31.635	Kit with height adjustable castors 6-2/1 on 6-2/1, W[1170] D[834] H[80] mm	£296
60.31.668	Substructure with feet 6-1/1 on 6-1/1, W[870] D[635] H[150] mm (Option 100mm feet)	£428
60.31.671	Substructure with feet 6-2/1 on 6-2/1, W[1092] D[835] H[150] mm (Option 100mm feet)	£499
60.31.200	Stand I - 6-1/1 on 6-1/1 Standard, Dimensions W[860] D[685] H[200] mm	£428
60.31.201	Stand I - 6-1/1 on 6-1/1 with castors, Dimensions W[883] D[763] H[200] mm	£644
60.31.203	Stand I - 6-2/1 on 6-2/1 Standard, Dimensions W[1082] D[885] H[200] mm	£499
60.31.204	Stand I - 6-2/1 on 6-2/1 with castors, Dimensions W[1105] D[969] H[200] mm	£722

UltraVents (Electric Cooking Systems ONLY)	Models 6-1/1 on 6-1/1 & 6-2/1 on 6-2/1	List Price
60.76.169	6-1/1 on 6-1/1 - UltraVent - Condensation hood to extract steam vapours (no external connection necessary)	£3,768
60.76.173	6-1/1 on 6-1/1 - UltraVent Plus - Condensation and special filter for extracting smoke (no external connection necessary)	£6,028
60.76.221	6-1/1 on 6-1/1 - Exhaust Hood - to extract vapours (external connection required)	£3,233
60.76.170	6-2/1 on 6-2/1 - UltraVent - Condensation hood to extract steam vapours (no external connection necessary)	£4,762
60.76.174	6-2/1 on 6-2/1 - UltraVent Plus - Condensation and special filter for extracting smoke (no external connection necessary)	£7,620
60.76.222	6-2/1 on 6-2/1 - Exhaust Hood - to extract vapours (external connection required)	£3,715

Adapter Kit	For installation of UltraVent/Extraction Hood on SelfCookingCenter® & CombiMaster® Plus from 09/2011	List Price
60.75.148	Model 6-1/1 and 10-1/1	£305

Please note # There are several different elements used within the stacking of units. These include previous generation units and installation requirements therefore; we would always recommend discussing the individual requirements before placing the order to ensure all factors are covered with your Regional Sales Manager.

Installation Options Combi-Duo

iCombi 6-1/1 on iCombi 10-1/1 & iCombi 6-2/1 on iCombi 10-2/1



for units with a top rack height above 1.6m the installer should apply the safe working label to the unit



Floor - level base set-up	Levelling kit	Kit with castors	Sub-structure	Stand I	Combi-Duo kit electric		Combi-Duo kit gas - XS 6-2/3 on 10-1/1 or 10-2/1 ONLY
0mm (not recommended)	34.5 mm	80 mm	150 mm	200 mm	Height of 145 mm	Height of 30 mm	Height of 145 mm
					XS 6-2/3 on 10-1/1	6-1/1 on 10-1/1	
					XS 6-2/3 on 10-2/2	6-2/1 on 10-2/1	

Top Rack Overall Height	1600mm is the European guideline for safe working practice, however, this is not legislation just a guide.					If you require any assistance, advice or clarification please contact your Regional Sales Manager
Electric (6-1/1 on 10-1/1 & 6-2/1 on 10-2/1)	1669 mm	1703 mm	1749 mm	1819 mm	1869 mm	
Electric (XS 6-2/3 on 10-1/1 or 10-2/1)	1615 mm	1649 mm	1695 mm	1765 mm	1815 mm	
Gas (XS 6-2/3 on 10-1/1 or 10-2/1)	1615 mm	1649 mm	1695 mm	1765 mm	1815 mm	

Stacking Kits	Models 6 -1/1 on 10-1/1 & 6-2/1 on 10-2/1	List Price
60.73.991	Model 6-1/1 E or G on 10-1/1 E (Left & Right Hand Hinge) - Bottom unit Electric only	£665
60.74.725	Model 6-2/1 E or G on 10-2/1 E (Left & Right Hand Hinge) - Bottom unit Electric only	£869
60.75.751	Model 6-2/3 (XS) on 10-1/1 G (Left & Right Hand Hinge) - Bottom unit Gas only	£931
60.75.752	Model XS 6-2/3 on 10-2/1 G (Left & Right Hand Hinge) - Bottom unit Gas only	£1,217
60.75.755	Model XS 6-2/3 on 10-1/1 E (Left & Right Hand Hinge) - Bottom unit Electric only	£931
60.75.756	Model XS 6-2/3 on 10-2/1 E (Left & Right Hand Hinge) - Bottom unit Electric only	£1,217

Stands & Accessories	Models 6 -1/1 on 10-1/1 & 6-2/1 on 10-2/1	List Price
60.74.795	Levelling kit models 6-1/1 on 10-1/1, Dimensions W[850] D[614] H[35]mm	£204
60.74.597	Levelling kit models 6-2/1 on 10-2/1, Dimensions W[1072] D[814] H[35] mm	£232
60.31.622	Kit with height adjustable castors 6-1/1 on 10-1/1, W[948] D[634] H[80] mm	£272
60.31.635	Kit with height adjustable castors 6-2/1 on 10-2/1, W[1170] D[834] H[80] mm	£296
60.31.668	Substructure with feet 6-1/1 on 10-1/1, W[870] D[635] H[150] mm (Option 100mm feet)	£428
60.31.671	Substructure with feet 6-2/1 on 10-2/1, W[1092] D[835] H[150] mm (Option 100mm feet)	£499
60.31.200	Stand I - 6-1/1 on 10-1/1 Standard, Dimensions W[860] D[685] H[200] mm	£428
60.31.201	Stand I - 6-1/1 on 10-1/1 with castors, Dimensions W[883] D[763] H[200] mm	£644
60.31.203	Stand I - 6-2/1 on 10-2/1 Standard, Dimensions W[1082] D[885] H[200] mm	£499
60.31.204	Stand I - 6-2/1 on 10-2/1 with castors, Dimensions W[1105] D[969] H[200] mm	£722

UltraVents (Electric Cooking Systems ONLY)	Models 6 -1/1 on 10-1/1 & 6-2/1 on 10-2/1	List Price
60.76.169	6-1/1 on 10-1/1 UltraVent - Condensation hood to extract steam vapours (no external connection necessary)	£3,768
60.76.173	6-1/1 on 10-1/1 UltraVent Plus - Condensation and special filter for extracting smoke (no external connection necessary)	£6,028
60.76.221	6-1/1 on 10-1/1 Exhaust Hood - to extract vapours (external connection required)	£3,233
60.76.170	6-2/1 on 10-2/1 UltraVent - Condensation hood to extract steam vapours (no external connection necessary)	£4,762
60.76.174	6-2/1 on 10-2/1 UltraVent Plus - Condensation and special filter for extracting smoke (no external connection necessary)	£7,620
60.76.222	6-2/1 on 10-2/1 Exhaust Hood - to extract vapours (external connection required)	£3,715

Adapter Kit	For installation of UltraVent/Extraction Hood on SelfCookingCenter® & CombiMaster® Plus from 09/2011	List Price
60.75.148	Model 6-1/1 and 10-1/1	£305

Please note # There are several different elements used within the stacking of units. These include previous generation units and installation requirements therefore; we would always recommend discussing the individual requirements before placing the order to ensure all factors are covered with your Regional Sales Manager.

Installation Options Combi-Duo

iCombi on SelfCookingCenter® or CombiMaster® Plus or CombiMaster® from 09/2011 to 05/2020 - Right-sided hinge options shown, for left-sided hinge options please contact the office



for units with a top rack height above 1.6m the installer should apply the safe working label to the unit



60.76.169 UltraVent Combi-Duo 6-1/1, 10-1/1

Dimensions W | D | H: 854 | 970 | 313 mm



60.76.173 UltraVent Plus Combi-Duo 6-1/1, 10-1/1


Dimensions W | D | H: 854 | 970 | 403 mm



iCombi on SelfCookingCenter® or CombiMaster® Plus or CombiMaster® from 09/2011 to 05/2020 for options before this date please contact the office	with Feet		Mobile with Wheels		Stand I		with Feet		Mobile with Wheels		Stand I	
	150 mm		200 mm		210 mm		150 mm		200 mm		210 mm	
Base Unit	SelfCookingCenter® Electric						SelfCookingCenter® Gas					
SelfCookingCenter® 61	60.60.349	£405	60.60.968	£622	60.31.649	£475	60.60.349	£405	60.60.968	£622	60.31.649	£475
SelfCookingCenter® 62	60.60.392	£545	60.60.513	£838	60.31.650	£555	60.60.392	£545	60.60.513	£838	60.31.650	£555
SelfCookingCenter® 101												
SelfCookingCenter® 102												
Oven stand UG I for Combi-Duo model 61 on model 61 height 210 mm (only for Combi-Duo with appliance feet)												

iCombi on SelfCookingCenter® or CombiMaster® Plus or CombiMaster® from 09/2011 to 05/2020 for options before this date please contact the office	with Feet		Mobile with Wheels		Stand I		Sub-structure		Sub-structure options		
	Top	Bottom	Stacking Kit	Adapter - Required for base unit to communicate with the UltraVent hood	Additional Vent Pipe for base unit	Total Height	Top Rack	Total Height	Top Rack	Total Height	Top Rack
Combi Duo Set Up											
iCombi 6-1/1 on SelfCookingCenter® 61	E or G	E	60.76.500	N/A	N/A	1644	1467	1829	1514	1829	1652
iCombi 6-1/1 on SelfCookingCenter® 61	E or G	G	60.74.524			60.76.756	1768	1591	1953	1638	1953
iCombi 6-1/1 on SelfCookingCenter® 61 with UltraVent	E	E	60.76.500	60.76.659	60.76.756	1957	1467	2142	1514	2142	1652
iCombi 6-1/1 on SelfCookingCenter® 61 with UltraVent Plus	E	E	60.76.500	60.76.659		2047	1467	2232	1514	2232	1652
iCombi 6-1/1 on SelfCookingCenter® 62	E or G	G	60.74.797	N/A	60.76.756	1768	1591	1953	1638	1953	1776
iCombi 6-1/1 on SelfCookingCenter® 101	E or G	E	60.76.500			60.76.756	1904	1727	1951	1774	1961
iCombi 6-1/1 on SelfCookingCenter® 101 with UltraVent	E	E	60.76.500	60.76.659	N/A	2217	1727	2264	1774	2274	1774
iCombi 6-1/1 on SelfCookingCenter® 101 with UltraVent Plus	E	E	60.76.500	60.76.659		2307	1727	2354	1774	2364	1774
iCombi 6-2/1 on SelfCookingCenter® 62	E or G	E	60.76.575	N/A	60.76.756	1644	1467	1691	1514	1829	1652
iCombi 6-2/1 on SelfCookingCenter® 62	E or G	G	60.74.797			60.76.756	1768	1591	1953	1638	1953
iCombi 6-2/1 on SelfCookingCenter® 62 with UltraVent	E	E	60.76.575	60.76.659	N/A	1957	1467	2142	1514	2142	1652
iCombi 6-2/1 on SelfCookingCenter® 62 with UltraVent Plus	E	E	60.76.575	60.76.659		2051	1467	2236	1514	2236	1652
iCombi 6-2/1 on SelfCookingCenter® 102	E or G	E	60.76.575	N/A	N/A	2028	1727	2075	1774	2085	1774
iCombi 6-2/1 on SelfCookingCenter® 102 with UltraVent	E	E	60.76.575	60.76.659		2217	1727	2264	1774	2274	1774
iCombi 6-2/1 on SelfCookingCenter® 102 with UltraVent Plus	E	E	60.76.575	60.76.659	2311	1727	2358	1774	2368	1774	

For base SelfCookingCenter® & CombiMaster® Plus units that were not previously part of a Combi-Duo it is important to fit one of the following substructures

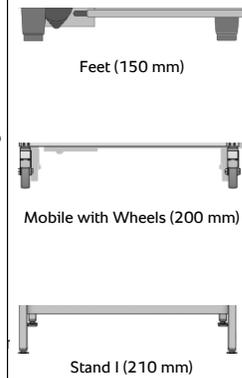

Please note # There are several different elements used within the stacking of units. These include previous generation units and installation requirements therefore; we would always recommend discussing the individual requirements before placing the order to ensure all factors are covered with your Regional Sales Manager.