



*Technical information  
Hurricane bottle coolers*

**imc**  
fresh thinking

*display  
performance  
value*

## **overview**

*Hurricane bottle coolers are available in single and double door versions, with a choice of black or silver painted finishes. Each unit comes with adjustable shelving, temperature display and internal light as standard.*

*Features include electronic controller with auto defrost and forced air cooling for greater energy efficiency, a robust construction ensures long term reliability and low operating costs.*

### **Additional features include:**

- *Replaceable door seal for easy cleaning and increased product life span*
- *CFC-free and ozone friendly*
- *Ventilation to front of cabinet ensuring units can be fully built in*
- *Can be installed side by side with no gaps*

### **Standard Models**

*H60 Single hinged door*

*H90 Double hinged door*

### **Options**

*Two pin plug - for use in mainland Europe*

*Lock - for secure storage of contents*

## **product conformity**

*Hurricane bottle coolers are manufactured in accordance with the following European Directives:*

*Machinery Directive (2006/42/EC)*

*Low Voltage Directive (73/23/EEC)*

*Electromagnetic Compatibility Directive (2004/108/EC)*

*Pressure Equipment Directive (97/23/EC)*


*And in accordance with the following harmonised European Standards:*

*EN 55014-1 Emissions and EN 55014-2 Immunity  
(plus product specific standards)*

*BS EN 60335-1 and BS EN 60335-24*


# product details

## H60

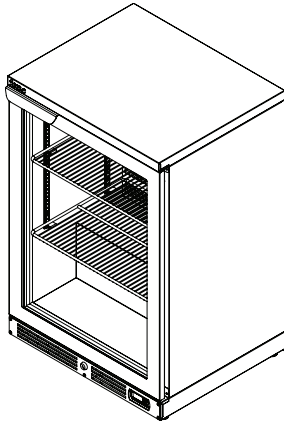

<b>Storage Capacity</b>		
330ml Bottles	135	
<b>Operating Temperature</b>		
Internal Operating Temperature (°C)	+4(+/- 2)	
<b>Shipping Specifications</b>		
Weight (kg) (Net)	51	
Weight (kg) (Gross)	56	
Packing Size (mm) (hxxxd)	1020 x 620 x 530	
Packing Volume (m <sup>3</sup> )	0.34	
<b>Electrical Information</b>		
Voltage (Volts)	230	
Frequency (Hz)	50	
Phase	single	
Current Draw (Amps)	0.83	
<b>Maximum Dimensions</b>		
	<b>Internal</b>	<b>External</b>
Height (mm)	763	900
Width (mm)	536	600
Depth (mm)	381	500
<b>Product Code Detail</b>		
Options	Black	Silver
Standard	F74/060 B	F74/060 S
Standard with Lock	F74/060 BL	F74/060 SL
Euro Plug	F74/060 B EU	F74/060 S EU
Euro Plug with Lock	F74/060 BL EU	F74/060 SL EU

## H90

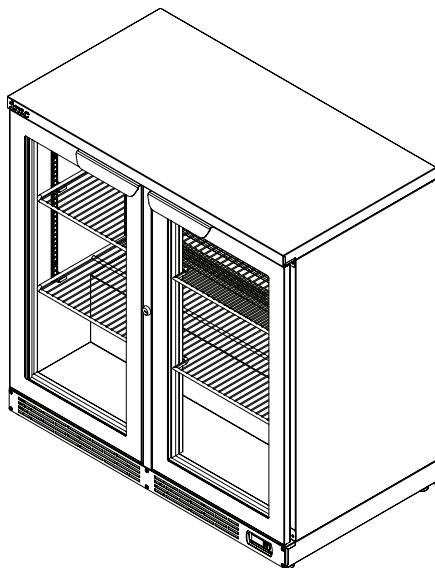

<b>Storage Capacity</b>		
330ml Bottles	204	
<b>Operating Temperature</b>		
Internal Operating Temperature (°C)	+4(+/- 2)	
<b>Shipping Specifications</b>		
Weight (kg) (Net)	73.5	
Weight (kg) (Gross)	79	
Packing Size (mm) (hxxxd)	1050 x 960 x 570	
Packing Volume (m <sup>3</sup> )	0.58	
<b>Electrical Information</b>		
Voltage (Volts)	230	
Frequency (Hz)	50	
Phase	single	
Current Draw (Amps)	0.75	
<b>Maximum Dimensions</b>		
	<b>Internal</b>	<b>External</b>
Height (mm)	763	900
Width (mm)	836	900
Depth (mm)	381	500
<b>Product Code Detail</b>		
Options	Black	Silver
Standard	F74/090 B	F74/090 S
Standard with Lock	F74/090 BL	F74/090 SL
Euro Plug	F74/090 B EU	F74/090 S EU
Euro Plug with Lock	F74/090 BL EU	F74/090 SL EU



*IMC* was founded in 1906 and has since established itself as a leading manufacturer of commercial catering and bar equipment, with a reputation for quality, innovation and unrivalled customer service.

**Imperial Machine Company Ltd**

Unit 1 Abbey Road  
Wrexham Industrial Estate  
Wrexham LL13 9RF  
United Kingdom

**t** +44 (0)1978 661155

**f** +44 (0)1978 729990

**e** [sales@imco.co.uk](mailto:sales@imco.co.uk)

**w** [www.imco.co.uk](http://www.imco.co.uk)

*IMC reserves the right to make changes without prior notification*

**imc**  
freshthinking

BDB/HBC-TV/0110